

Metal Rocker Switch Series



P/10

LBCX16

迷你圆形船型开关
Mini Rocker Switch
Ith:7A 250VAC



常规电压:5-24V 220V, 定制其它电压
Normal Voltage:5-24V 220V, Customizable Other Voltage
常规颜色:红色、绿色;定制:蓝色、黄色、白色
Normal Color:Red/Green;Customizable:Blue/Yellow/White



Ith:7A
大电流开关
High-Current



2000VAC
高绝缘耐压
High-Insulation



Metal
金属外壳
Metal Shell



50000H
长寿命灯珠
Long Life LED



20万次
机械寿命
Mechanical Life



2档
档位清晰
2 Gears



-40~80°C
环境耐温强
Environment



CCC RoHS REACH CE
专利及认证
Certificate




带指示灯
LED




加粗镀银插脚,触点
Bold Silver Plated Pins, High-Current








数控加工, 外观高档
CNC, High-grade

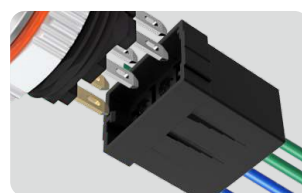


专用接插件
Connector

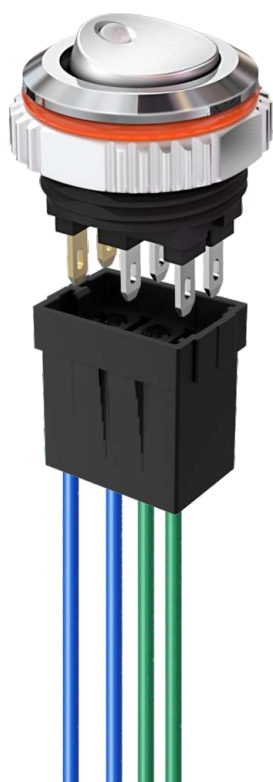

NO脚蓝线 NO Pin blue line
NC脚黄线 NC Pin yellow line
C公共脚绿线 C Public Pin green line

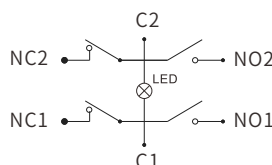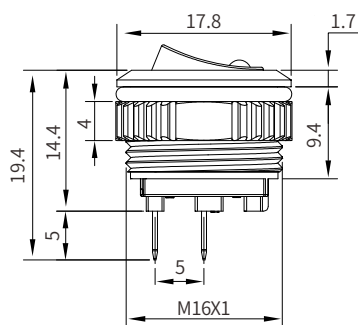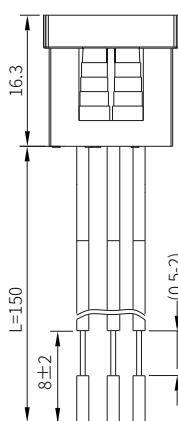

带灯 (2档/6脚)
With LED (2 Gears/6PINS)



带灯 (2档/4脚)
With LED (2 Gears/4PINS)

0.5mm²国标铜芯线
长度L: 150mm;可定制线长
0.5mm² copper core wire
L: 150mm; length can be customized

此接插件适用于LBCX16、LBCX1409
This connector is suitable for LBCX16 and LBCX1409

LBCX20

船型开关
Rocker Switch
Ith:20A 250VAC



外壳材质: 镀铬, 可定制不锈钢、铝氧化
Material: chrome plating;
Customizable: Stainless steel/Aluminum oxidation
常规电压: 5-24V 250V, 定制其它电压
Normal Voltage: 5-24V 250V, Customizable Other Voltage
常规颜色: 红色、绿色、蓝色; 定制: 黄色、白色
Normal Color: Red/Green/Blue/Customizable: Yellow/White



Ith:20A
大电流开关
High-Current



2000VAC
高绝缘耐压
High-Insulation



Metal
金属外壳
Metal Shell



50000H
长寿命灯珠
Long Life LED



10万次
机械寿命
Mechanical Life



底座V0
耐温阻燃
Antif Laming



-40~80°C
环境耐温强
Environment



CCC RoHS REACH CE
专利及认证
Certificate




H57镀铬外壳, 坚固耐用
H57 chrome plating








H65镀银引脚
Silver tin oxide




LED灯珠, 寿命达50000小时
Momentary with LED




V2级阻燃
Antif Laming

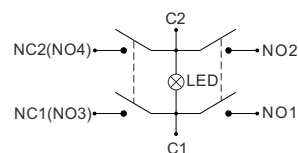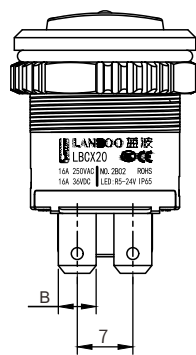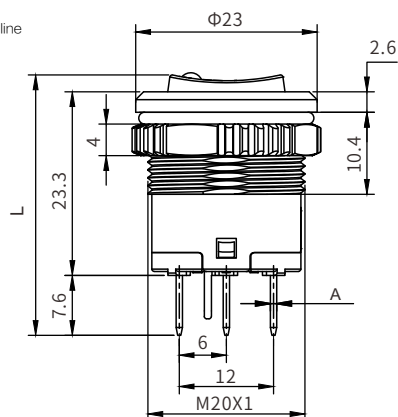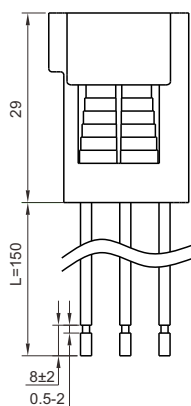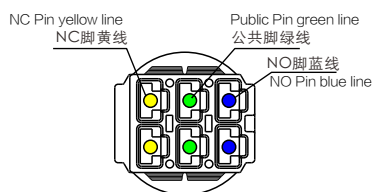

6脚 (3档) 原理图
Schematic diagram of 6-pin (3rd gear)

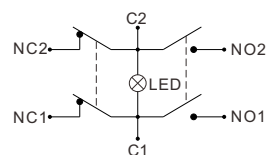

6脚 (2档) 原理图
Schematic diagram of 6-pin (2nd gear)



4脚 (2档) 原理图
Schematic diagram of 4-pin (2nd gear)

1.5mm²国标铜芯线
长度L: 150mm; 可定制线长
1.5mm² copper core wire
L: 150mm; length can be customized

型号	L	A	B
LBCX20-Y403	33	6-0.8±0.02	6-4.8±0.05
LBCX20-Y222	34.5	6-0.8±0.02	6-4.8±0.05
LBCX20-Y202	34.5	4-0.8±0.02	4-4.8±0.05

LBCX1409

迷你金属船型开关

Mini Rocker Switch

Ith:10A 250VAC



绚丽黑

土豪金

天山银

低功耗LED: $\leq 20\text{mA}$

Low Power Consumption LED: $\leq 20\text{mA}$

常规电压: 5-24V 220V, 定制其它电压

Normal Voltage: 5-24V 220V, Customizable Other Voltage

常规颜色: 红色、绿色; 定制: 蓝色、黄色、白色

Normal Color: Red/Green; Customizable: Blue/Yellow/White



Ith:10A
大电流开关
High-Current



2000VAC
高绝缘耐压
High-Insulation



6063
铝氧化面板
Aluminium Oxidized



50000H
长寿命灯珠
Long Life LED



20万次
机械寿命
Mechanical Life



2/3档
档位清晰
2/3 Gears



-40~80°C
环境耐温强
Environment



CCC RoHS CE
专利及认证
Certificate




3档标识
3 Gears mark





铝铝切割面板, 带指示灯
Aluminium Cutting panel, LED




加粗镀银插脚, 触点
Bold Silver Plated Pins, High-Current




专用接插件
Connector







带灯 (3档/6脚)
With LED (3rd gear/6-pin)



带灯 (2档/6脚)
With LED (2rd gear/6-pin)



带灯 (2档/4脚)
With LED (2rd gear/4-pin)

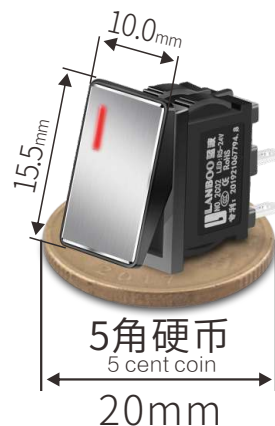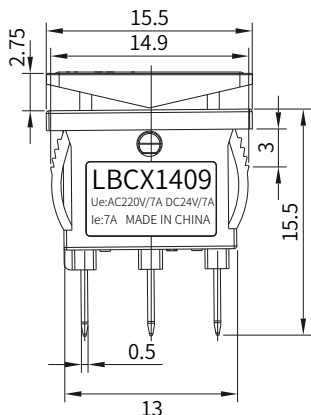


LBCX2810.5 Roker 船型

大电流金属KCD3

High-Current KCD3

Ith: 20A 250VAC

2NO



LED发光颜色
LED Color

面板颜色
Panel Color

低功耗LED: $\leq 20\text{mA}$


Low Power Consumption LED: $\leq 20\text{mA}$

常规电压: 9-24V 250V, 定制其它电压

Normal Voltage: 9-24V 250V, Customizable Other Voltage

常规颜色: 红色、绿色; 定制: 蓝色、黄色、白色

Normal Color: Red / Green; Customizable: Blue / Yellow / White

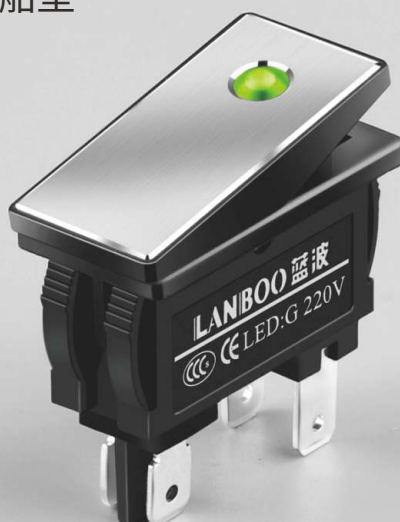

Ith

大电流开关
High-Current



3000VAC

高绝缘耐压
High-Insulation



6063

铝氧化面板
Aluminum Oxidized



50000H

长寿命灯珠
Long Life LED



20万次

机械寿命
Mechanical Life



底座V0

耐温阻燃
Antif Laming



-40~80°C

环境耐温强
Environment



CCC RoHS REACH CE

专利及认证
Certificate



铝切割面板, 高亮面边框
Aluminum Cutting panel





加粗镀银插脚, 触点, 大电流
Bold Silver Plated Pins, High-Current



带指示灯
LED



请认准“蓝波”
LANBOO BUTTON

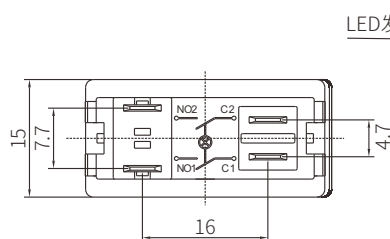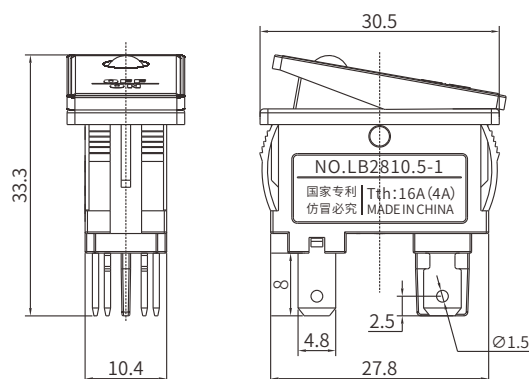

LED发光指示

