

KK单轴驱动器

❗ 产品不包含马达。



Technical drawing of a sliding bearing assembly, showing three views: front view, side view, and cross-section A-A.

Front View (Top): Shows the bearing housing with dimensions: 86 (width), 74.5 (height), 64 (height), 180 (height), 62 (width), 105.5 (height), and 60 (width).

Side View (Middle): Shows the bearing housing with dimensions: 50.2 (width), 20 (width), 13 (width), 185.2 (height), 100 (height), 70 (width), 100 (width), $(n-1) \times 100$ (width), 0.5 (width), and 60 (height).

Cross-section A-A (Bottom): Shows the bearing housing with dimensions: 60 (width), 46 (width), 30 (height), 32 (height), 20 (width), 46 (width), 4.5 (width), 19 (width), 86 (width), and 6.5 (width). The cross-section also shows the bearing housing with dimensions: 116 (width), 75 (width), 46 (width), 2-M2.5深4 (2-M2.5 deep 4), 4-M6深12 (4-M6 deep 12), 2-M4深10 (2-M4 deep 10), 2x n-Ø6.6 (2x n-Ø6.6), 沉孔Ø11深6 (counterbore Ø11 deep 6), 15深2.2 (15 deep 2.2), 2x m-M2.5深4 (2x m-M2.5 deep 4), 7.5 (width), 200 (width), $(m-1) \times 200$ (width), 6.5 (width), and 74 (width).


视角标准：第一视角

型号		轨道长度 L	滑座数量	精度等级	马达 安装方式	马达连接 支座选择	极限开关/安装轨道 选择	滚珠丝杠		工作台长度 L ₁	H	n	m	最大行程		重量(kg)		
代码	规格							轴径	导程					单滑座	双滑座	单滑座	双滑座	
KK86B	1510	340					不标识: (无) S0 (只有极限轨道) S1 (极限轨道+ SX671 NPN) S2 (极限轨道+ SX674 NPN) S2P (极限轨道+ SX674 PNP)	15	10	423.2	70	3	2	210	100	5.6	6.4	
	1520								20									
	1510	440							10	523.2	20	4	3	310	200	6.8	7.6	
	1520								20									
	1510	540	1(单滑座)	C(一般级)	BM(马达下装)	F0			10	623.2	70	5		410	300	7.9	8.7	
	1520								20									
	1510	640	2(双滑座)	P(精密级)	BR(马达右装)	F1			10	723.2	20	6	4	510	400	9.1	9.9	
	1520								20									
	1510	740							10	823.2	70	7		610	500	10.3	11.1	
	1520								20									
1510	940						10	1023.2	70	9	5	810	700	11.5	12.3			
1520							20											


KK单轴驱动器

86系列 · 标准型 · 马达侧装 无护盖

马达连接支座及与马达对应表

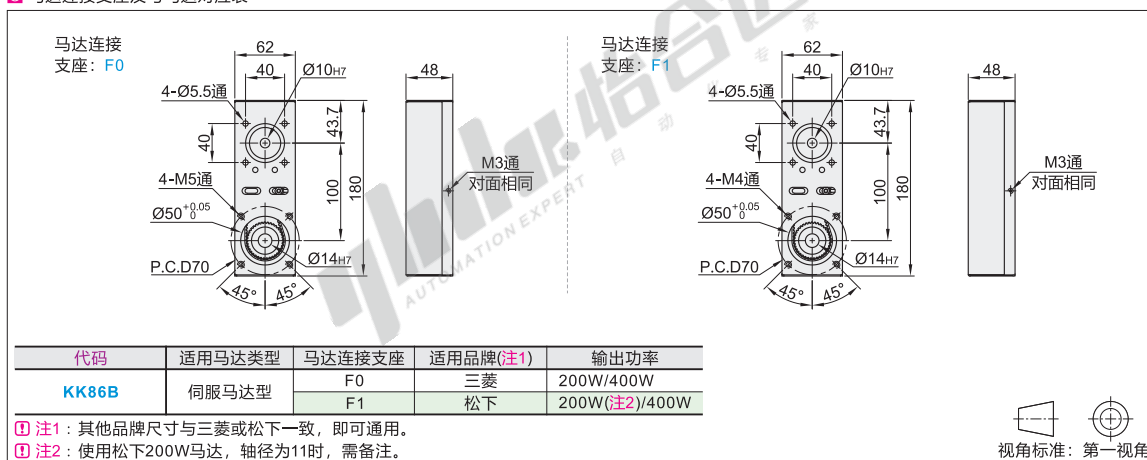

极限开关/安装轨道尺寸

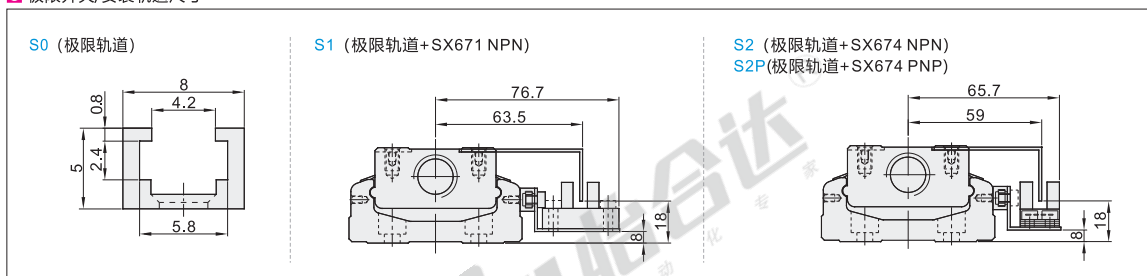

精度等级


代码	轨道长度 L	反覆定位精度		定位精度		行走平行度		最大启动扭力(N·cm)	
		一般级	精密级	一般级	精密级	一般级	精密级	一般级	精密级
KK86B	340								
	440								
	540	±0.01	±0.003		0.025		0.015		15
	640							10	
	740				0.030		0.020		17
	940				0.040		0.030		25

容许负载

代码	导程	精度等级	基本额定负载(N)			
			滚珠丝杠		直线导轨	
			C(动)	Co(静)	C(动)	Co(静)
KK86B	10	一般级	3377	5625	31458	50764
		精密级	3744	6243		
	20	一般级	2107	3234		
		精密级	2410	3743		

容许静力矩

代码	精度等级	容许静力矩					
		直线导轨					
		俯仰Mp(N·m)		偏摆My(N·m)		滚动Mr(N·m)	
KK86B	一般级	单滑座	双滑座	单滑座	双滑座	单滑座	双滑座
	精密级	622	3050	622	3050	1507	3014

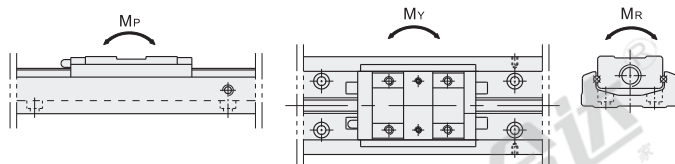

型号	规格	轨道长度 L	滑座数量	精度等级	马达 安装方式	马达连接 支座选择	极限开关/安装轨道选择
KK86B	1520	340	1(单滑座)	C(一般级)	BM(马达下装)	F0	不标识: (无)
	1510	440	2(双滑座)	P(精密级)	BR(马达右装)	F1	S0 (只有极限轨道)
	1520				BL(马达左装)		S2 (极限轨道+ SX671 NPN)

KK86B-1510-L340-1-C-BR-F1-S1



优惠价	数量	1~5	6~
价格	100%	另行报价	

