


无防尘盖式
进口型

深沟球轴承

代码	类型	轴承类型 代码	轴承精度	轴承材质	
				国标	相当
BAR...J	进口型	6	GB/T 307.1 6级	GCr15	SUJ2
J-BAR06		16			

安装图

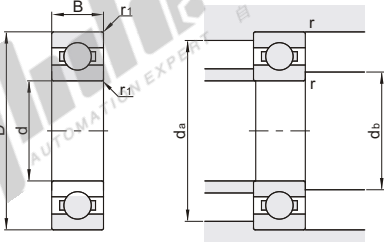

- ① 出厂前未封入润滑脂，请在使用前封入。
② 不承诺品牌。



视角标准：第一视角

轴承类型代码6

型号		d	D	B	r1 (min)	基本额定负载(KN)		极限转速 rpm (参考)	安装尺寸				重量 (g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		db		da (max)	r (max)	
									(min)	(max)			
BAR...J	6700	10	15	3	0.2	0.85	0.43	15000	10.4	11.21	14.2	0.2	5
	6800		19	5		1.83	0.93	24000		12.5	17		
	6900		22	6	0.3	2.7	1.27	21000	12	13	20	0.3	9
	6000		26	8		4.55	1.97	21000		13.5	24		19
	6200	12	30	9	0.6	5.1	2.39	18000	14	16	26	0.6	32
	6701		18	4	0.2	1.1	0.7	8300	13.6	13.8	16.4	0.2	2
	6801		21	5		1.92	1.04	20000		14.5	19		6
	6901		24	6	0.3	2.89	1.46	19000	14	15	22	0.3	11
	6001	15	28	8		5.1	2.37	18000		16	26		22
	6201		32	10	0.6	6.82	3.08	16000	16	17	28	0.6	37
	6802		24	5		2.1	1.25	17000		17.5	22		7
	6902		28	7	0.3	4.3	2.3	16000	17		26	0.3	16
	6002	17	32	9		5.6	2.84	15000		19	30		30
	6202		35	11	0.6	7.6	3.7	15000	19	20	31	0.6	45
	6803		26	5		2.2	1.5	15000		19.5	24		8
	6903		30	7	0.3	4.6	2.6	14000	19	20	28	0.3	18
	6003	20	35	10		6	3.25	14000		21	33		39
	6203		40	12	0.6	9.57	4.8	12000	21	23	36	0.6	66
	6804		32	7		3.5	2.2	13000		22.5	30		19
	6904		37	9	0.3	6.4	3.7	12000	22	24	35	0.3	36
	6004	25	42	12	0.6	9.38	5.03	11000		26	38	0.6	69
	6204		47	14	1	12.8	6.65	10000	25		42	1	106
	6805		37	7		4.3	2.95	10000		28	35		22
	6905		42	9	0.3	7.02	4.53	9800	27	29	40	0.3	42
	6005	30	47	12	0.6	10.07	5.82	9400	29	30.5	43	0.6	80
	6205		52	15	1	14	7.88	8900	30	32	47	1	128
	6806		42	7		4.96	3.62	8800		33	40		26
	6906		47	9	0.3	7.24	5	8400	32	34	45	0.3	48
	6006	35	55	13		13.2	8.27	7700		37	50		116
	6206		62	16	1	19.5	11.3	7300	35	39	57	1	199
	6807		47	7	0.3	4.2	3.5	7600	37	38	45	0.3	29
	6907		55	10	0.6	9.6	6.8	7100	39	40	51	0.6	74
	6007	40	62	14	1	15.9	10.3	6800	40	42	57		155
	6207		72	17	1.1	25.7	15.3	6300	41.5	45	65.5	1	288
	6808		52	7	0.3	5.07	4.37	6700	42	43	50	0.3	33
	6908		62	12	0.6	13.7	9.9	6300	44	45	58	0.6	110
	6008	50	68	15	1	16.8	11.5	6100	45	47	63		190
	6208		80	18	1.1	30.8	19.8	5800	46.5	51	73.5	1	366
	6010		80	16	1	21.8	16.6	4600	55	57.5	75		261
	6210		90	20	1.1	35	23.2	4700	56.5	60	83.5	1	454
	6811	55	72	9	0.3	9.1	8.5	4800	57	59	70	0.3	83
	6911		80	13	1	15.96	13.25	4300	60	61.5	75		180
	6011		90	18	1.1	30.9	22.4	4500	61.5	64	83.5	1	388
	6812		78	10	0.3	9.1	8.7	4400	62	64.5	76	0.3	106
	6912	60	85	13	1	28.7	17.2	4300	65	66.5	80		193
	6012		95	18	1.1	30.7	22.7	4100	66.5	69	88.5	1	414
	6813		85	10	0.6	11.9	11.5	4100	69	70	81	0.6	128
	6913		90	13	1	17.4	16.1	4000	70	71.5	85		206
	6013	65	100	18	1.1	29.2	23.5	3900	71.5	74	93.5	1	421

① 1Kg=9.81N

深沟球轴承

无防尘盖式 进口型

轴承类型代码6

代码	型号	d	D	B	r ₁ (min)	基本额定负载		极限转速 rpm (参考)	安装尺寸				重量 (g) (参考)
						Cr(动)	Cor(静)		(min)	d _b (max)	d _a (max)	r (max)	
BAR...J	6814	70	90	10	0.6	12.2	11.9	3800	74	75.5	86	0.6	137
	6914		100	16	1	23.7	21.1	3700	75	77.5	95		334
	6014		110	20	1.1	38.6	30.4	3600	76.5	80.5	103.5	1	604
	6815	75	95	10	0.6	12.5	12.8	3600	79	80	91	0.6	145
	6915		105	16	1	24.3	22.5	3500	80	82.5	100	1	353
	6015		115	20	1.1	40.1	33.1	3300	81.5	85.5	108.5	1	649
	6816	80	100	10	0.6	12.8	12.7	3400	84	85	96	0.6	154
	6916		110	16	1	25	23.9	3200	85	88	105		373
	6016		125	22	1.1	47.5	39.8	3100	86.5	91.5	118.5		854
	6817	85	110	13	1	19.8	19.2	3100	90	91	105		270
	6917		120	18	1.1	31.9	29.7	3000	91.5	94	113.5	1	536
	6017		130	22	1.1	52.8	44.5	2900		97	123.5		890
	6818	90	115	13	1	19	19.7	3000	95	96	110		285
	6918		125	18	1.1	32.8	31.5	2900	96.5	99	118.5		554
	6018		140	24	1.5	61.2	50.6	2800	98	102	132	1.5	1020
	6819	95	120	13	1	20.8	19.8	2800	100	101	115	1	300
	6919		130	18	1.1	33.7	33.4	2800	101.5	104	123.5	1	579
	6019		145	24	1.5	60.8	51	2600	103	109	137	1.5	1080
	6820	100	125	13	1	20.1	22	2700	105	106	120		313
	6920		140	20	1.1	42.7	41.9	2600	106.5	110	133.5	1	783
	6020		150	24	1.5	60.2	54.2	2600	108	110	142	1.5	1150
	6821	105	130	13	1	19.8	22	4800	110	110.5	125	1	330
	6921		145	20	1.1	42.5	42	2500	111.5	115	138.5	1	816
	6021		160	26	2	59.2	61.2	2400	114	119	151	2	1590
	6822	110	140	16	1	28.1	30.7	4300	115	117	135		515
	6922		150	20	1.1	43.5	44.5	2400	116.5	120	143.5	1	849
	6022		170	28	2	82	73	2300	119	126	161	2	1960
	6824	120	150	16	1	28.9	32.1	4000	125	127	145	1	555
	6924		165	22	1.1	53	53.9	3800	126.5	132	158.5	1	1150
	6024		180	28	2	88.1	79.7	2100	129	136	171	2	2070
	6826	130	165	18	1.1	37.9	42.9	3600	136.5	138	158.5	1	800
	6926		180	24	1.5	65.1	67.2	3400	138	144	172	1.5	1520
	6026		200	33	2	105	96.8	3200	139	148	191	2	3160
	6828	140	175	18	1.1	38.2	44.3	3400	146.5	148.5	168.5	1	850
	6928		190	24	1.5	68.5	71.5	3200	148	153.5	182	1.5	1620
	6028		210	33	2	105.4	101.8	3000	149	158	201	2	3350
	6830	150	190	20	1.1	47.5	55	3000	156.5	160	183.5	1	1160
	6930		210	28	2	84.7	90.2	2800	159	166	201	2	2470
	6030		225	35	2.1	131.7	124.5	2600	161	169	214	2	4080

轴承类型代码16

1Kg=9.81N

型号		d	D	B	r ₁ (min)	基本额定负载(KN)		极限转速	安装尺寸		r(max)	重量(g) (参考)
代码	轴承型号					Cr(动)	Cor(静)	rpm(参考)	d _b (min)	d _a (max)		
J-BAR06	16001	12	28	7	0.3	5.1	2.37	32000	14	26	0.3	19
	16002	15	32			5.6	2.83	28000	17	30		27
	16003	17	35			6	3.25	26000	19	33		33
	16004	20	42	8		7.9	4.45	20000	22	40		48
	16005	25	47			8.85	5.6	18000	27	45		59
	16006	30	55			11.2	7.35	15000	32	53		87
	16007	35	62	9	0.6	11.7	8.2	13000	37	60	0.6	107
	16008	40	68			12.6	9.65	12000	42	66		130
	16009	45	75	10		14.9	11.4	11000	49	71		167
	16010	50	80			15.4	12.4	10000	54	76		175
	16011	55	90			19.4	16.3	9000	59	86		257
	16012	60	95	11		20	17.5	8500	64	91		281
	16013	65	100			20.5	18.7	8000	69	96		300
	16014	70	110			26.8	23.6	7100	74	106		441
	16015	75	115	13		27.6	25.3	6700	79	111		463
	16016	80	125			32	29.6	6300	84	121		621
	16017	85	130			33	31.5	6000	89	126		652
	16018	90	140	14		1	41.5	39.5	5600	95		135
	16019	95	145		43		42	5300	100	140	904	
	16020	100	150		42.5				105	145	945	
	16021	105	160		52		50.5	4800	110	155	1240	
	16022	110	170		57.5		56.5	4500	115	165	1510	
	16024	120	180		56.5		57.5	4300	125	175	1600	
	16026	130	200	22	1.1	75.5	77.5	3600	136.5	193.5	1.5	2400
	16028	140	210			77.5	82.5	3400	146.5	203.5		2840
	16030	150	225			84	91	3000	156.5	218.5		3620
	16032	160	240	99		108	2800	168	232	4200		
	16034	170	260	28		114	126	2600	178	252		5710
	16036	180	280	31		145	157	2400	189	271		7500
	16038	190	290		149	168	199		281	7780		
	16040	200	310		34	161	180		2200	209	301	10000

轴承类型代码6

代码	型号	d
BAR	6700	10
	6800	

BAR6700-J


轴承类型代码16

代码	型号	d
J-BAR06	16001	12
	16002	15

J-BAR06-16001

EX
Example
使用示例

① 深沟球轴承内部装配轴，外部固定块用于固定，起到支撑、传动的作用。



1Kg=9.81N

请按图示订货

优惠价
数量 1~9 10~
价格 100% 另行报价
未税价(元)

交货期
5