


# TR 带座轴承

立式座外球面球轴承·耐高温250℃  
铸造型

| 代码           | 类型                | 材质       |       |
|--------------|-------------------|----------|-------|
|              |                   | 轴承座      | 轴承    |
| UCP...HT2-TR | 立式座外球面球轴承 耐高温250℃ | HT200灰铸铁 | GCr15 |

TR

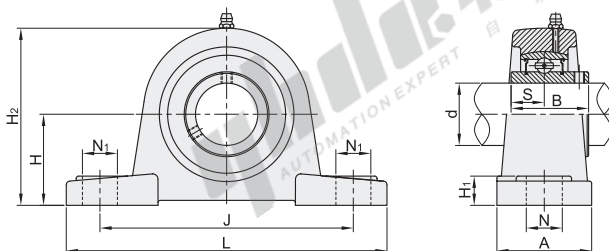

视角标准：第一视角

| 型号            | d  | H     | L   | J   | A  | N  | N <sub>1</sub> | H <sub>1</sub> | H <sub>2</sub> | S    | B    | 螺栓  | 紧定扭力<br>(N·m) | 额定负载(N) |        | 重量<br>(kg) |
|---------------|----|-------|-----|-----|----|----|----------------|----------------|----------------|------|------|-----|---------------|---------|--------|------------|
|               |    |       |     |     |    |    |                |                |                |      |      |     |               | 动(Cr)   | 静(Cor) |            |
| UCP204HT2-TR* | 20 | 33.3  | 127 | 96  | 37 | 13 | 16             | 14             | 65             | 12.7 | 31   | M10 | 12~21         | 12800   | 6650   | 0.69       |
| UCP205HT2-TR* | 25 | 36.5  | 140 | 105 | 38 |    |                | 15             | 71             | 14.3 | 34   |     |               | 14000   | 7880   | 0.82       |
| UCP206HT2-TR* | 30 | 42.9  | 160 | 121 | 44 | 14 | 19             | 16             | 83             | 15.9 | 38.1 |     |               | 19500   | 11200  | 1.22       |
| UCP207HT2-TR* | 35 | 47.6  | 167 | 126 | 48 |    |                | 17             | 93             | 17.5 | 42.9 | M12 | 21~37         | 25700   | 15200  | 1.61       |
| UCP208HT2-TR* | 40 | 49.2  | 180 | 136 | 52 | 15 | 21             | 18             | 100            |      | 49.2 |     |               | 29600   | 18200  | 1.99       |
| UCP209HT2-TR* | 45 | 54    | 190 | 146 | 54 |    |                | 20             | 108            | 19   |      |     |               | 31850   | 20800  | 2.36       |
| UCP210HT2-TR  | 50 | 57.2  | 204 | 159 | 57 |    | 22             | 21             | 114            |      | 51.6 | M16 | 53~93         | 35100   | 23200  | 2.73       |
| UCP211HT2-TR  | 55 | 63.5  | 217 | 172 | 60 | 19 | 22             | 22             | 126            | 22.2 | 55.6 |     |               | 43550   | 29200  | 3.42       |
| UCP212HT2-TR  | 60 | 69.9  | 238 | 186 | 66 |    | 25             | 24             | 138            | 25.4 | 65.1 |     |               | 47800   | 32800  | 4.66       |
| UCP215HT2-TR  | 75 | 82.6  | 274 | 217 | 74 | 25 | 29             | 28             | 164            |      | 77.8 | M20 | 105~190       | 66000   | 49500  | 7.43       |
| UCP216HT2-TR  | 80 | 88.9  | 292 | 232 | 78 |    | 30             | 30             | 175            | 33.3 | 82.6 |     |               | 71500   | 54200  | 8.83       |
| UCP218HT2-TR  | 90 | 101.6 | 326 | 262 | 88 | 27 | 30             | 33             | 200            | 39.7 | 96   | M22 | 145~260       | 95900   | 71500  | 12.8       |

① 带\*型号轴承座凹球面公差为间隙配合，其他型号为过渡配合。



请按图示订货

型号

UCP218HT2-TR



未税价(元)

优惠价

数量 1~9 10~  
价格 100% 另行报价



交货期

10