

圆螺母

代码	类型	螺纹	材质		表面处理	适用标准	强度等级
			国标	相当			
TBK71	小圆螺母	细牙	45	S45C	发黑	GB/T 810	8
TBK74	圆螺母		0Cr18Ni9	SUS304	—	GB/T 812	—
TBK75							

TBK71




TBK74




TBK75



小圆螺母
TBK71

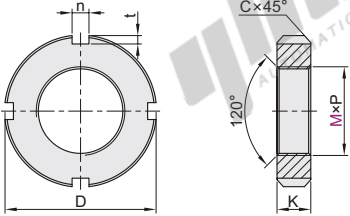

圆螺母
TBK74
TBK75

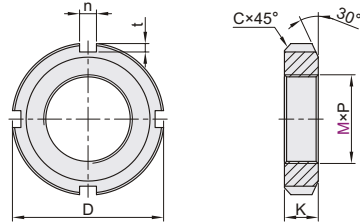

① M≤100, N(槽数)=4
M≥105, N(槽数)=6

视角标准：第一视角

小圆螺母

代码	型号	M	螺距P	D	C	K	n		t	
							max	min	max	min
	10	1.0	20							
	12	1.25	22				4.3	4	2.6	2
	14	25								
	16	28			0.5	6				
	18	30								
	20	32								
	22	35								
	24	38					5.3	5	3.1	2.5
	27	42								
	30	45				8				
	33	48								
	36	52								
	39	55								
	42	58					6.3	6	3.6	3
	48	68								
	52	72								
	56	78				10				
	60	80					8.36	8	4.25	3.5
	64	85								
	68	90								
	72	95								
	76	100								
	80	105								
	85	110				12	10.36	10	4.75	4
	90	115			1					
	95	120								
	100	125								
	105	130								
	110	135					12.43	12	5.75	5
	115	140								
	120	145								
	125	150								
	130	160								
	140	170					14.43	14	6.75	6
	150	180								
	160	195								
	170	205								
	180	220								
	190	230				22	16.43	16	7.9	7
	200	240								

(S45C)
TBK71


圆螺母

代码	型号	M	螺距P	D	C	K	n		t	
							max	min	max	min
	10	1.0	22							
	12	1.25	25				4.3	4	2.6	2
	14	28								
	16	30			0.5	8				
	18	32								
	20	35								
	22	38								
	24	42					5.3	5	3.1	2.5
	25	45								
	27	48			1					
	30	52								
	33	55								
	35	58								
	36	62								
	39	68					6.3	6	3.6	3
	40	72								
	42	78								
	45	80			1.5					
	48	85								
	50	90					8.36	8	4.25	3.5
	72*	2	105			15				

① 带*的规格不适用TBK75。



圆螺母止动垫圈



① 使用时圆螺母止动垫圈装在螺母开槽的那一侧，紧固后将内外止动耳折弯放到槽内。圆螺母紧固后，将内外耳扳成轴向，分别卡在轴上的键槽和圆螺母的开口处，这样，圆螺母就不会由于轴的转动而松脱。



请按图示订货

小圆螺母

代码	M	螺距P
(TBK71)	10	1.0
(TBK71)	12	1.25

TBK71—M10



未税价(元)

优惠价

数量	1~45	46~
价格	100%	另行报价



交货期

7