

无油衬套

直柱型/肩型

铸铁(FC250)


代码	类型	材质	内径公差	外径公差	使用温度
OFX71	直柱型	铸铁(FC250)	F7	m6	-40°C~150°C
OFX72	肩型	镶嵌固体润滑剂	E7	r6	

特点: 不含铜, 受温度影响变形小。


本产品为铸铁(FC250)材质易生锈, 拆开包装后请做好防锈措施, 避免使用前生锈。



直柱型
OFX71

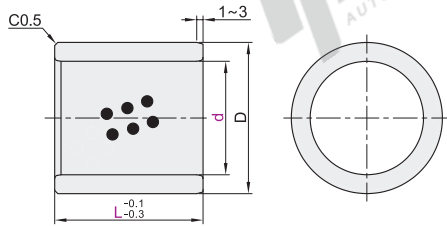

肩型
OFX72

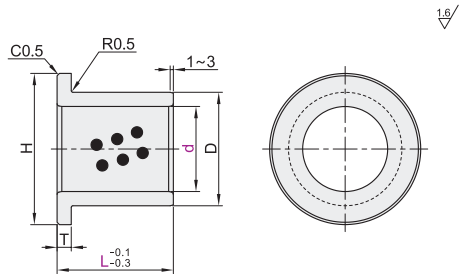

推荐配套轴公差: d8: 一般用(高负载) f8: 高精度用

e7: 一般用(低负载) g6: 高精度用(间歇运转)

推荐配套固定座内孔公差为: H7



型号			L		Dm6		H		T	
代码	dF7									
OFX71	5	+0.022 +0.010	8 10 12 15		9	+0.015 +0.006	14			
	6		8 10 12 15 20		10		16			2
	8	+0.028 +0.013	8 10 12 15 20		12	+0.018 +0.007	20			
	10		10 12 15 20		14		22			
	12	+0.034 +0.016	12 15 20 25		18		25			3
	16		15 20 25 30		22	+0.021 +0.008	29			
	20		20 25 30 35 40		28		40			
	25	+0.041 +0.020	20 25 30 35 40 50		33		45			
	30		20 25 30 35 40 50		38	+0.025 +0.009	50			5
	40	+0.050 +0.025	40 50 60 70		50		65			
	50		50 60 70 80		62	+0.030 +0.011	75			
型号			L		Dm6		H		T	
代码	dE7									
OFX72	5	+0.032 +0.020	10 12 15		9	+0.028 +0.019	14			
	6		10 12 15 20		10		16			2
	8	+0.040 +0.025	10 12 15 20		12	+0.034 +0.023	20			
	10		10 12 15 20 25		14		22			
	12	+0.050 +0.032	10 12 15 20 25		18		25			3
	16		12 15 20 25		22	+0.041 +0.028	29			
	20		15 20 25		30		40			
	25	+0.061 +0.040	15 20 25 30 40 50		35		45			
	30		20 25 30 40 50		40	+0.050 +0.034	50			5
	40	+0.075 +0.050	20 25 30 40 50		50		65			
	50		30 40 50		60	+0.060 +0.041	75			



请按图示订货

型号		
代码	dF7	L
OFX71	5	8 10 12 15
6		8 10 12 15 20

OFX71—d5—L12



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

14