


圆弧齿同步带

S2M/S3M/S5M/S8M型 经济型/精密型


代码	类型	齿距	材质		颜色	使用温度
			主体	芯线		
ECP01	经济型	2.0	氯丁橡胶			-30~80°C
J-ECP01	精密型					
J-ECP02	精密型					
ECP11	经济型	3.0	氯丁橡胶	玻璃纤维线	黑色	-30~80°C
J-ECP11	精密型					
J-ECP12	精密型					
ECP21	经济型	5.0	氯丁橡胶			-30~80°C
J-ECP21	精密型					
ECP31	经济型					
J-ECP31	精密型	8.0				

代码	齿形	齿距	L	h	H	V	Ra	PLD	单位重量(kg/10mm×m)
ECP01/J-ECP01	S2M	2	1.3	0.76	1.36	0.6	1.3	0.254	0.013
J-ECP02									
ECP11/J-ECP11	S3M	3	1.95	1.14	1.94	0.8	1.95	0.381	0.019
J-ECP12									
ECP21/J-ECP21	S5M	5	3.25	1.91	3.4	1.1	5	3.25	0.480
ECP31/J-ECP31	S8M	8	5.2	3.05	5.3	2.25	5.2	0.686	0.052



皮带宽度公差	
皮带宽度(mm)	公差
3~30	±0.5

- 为减少橡胶屑飞散，精密型橡胶同步带部分齿形齿面布为茶棕色，对强度及使用性能无影响；
- 橡胶同步带芯线采用螺旋缠绕的方式排布，分切后会看到芯线层，不影响使用；
- 表格中所有型号号的皮带周长为芯线长度；
- 重量为理论值，与实物可能存在差异，仅供参考；
- 精密型橡胶同步带表面具有一定的导电功能，经济型橡胶同步带和聚氨酯同步带无此功能；
- 如需要经济型防静电同步带，请联系我司产品部门。

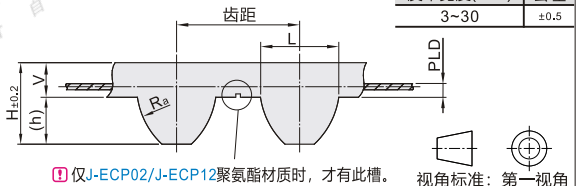

经济型 ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
经济型 ECP01-S2M	40 (4mm)	88	44
		90	45
		94	47
		96	48
		98	49
		100	50
		102	51
		104	52
		106	53
		108	54
		110	55
		112	56
		114	57
		116	58
		118	59
		120	60
		122	61
		124	62
		126	63
		128	64
130	65		
132	66		
134	67		
136	68		
140	70		
142	71		
144	72		
146	73		
148	74		
150	75		
152	76		
156	78		
158	79		
160	80		
164	82		
166	83		
168	84		
172	86		
176	88		
178	89		
180	90		
经济型 ECP01-S2M	60 (6mm)	182	91
		184	92
		186	93
		190	95
		192	96
		194	97
		196	98
		198	99
		200	100
		204	102
		206	103
		208	104
		210	105
		212	106
		214	107
		218	109
		220	110
		224	112
		226	113
		228	114
230	115		
234	117		
236	118		
240	120		
244	122		
246	123		
248	124		
250	125		
252	126		
254	127		
256	128		
260	130		
262	131		
264	132		
266	133		
268	134		
270	135		
274	137		
276	138		
278	139		
280	140		
284	142		
286	143		
288	144		

精密型 J-ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
精密型 J-ECP01-S2M	40 (4mm)	290	145
		292	146
		296	148
		298	149
		300	150
		302	151
		306	153
		308	154
		310	155
		312	156
		314	157
		316	158
		318	159
		320	160
		322	161
		324	162
		328	164
		330	165
		334	167
		336	168
340	170		
344	172		
348	174		
352	176		
354	177		
356	178		
360	180		
364	182		
366	183		
370	185		
376	188		
380	190		
386	193		
390	195		
392	196		
396	198		
400	200		
410	205		
416	208		
420	210		
426	213		
430	215		
436	218		
438	219		
440	220		
442	221		
444	222		
448	224		
452	226		
456	228		
460	230		
464	232		
468	234		
478	239		
480	240		
486	243		
492	246		
494	247		
498	249		
500	250		
502	251		
504	252		
508	254		
518	259		
520	260		
522	261		
530	265		
556	278		
560	280		
570	285		
572	286		
578	289		
580	290		
586	293		
594	297		
600	300		
604	302		
606	303		
610	305		
630	315		
638	319		
648	324		
650	325		
656	328		
688	344		
710	355		
726	363		

经济型 ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
经济型 ECP01-S2M	40 (4mm)	754	377
		800	400
		810	405
		836	418
		848	424
		860	430
		896	448
		900	450
		984	492
		996	498
		998	499
		1002	501
		1004	502
		1016	508
		1036	518
		1224	612
		1424	712
		1432	716
		1624	812
		1632	816
1824	912		
2024	1012		
2148	1074		
3000	1500		
3076	1538		
3672	1836		
3828	1914		
精密型 J-ECP01-S2M	40 (4mm)	66	33
		72	36
		74	37
		76	38
		78	39
		80	40
		82	41
		84	42
		86	43
		88	44
		90	45
		92	46
		94	47
		96	48
		98	49
		100	50
		102	51
		104	52
		106	53
		110	55
112	56		
114	57		
116	58		
118	59		
120	60		
122	61		
124	62		
126	63		
128	64		
130	65		
132	66		
134	67		
136	68		
140	70		
142	71		
144	72		
146	73		
148	74		
150	75		
152	76		
156	78		
158	79		
160	80		
164	82		
166	83		
168	84		
170	85		
172	86		
174	87		
176	88		
178	89		
180	90		

精密型 J-ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
精密型 J-ECP01-S2M	40 (4mm)	182	91
		184	92
		186	93
		190	95
		192	96
		194	97
		196	98
		198	99
		200	100
		202	101
		204	102
		206	103
		208	104
		210	105
		212	106
		214	107
		216	108
		218	109
		220	110
		224	112
226	113		
230	115		
232	116		
234	117		
236	118		
238	119		
240	120		
244	122		
246	123		
248	124		
250	125		
252	126		
254	127		
256	128		
258	129		
260	130		
262	131		
264	132		
266	133		
268	134		
270	135		
272	136		
274	137		
276	138		
278	139		
280	140		
284	142		
286	143		
288	144		
290	145		
292	146		
296	148		
298	149		
302	151		
304	152		
306	153		
308	154		
310	155		
312	156		
314	157		
316	158		
318	159		
320	160		
322	161		
324	162		
326	163		
328	164		
330	165		
334	167		
338	169		
340	170		
342	171		
344	172		
346	173		
348	174		
350	175		
354	177		
360	180		
364	182		
370	185		
372	186		
374	187		
376	188		
380	190		
386	193		

精密型 J-ECP01-S2M (齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
精密型 J-ECP01-S2M	40 (4mm)	390	195
		396	198
		400	200
		402	201
		408	204
		410	205
		426	213
		430	215
		434	217
		436	218
		438	219
		440	220
		442	221
		444	222
		448	224
		452	226
		456	228
		460	230
		464	232
		468	234
474	237		
476	238		
480	240		
486	243		
494	247		
500	250		
520	260		
524	262		
530	265		
550	275		
560	280		
572	286		
580	290		
586	293		
594	297		
600	300		
604	302		
630	315		
638	319		
640	320		
648	324		
656	328		
660	330		
672	336		
676	338		
694	347		
710	355		
726	363		
740	370		
752	376		
778	389		
796	398		
800	400		
810	405		
822	411		
826	413		
848	424		
856	428		
862	431		
866	433		
880	440		
882	441		
898	449		
900	450		
910	455		
930	465		
944	472		
976	488		
984	492		
1016	508		
1062	531		
1066	533		
1100	550		
1136	568		
1140	570		
1148	574		
1196	598		
1224	612		
1250	625		
1274	637		
1290	645		
1330	665		
1420	710		
1524	762		
1878	939		

◎ J-ECP02-S2M(齿距: 2)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		80	40
		90	45
		98	49
		100	50
		112	56
		114	57
		118	59
		120	60
		122	61
		126	63
		130	65
		138	69
		140	70
		144	72
		152	76
		158	79
		160	80
		164	82
		166	83
		172	86
		190	95
		194	97
		200	100
		210	105
		212	106
		218	109
		220	110
		224	112
		230	115
		236	118
		240	120
		244	122
		246	123
		250	125
		260	130
		280	140
		290	145
		320	160
		330	165
		360	180
		370	185
		396	198
		436	218
		448	224
		480	240
		488	244
		520	260
		560	280
		572	286
		580	290
		630	315
		984	492
		1062	531
		1196	598
		1250	625

◎ ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		87	29
		102	34
		111	37
		120	40
		123	41
		126	42
		129	43
		132	44
		135	45
		138	46
		141	47
		144	48
		147	49
		150	50
		153	51
		156	52
		159	53
		162	54
		165	55
		168	56
		171	57
		174	58
		177	59
		180	60
		183	61
		186	62
		189	63
		192	64
		195	65
		198	66
		201	67
		204	68
		207	69
		210	70
		213	71
		216	72
		219	73
		222	74
		225	75
		228	76
		231	77
		234	78
		237	79

◎ ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		240	80
		243	81
		246	82
		249	83
		252	84
		255	85
		258	86
		261	87
		264	88
		267	89
		270	90
		273	91
		276	92
		279	93
		282	94
		285	95
		288	96
		291	97
		294	98
		297	99
		300	100
		303	101
		306	102
		309	103
		312	104
		315	105
		318	106
		321	107
		324	108
		327	109
		330	110
		333	111
		336	112
		339	113
		342	114
		345	115
		348	116
		351	117
		354	118
		357	119
		360	120
		363	121
		366	122
		369	123
		372	124
		375	125
		378	126
		381	127
		384	128
		387	129
		390	130
		393	131
		396	132
		399	133
		402	134
		405	135
		408	136
		411	137
		414	138
		417	139
		420	140
		423	141
		426	142
		429	143
		432	144
		435	145
		438	146
		441	147
		444	148
		447	149
		450	150
		453	151
		456	152
		459	153
		462	154
		465	155
		468	156
		471	157
		474	158
		477	159
		480	160
		483	161
		486	162
		489	163
		492	164
		495	165
		498	166
		501	167
		504	168
		507	169
		510	170
		513	171
		516	172
		519	173
		522	174
		525	175
		528	176
		531	177
		534	178
		537	179
		540	180
		543	181
		546	182
		549	183
		552	184
		555	185
		558	186
		561	187
		564	188

◎ ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		567	189
		570	190
		573	191
		576	192
		579	193
		582	194
		585	195
		588	196
		591	197
		594	198
		597	199
		600	200
		603	201
		606	202
		609	203
		612	204
		621	207
		630	210
		633	211
		636	212
		639	213
		642	214
		645	215
		648	216
		651	217
		654	218
		657	219
		660	220
		663	221
		666	222
		675	225
		681	227
		690	230
		693	231
		696	232
		699	233
		708	236
		711	237
		714	238
		720	240
		726	242
		741	247
		750	250
		753	251
		756	252
		765	255
		768	256
		780	260
		783	261
		789	263
		801	267
		804	268
		810	270
		819	273
		825	275
		840	280
		852	284
		858	286
		879	293
		882	294
		888	296
		900	300
		909	303
		918	306
		924	308
		927	309
		936	312
		948	316
		954	318
		960	320
		966	322
		972	324
		999	333
		1005	335
		1014	338
		1050	350
		1056	352
		1062	354
		1080	360
		1110	370
		1119	373
		1146	382
		1170	390
		1188	396
		1203	401
		1245	415
		1260	420
		1263	421
		1290	430
		1401	467
		1422	474
		1461	487
		1500	500
		1596	532
		1611	537
		1680	560
		1788	596
		1800	600
		1884	628
		2025	675
		2100	700
		3210	1070
		3324	1108
		4020	1340
		498	166
		501	167

◎ J-ECP11-S3M(齿距: 3)

型号		皮带 周长	齿数
代码	皮带公称宽度		
		96	32
		102	34
		114	38
		120	40
		123	41
		129	43
		132	44
		135	45
		141	47
		144	48
		147	49
		150	50
		156	52
		159	53
		162	54
		168	56
		171	57
		174	58
		177	59
		180	60
		186	62
		189	63
		192	64
		195	65
		198	66
		201	67
		204	68
		207	69
		210	70
		213	71
		216	72
		219	73
		222	74
		225	75
		228	76
		231	77
		234	78
		237	79
		246	82
		252	84
		255	85
		258	86
		261	87
		264	88
		267	89
		270	90
		273	91
		276	92
		279	93
		282	94
		285	95
		288	96
		291	97
		300	100
		303	101
		306	102
		309	103
		312	104
		315	105
		318	106
		324	108
		327	109
		330	110
		333	111
		336	112
		339	113
		345	115
		348	116
		351	117
		354	118
		357	119
		360	120
		363	121
		366	122
		369	123
		372	124
		375	125
		378	126
		384	128
		387	129
		390	130
		393	131
		396	132
		399	133
		402	134

圆弧齿同步带

S2M/S3M/S5M/S8M型 经济型/精密型

◎ J-ECP12-S3M(齿距: 3)

型号		皮带公称宽度	皮带周长	齿数
代码	皮带公称宽度			
		141	47	
		144	48	
		162	54	
		174	58	
		177	59	
		180	60	
		186	62	
		189	63	
		192	64	
		195	65	
		201	67	
		210	70	
		213	71	
		219	73	
		225	75	
		246	82	
		249	83	
		252	84	
		255	85	
		264	88	
		276	92	
		288	96	
		300	100	
		312	104	
		318	106	
		327	109	
		345	115	
		360	120	
		363	121	
		369	123	
		375	125	
		378	126	
		387	129	
		396	132	
		402	134	
		405	135	
		408	136	
		420	140	
		432	144	
		453	151	
		459	153	
		474	158	
		483	161	
		501	167	
		519	173	
		537	179	
		540	180	
		564	188	
		59	197	
		600	200	
		633	211	
		645	215	
		681	227	
		741	247	

◎ ECP21-S5M(齿距: 5)

型号		皮带公称宽度	皮带周长	齿数
代码	皮带公称宽度			
		150	30	
		160	32	
		180	36	
		185	37	
		200	40	
		220	44	
		225	45	
		230	46	
		235	47	
		240	48	
		245	49	
		250	50	
		255	51	
		260	52	
		265	53	
		270	54	
		275	55	
		280	56	
		285	57	
		290	58	
		295	59	
		300	60	
		305	61	
		310	62	
		315	63	
		320	64	
		325	65	
		330	66	
		335	67	
		340	68	
		345	69	
		350	70	
		355	71	
		360	72	
		365	73	
		370	74	
		375	75	
		380	76	
		385	77	
		390	78	
		395	79	
		400	80	
		405	81	
		410	82	
		415	83	
		420	84	
		425	85	
		430	86	
		435	87	
		440	88	

◎ ECP21-S5M(齿距: 5)

型号		皮带公称宽度	皮带周长	齿数
代码	皮带公称宽度			
		445	89	
		450	90	
		455	91	
		460	92	
		465	93	
		470	94	
		475	95	
		480	96	
		485	97	
		490	98	
		495	99	
		500	100	
		505	101	
		510	102	
		515	103	
		520	104	
		525	105	
		530	106	
		535	107	
		540	108	
		545	109	
		550	110	
		555	111	
		560	112	
		565	113	
		570	114	
		575	115	
		580	116	
		585	117	
		590	118	
		595	119	
		600	120	
		605	121	
		610	122	
		615	123	
		620	124	
		625	125	
		630	126	
		635	127	
		640	128	
		645	129	
		650	130	
		655	131	
		660	132	
		665	133	
		670	134	
		675	135	
		680	136	
		685	137	
		690	138	
		695	139	
		700	140	
		705	141	
		710	142	
		715	143	
		720	144	
		725	145	
		730	146	
		735	147	
		740	148	
		745	149	
		750	150	
		755	151	
		760	152	
		765	153	
		770	154	
		775	155	
		780	156	
		785	157	
		790	158	
		795	159	
		800	160	
		805	161	
		810	162	
		815	163	
		820	164	
		825	165	
		830	166	
		835	167	
		840	168	
		845	169	
		850	170	
		860	172	
		865	173	
		870	174	
		875	175	
		880	176	
		885	177	
		890	178	
		895	179	
		900	180	
		905	181	
		910	182	
		915	183	
		920	184	
		925	185	
		930	186	
		935	187	
		940	188	
		945	189	
		950	190	
		955	191	
		960	192	
		970	194	
		975	195	
		980	196	
		985	197	
		990	198	
		1000	200	
		1010	202	

◎ ECP21-S5M(齿距: 5)

型号		皮带公称宽度	皮带周长	齿数
代码	皮带公称宽度			
		1025	205	
		1050	210	
		1060	212	
		1080	216	
		1085	217	
		1100	220	
		1110	222	
		1115	223	
		1120	224	
		1125	225	
		1135	227	
		1145	229	
		1150	230	
		1160	232	
		1165	233	
		1175	235	
		1180	236	
		1195	239	
		1200	240	
		1210	242	
		1215	243	
		1225	245	
		1250	250	
		1270	254	
		1295	259	
		1300	260	
		1305	261	
		1310	262	
		1320	264	
		1330	266	
		1335	267	
		1350	270	
		1380	276	
		1390	278	
		1400	280	
		1450	290	
		1460	292	
		1475	295	
		1500	300	
		1510	302	
		1530	306	
		1550	310	
		1595	319	
		1600	320	
		1615	323	
		1650	330	
		1675	335	
		1685	337	
		1690	338	
		1695	339	
		1700	340	
		1715	343	
		1765	353	
		1800	360	
		1945	389	
		1960	392	
		2000	400	
		2100	420	
		2350	470	
		2400	480	
		2450	490	
		2480	496	
		2525	505	
		2765	553	
		2800	560	
		2980	596	
		3090	618	
		3800	760	
		4000	800	

◎ J-ECP21-S5M(齿距: 5)

型号		皮带公称宽度	皮带周长	齿数
代码	皮带公称宽度			
		225	45	
		230	46	
		255	51	
		260	52	
		295	59	
		300	60	
		305	61	
		320	64	
		325	65	
		340	68	
		350	70	
		360	72	
		370	74	
		375	75	
		380	76	
		390	78	
		395	79	
		400	80	
		415	83	
		425	85	
		435	87	
		440	88	
		450	90	
		475	95	
		490	98	
		500	100	
		520	104	
		525	105	
		530	106	
		545	109	
		550	110	
		560	112	
		575	115	

◎ J-ECP21-S5M(齿距: 5)

型号		皮带公称宽度	皮带周长	齿数
代码	皮带公称宽度			
		590	118	
		595	119	
		600	120	
		615	123	
		625	125	
		640	128	
		650	130	
		665	133	
		670	134	
		675	135	
		690	138	
		695	139	
		700	140	
		710	142	
		720	144	
		725	145	
		730	146	
		740	148	
		750	150	
		765	153	
		780	156	
		800	160	
		810	162	
		830	166	
</				

经济型 ECP31-S8M(齿距: 8)

型号	皮带公称长度	皮带周长	齿数
1512	1512	189	
1520	1520	190	
1528	1528	191	
1536	1536	192	
1544	1544	193	
1552	1552	194	
1560	1560	195	
1568	1568	196	
1576	1576	197	
1584	1584	198	
1592	1592	199	
1600	1600	200	
1608	1608	201	
1624	1624	203	
1632	1632	204	
1640	1640	205	
1648	1648	206	
1672	1672	209	
1680	1680	210	
1688	1688	211	
1696	1696	212	
1728	1728	216	
1760	1760	220	
1776	1776	222	
1792	1792	224	
1800	1800	225	
1816	1816	227	
1824	1824	228	
1832	1832	229	
1840	1840	230	
1856	1856	232	
1880	1880	235	
1896	1896	237	
1904	1904	238	
1912	1912	239	
1920	1920	240	
1928	1928	241	
1936	1936	242	
1952	1952	244	
1960	1960	245	
2000	2000	250	
2016	2016	252	150
2032	2032	254	(15mm)
2040	2040	255	
2048	2048	256	
2056	2056	257	
2080	2080	260	250
2096	2096	262	(25mm)
2104	2104	263	
2120	2120	265	
2136	2136	267	
2160	2160	270	300
2200	2200	275	(30mm)
2240	2240	280	
2256	2256	282	
2272	2272	284	
2288	2288	286	
2296	2296	287	
2304	2304	288	400
2320	2320	290	(40mm)
2400	2400	300	
2432	2432	304	
2448	2448	306	
2464	2464	308	
2496	2496	312	
2504	2504	313	
2520	2520	315	
2536	2536	317	
2560	2560	320	
2600	2600	325	
2624	2624	328	
2640	2640	330	
2680	2680	335	
2704	2704	338	
2736	2736	342	
2760	2760	345	
2800	2800	350	
2848	2848	356	
2880	2880	360	
2904	2904	363	
2920	2920	365	
2944	2944	368	
3000	3000	375	
3048	3048	381	
3120	3120	390	
3200	3200	400	
3264	3264	408	
3280	3280	410	
3304	3304	413	
3400	3400	425	
3440	3440	430	
3600	3600	450	
3680	3680	460	
3720	3720	465	
3800	3800	475	
4000	4000	500	
4104	4104	513	
4200	4200	525	
4400	4400	550	
5280	5280	660	

精密型 J-ECP31-S8M(齿距: 8)

型号	皮带公称长度	皮带周长	齿数
376	376	47	
400	400	50	
408	408	51	
440	440	55	
480	480	60	
496	496	62	
512	512	64	
520	520	65	
528	528	66	
560	560	70	
584	584	73	
600	600	75	
632	632	79	
640	640	80	
656	656	82	
680	680	85	
712	712	89	
720	720	90	
760	760	95	
800	800	100	
824	824	103	
840	840	105	
848	848	106	
856	856	107	
880	880	110	
896	896	112	
912	912	114	
920	920	115	
928	928	116	
944	944	118	
952	952	119	
960	960	120	
976	976	122	
984	984	123	
1000	1000	125	
1024	1024	128	
1040	1040	130	
1056	1056	132	
1080	1080	135	
1096	1096	137	
1120	1120	140	
1128	1128	141	
1136	1136	142	
1152	1152	144	
1160	1160	145	
1184	1184	148	
1200	1200	150	150
1216	1216	152	(15mm)
1224	1224	153	
1240	1240	155	
1248	1248	156	
1256	1256	157	
1280	1280	160	250
1296	1296	162	(25mm)
1304	1304	163	
1312	1312	164	
1320	1320	165	
1344	1344	168	
1352	1352	169	
1360	1360	170	300
1368	1368	171	(30mm)
1384	1384	173	
1400	1400	175	
1424	1424	178	
1440	1440	180	
1480	1480	185	
1488	1488	186	
1520	1520	190	
1552	1552	194	
1600	1600	200	
1640	1640	205	
1648	1648	206	
1680	1680	210	
1696	1696	212	
1728	1728	216	
1760	1760	220	
1776	1776	222	
1792	1792	224	
1800	1800	225	
1816	1816	227	
1832	1832	229	
1880	1880	235	
1912	1912	239	
1960	1960	245	
2000	2000	250	
2040	2040	255	
2048	2048	256	
2064	2064	258	
2104	2104	263	
2120	2120	265	
2160	2160	270	
2240	2240	280	
2272	2272	284	
2304	2304	288	
2400	2400	300	
2496	2496	312	
2600	2600	325	
2800	2800	350	
2920	2920	365	
2944	2944	368	
3048	3048	381	
3200	3200	400	
3248	3248	406	
3272	3272	409	
3440	3440	430	
3680	3680	460	
4400	4400	550	

精密型 ECP01-S2M(齿距: 2)

型号	皮带公称长度	皮带周长	齿数
100	100	50	
102	102	51	
104	104	52	
ECP01-S2M-60-102			



请按图示订货



未税价(元)



交货期
3

精密型

优惠价

数量 1~4 5~
价格 100% 另行报价



交货期
5

经济型

