


直流型电动滚筒

带锥套型 双链轮型

代码	类型	安装方式	材质			表面处理	
			筒体	锥套	芯轴	筒体	芯轴
QCW01	双链轮型	带锥套型	内螺型	低碳钢	PVC	碳钢	镀锌
QCW02				不锈钢			镀锌

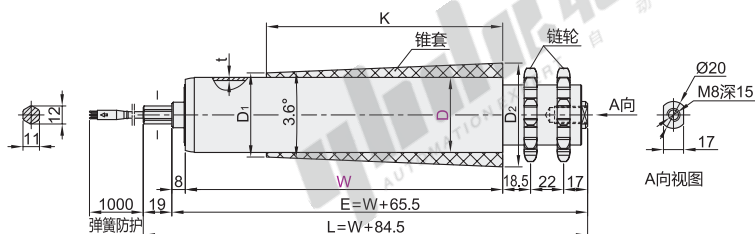


锥套尺寸表


W	K	D ₁	D ₂
260~310	250	53.1	59.1
311~360	300	56	74.4
361~410	350	53.1	
411~460	400	56	80.8
461~510	450	53.1	
511~560	500	56	87.1
561~610	550	53.1	
611~660	600	56	93.7
661~710	650	53.1	
711~760	700	56	100
761~810	750	53.1	
811~860	800	56	106.3
861~910	850	53.1	
911~960	900	56	112.6
961~1010	950	53.1	
1011~1060	1000	56	118.3
1061~1110	1050	53.1	
1111~1160	1100	56	124.7
1161~1200	1150	53.1	

电缆端安装支架

1(标准型)



2(紧凑型)



视角标准：第一视角

型号		W	D	电缆端 安装支架	t	E	L	链轮型号
代码	速度代码	最小单位1						
QCW01	8 13 16 20 25 31 39 50	260~1200	50	1(标准型) 2(紧凑型)	1.5	W+65.5	W+84.5	08B14T



请按图示订货

代码	速度代码	W	D	电缆端 安装支架
QCW01	8 13 16 20	260~1200	50	1
QCW02				2

QCW01—16—W500—D50—1



未税价(元)

优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

13