




代码	类型	材质			防水等级	
		外壳	绝缘体	接触体		
ZIX15	面板安装型	前锁母插座	铜(镀镍)	PA	铜(镀金)	IP67
ZIX16		前锁公插座				
ZIX17		后锁母插座				
ZIX18		后锁公插座				


前锁母插座 ZIX15

规格: M8

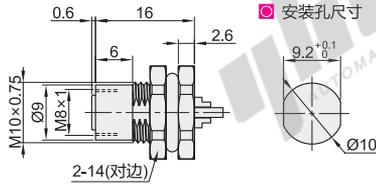


安装孔尺寸

规格: M12




安装孔尺寸




前锁公插座 ZIX16

规格: M8

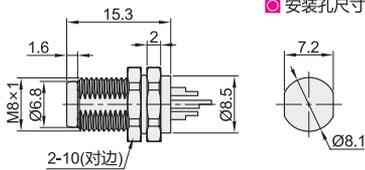


安装孔尺寸

规格: M12




安装孔尺寸




后锁母插座 ZIX17

规格: M8

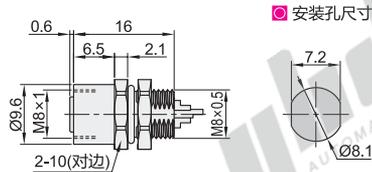


安装孔尺寸

规格: M12




安装孔尺寸




后锁公插座 ZIX18

规格: M8

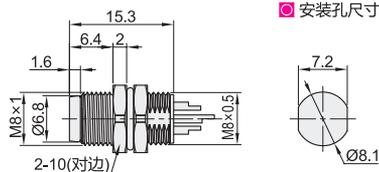


安装孔尺寸

规格: M12



安装孔尺寸



视角标准: 第一视角

代码	型号	规格	芯数	接线方式	适用电线规格		额定电流(A)	电压(V)
					线径(mm <sup>2</sup> )	AWG线径		
前锁母插座 ZIX15	M8	焊接	3	250	0.25/0.5	≤24	4	60
			4					
			5B					
			6					
			8					
			2					
			2B					
			2D					
前锁公插座 ZIX16	M12	焊接	3	250	0.25/0.5	24/20	4	60
			3B					
			3D					
			4					
后锁母插座 ZIX17	M8	焊接	4	125	0.14/0.34	26/22	2	60
			4B					
			4D					
			5					
			5B					
			5D					
			8					
			12					

技术参数

过电压等级	II
插芯电阻	≤10mΩ
绝缘电阻	>100MΩ
防护等级(插合时)	IP67
温度范围	-40°C~+85°C



请按图示订货

型号		芯数
代码	规格	
ZIX15	M8	3
ZIX16	M12	2B

ZIX15 - M12 - 2

■ M8绝缘体正面图



■ M12绝缘体正面图

