
带挡圈槽型/两端内螺纹型

一端内螺纹一端外螺纹型


重载型



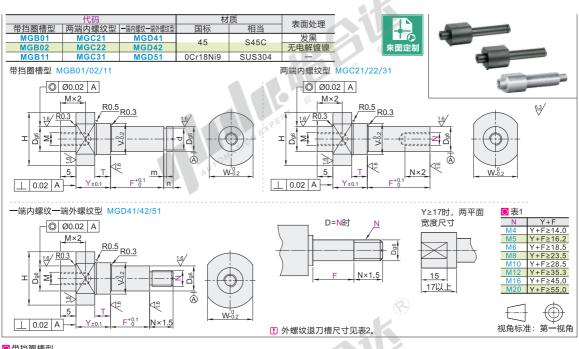

型뒥		П	g6	最小	単位1	т.	М	1/	н	w		1	m	n	
代码	规格		-	Υ	F		IVI	V	П	VV		1	4	,,,,	
	6	6	-0.004 -0.012			1 3 5	М3	8	14	12	5	+0.075	0.7	2	ø
	8	8	-0.005		5~80	1 3 3	M4	10	17	14	7	+0.09	0.9	3	
	10	10	-0.014	4~65			M6	13	21	18	9.6	-0.09		3	
MGB01	12	12						15	24	21	11.5	M	1.15	(g))	
MGB02	15	15	-0.006 -0.017					18	28	25	14.3	-0.11	1.15	4	
MGB11	17	17			10~110	2 5 8	M8	20	32	28	16.2	1	2		
	20	20		1	10~110		IVIO	24	36	32	19	1	1.35		
	25	25	-0.007 -0.020	4~80				29	43	38	23.9	-0.21	1.33	5	
	30	30						34	50	44	28.6		1.65		





○ 可选加工

型号		Dg6	最小.	単位1	-	可选加工代码		
代码	规格	Dge	Υ	F		可远加工10時		
MGB01	6	6	-6	W-00	1025	€ D ME		
MGB02	8	8			9	UNIE		

MGB01-6-Y10-F15-T3-PD



悬铰 臂链 销销

Α5

型号 代码 规格		D _{g6}		最小单位1 Y F		T	UTN	М	٧	Н	W
-	6	6	-0.004 -0.012			1 3 5	3	М3	8	14	12
	8	8	-0.005		5~80	1 3 3	4	M4	10	17	14
	10	10	-0.014				4 5 6	M6	13	21	18
MGC21	12	12					5 6 8		15	24	21
MGC22	15	15	-0.006	4~00					18	28	25
MGC31	17	17			10~110	2 5 8	6 8 10	M8	20	32	28
III COOT	20	20			10~110			IVIO	24	36	32
	25	25	-0.007				8 10 12		29	43	38
	30	30					8 10 12 16		34	50	44



🦷 🔘 可选加工

5	型 ^된	글	Dg6	最小单位1		T N		可选加工代码		
3	代码	规格	Dgo	Υ	F	1	IN	中地加工10月		
_	MGC21	6	6	1.00	5~80	1(3)5	3	6		
_	MGC22	8	8	4-05	3200	100	4			
3	MGC21-6-Y10-F15-T3-N3-PD									
1	MGCZI	-0-	110-	Y10-F15-13-N3-PD						

◎ 一端内螺纹一端外螺纹型


型号 代码 规格				最小单位1 T		Т	N	М	٧	Н	W
	6	6	-0.004 -0.012			1 3 5	4 5 6	М3	8	14	12
	8	8	-0.005		5~80	1 3 3	5 6 8	M4	10	17	14
	10	10	-0.014				6 8 10	M6	13	21	18
MGD41	12	12					6 8 10 12		15	24	21
MGD42	15	15	-0.006	4~65			0 0 10 12		18	28	25
MGD51	17	17			10~110	2 5 8	8 10 12 16	М8	20	32	28
	20	20			10~110			IVIO	24	36	32
	25	25	-0.007				10 12 16 20		29	43	38
	30	30	1						34	50	44

			3	D-c	最小.	单位1	-
		代码	规格	Dge	Y	F	'
	Ø₽.	MGD41	6	6	00	P 000	100E

请按图示订货 MGD41—6—Y10—F15—T3—N4

〇 可选加工

ı	型号 代码 规格		Dg6	最小	单位1 F	Т	N	可选加工代码
N	MGD41	6	6	4~65	5~80	1(3)5	4)5 6	eD.
	MGD42	8	8 V10	E15	To	NIA	5 6 8	





	<u>r</u>
\longrightarrow	
	g
	-
WH 2	二 4田 4子

粗牙螺纹										
螺纹直径(N)	g	r	f							
4	1.2~1.5	0.2~0.3	2.9~3.2							
5	1.2-1.5	0.2-0.3	3.9~4.1							
6			4.3~4.9							
8	1.5~2.5	0.2~0.6	6.3~6.6							
10			8.1~8.3							
12	1.5~3.0		9.8~10.1							
16	1.5~3.0	0.2~1.0	13.6~13.8							
20	1.5~4.0		17.0~17.2							



附带挡圈

代码

ME



选型方法 ME ① 规格6~8:E形挡圈;

规格10~30:C形挡圈。 ① 仅适用带挡圈槽型。





N

① 无表面处理

