




代码	类型	材质				表面处理			使用气体	使用温度
		气缸	活塞杆	衬套	前端部	气缸	活塞杆	前端部		
FHJ41	标准型	STKM11A	S20C	聚脲脲(白色)	Q235	烤漆(黑色亚光)	镀硬铬	烤漆(黑色亚光)	N ₂	-20°C~60°C
E-FHJ41	经济型									

① 规格15049的使用温度为0~60°C。


氮气弹簧公差标准		氮气弹簧公差标准	
力值(N)	公差范围	力值(N)	公差范围
≤100	-5/+15	601~800	-25/+50
101~200	-10/+20	801~1000	-30/+60
201~400	-15/+30	1001~1200	-35/+70
401~600	-20/+40	>1200	-40/+80

规格: 15049~18200

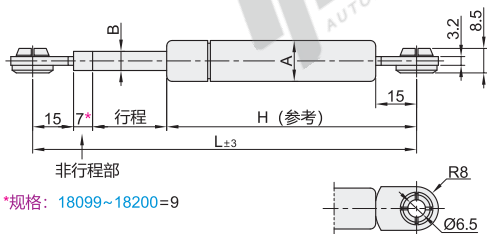

*规格: 18099~18200=9

规格: 22250~22360

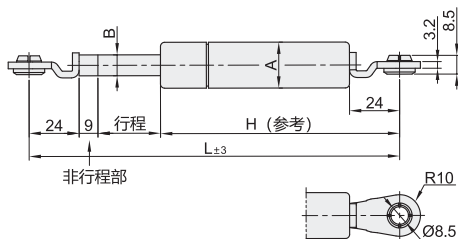

① 适用氮气弹簧支架详见P1190页。



型号	反作用力 Fa	最大长度 Lmax	最小长度 Lmin	行程 max	氮气弹簧反作用力(20°C)				A	B	H	适用安装 支架	重量 (g)	
					最大长度-10mm行程时		最大长度-(s)mm行程时							
					Fa	Fb	Fa	Fb						
FHJ41 E-FHJ41	030	181	132	49	N	kgf	N	kgf	39	15	6	110		81
	15049				30	3	40	4.1						
	055				55	6	71	7.2						
	070*				70	7.1	89	9						
	085*				85	9	109	11.1						
	150*				150	15	191	19.5						
	050*				50	5	67	6.8						
	080*				80	8	107	10.9						
	100				100	10.2	132	13.4						
	120				120	12	158	16.1						
	070*				70	7	94	9.6						
	085				85	8.7	115	11.7						
	100*	100	10	135	13.8									
	150*	150	15	202	20.6									
	200	200	20	268	27.3									
	075*	75	8	101	10.3									
	120*	120	12	162	16.5									
	200*	200	20	270	27.6									
	300*	300	30.5	392	39.9									
	400*	400	40.7	522	53.2									
	100*	100	10	123	13									
	200	200	20	245	25									
	300*	300	31	367	37									
	400*	400	41	489	50									
100*	100	10	126	12.9										
150*	150	15	188	19.2										
200*	200	20	251	25.6										
250*	250	26	313	31.9										
100*	100	10	127	13										
150*	150	15.2	193	19.6										
200*	200	20	257	26.2										
300*	300	31	384	39.2										
400	400	41	511	52.1										
345	345	35	528	53.9										
500	500	51	763	77.9										
700	700	71	1065	108.7										
745	745	76	1160	118.4										
845	845	86	1314	134.1										
200	200	20	257	26.2										
250	250	26	321	32.8										
300	300	31	385	39.3										
215	215	22	284	29										
345	345	35	456	46.5										
2250	200*	635	385	250	200	20	257	26.2	240	10	352		407	
2270	500	670	400	270	270	500	51	763	77.9	260		367	FHJ51-8A FHJ51-8B FHJ51-8C FHJ51-8D	529
2290	745	700	410	290	290	745	76	1160	118.4	280		377		554
22300	250	740	440	300	300	250	26	321	32.8	290		407		467
22360	215	833	473	360	360	215	22	284	29	350	10	440		521

① 经济型仅适用带*号规格。



代码	规格	反作用力 Fa
FHJ41	15049	030
E-FHJ41	15049	055



数量	1~4	5~
价格	100%	另行报价



交货期
6

请按图示订货 FHJ41—15049—030

未税价(元)