


绝缘定位销/弹性圆柱销

绝缘定位销

代码	类型	材质	
		主体	芯
BM Y01	绝缘定位销	环氧纤维	SUS304

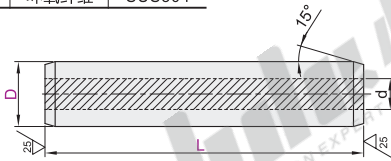

代码	型号		L	d
	D			
BM Y01	6		8 10 15 20 25 30 35 40	3
	8	+0.03 0	10 15 20 25 30 35 40	4
	9		15 20 25 30 35 40 45 50	5
	10		15 20 25 30 35 40 45 50	6
	12		20 25 30 35 40 45 50	



代码	型号	L
BM Y01	D6	8 10 15

BM Y01—D6—L10






优惠价		
数量	1~9	10~
价格	100%	另行报价



弹性圆柱销·带齿形槽型

代码	类型	材质	硬度
BL J01	带齿形槽型	SUS420	42~48HRC

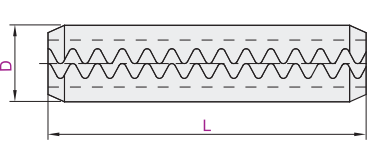

代码	型号		L	S
	D			
BL J01	2		5 6 8 10 12 14 16 18 20	0.4
	3	+0.25 +0.15	6 8 10 12 14 16 18 20 22 25 28 32	0.6
	4		8 10 12 14 16 18 20 22 25 28 32 36 40	0.8
	5	+0.40 +0.20	10 12 14 16 18 20 22 25 28 32 36 40 45 50	1.0
	6		12 14 16 18 20 22 25 28 32 36 40 45 50 56	1.2



代码	型号	L
BL J01	D4	8 10

BL J01—D4—L10



优惠价		
数量	1~49	50~
价格	100%	另行报价






弹性圆柱销·直杆型

代码	类型	材质	硬度	表面处理
BL J51	直杆型	弹簧钢	45~50HRC	发黑

L尺寸公差表

L	公差
5~10	+0.5 0
12~50	+1.0 0
55~100	+1.5 0



JIS B 2808

代码	型号		L	S
	D			
BL J51	1	max 1.2 min 1.1	5 10	0.2
	1.2	1.4 1.3	5 10	0.25
	1.4	1.6 1.5	5 10	0.28
	1.6	1.8 1.7	5 10	0.3
	2	2.25 2.15	5 10 15 16 18 20	0.4
	2.5	2.75 2.65	10 16 20	0.5
	3	3.25 3.15	10 16 20 25 30	0.6
	4	4.4 4.2	10 16 20 25 30 35 40	0.8
	5	5.4 5.2	10 12 15 16 20 25 30 35 40 45 50	1
	6	6.4 6.2	10 16 20 25 30 35 40 45 50 55 60	1.2
	8	8.6 8.3	16 20 25 30 35 40 45 50 55 60 70 75 80	1.6
	10	10.6 10.3	16 20 25 30 40 45 50 60 70 75 80 90 100	2



代码	型号	L
BL J51	D1	5 10

BL J51—D1—L5



优惠价		
数量	1~49	50~
价格	100%	另行报价

