


锁紧螺母

牙腹锁紧型·三/六槽 圆形


代码	类型	槽数	材质		热处理	表面处理
			国标	相当		
BKJ73	牙腹锁紧型	三/六槽	45	S45C	28~32HRC	发黑

特点：该产品锁紧铜与螺纹呈30°角设计，不承受作用于螺纹上的轴向负荷。当螺母锁紧时，螺纹面不会解除轴向负荷，螺母不会变形。等间距锁紧铜可以用来调整即将装到轴上其他部件的偏差。由于锁紧铜不会变形，螺母经多次拆装仍可以保持精密度。

本产品自带螺钉。

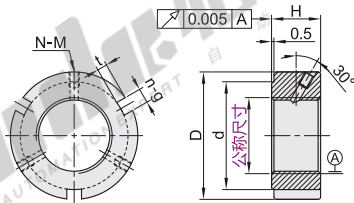

螺纹精度：ISO 4H
端面偏摆：0.005



视角标准：第一视角

型号	代码	公称尺寸	螺距	D	H	d	t	n-g	N-M	扭紧力矩 (NM)
BKJ73	M12	1.5		30	14	25		3-4		
	M14	1.0							3-M6	8
	M15	1.0								
	M16	1.5								
	M17	1.0				27		3-5		
	M18	1.5		32						
	M20	1.0			16	34	2	3-4	3-M5	4.5
	M22			38		33				
	M24									
	M25							3-5	3-M6	8
	M27			40		35				
	M30			45	18	41				
	M33			50		45				
	M35									
	M36	1.5		52		46				
	M39									
	M40			58		52				
	M42			62	20	56	2.5	3-6		
	M45			65		59				
	M48			70		64				
	M50									
	M52			73		66				
	M55	2.0								
	M56	1.5		75		68			3-M8	18
	M60	2.0			22		3	3-7		
	M64	1.5		80		73				
	M65									
	M68			85		78				
	M70	2.0		92		84				
	M72			94	24	86	3.5	3-8		
	M75									
	M76			98		90				

型号	代码	公称尺寸	螺距	D	H	d	t	n-g	N-M	扭紧力矩 (NM)
BKJ73	M80			105	24	98		3-8		
	M85			110		102				
	M90			120		108			3-M8	18
	M95			125	26	117				
	M100			130		118				
	M105			140		125		4	6-10	
	M110			145	28	132				
	M115	2.0		150		137				
	M120			155		142				
	M125			160	30	147				
	M130			165		152				
	M135			175		160		5	6-12	35
	M140			180		165			3-M10	
	M145			190	32	175				
	M150			195		180				
	M155			200						
	M160			210	34	190	6	6-14		
	M165									
	M170	3.0		220		200				
	M180			230	36	205				
	M190			240		215				
	M200			250		225		7	6-16	
	M210	4.0		260	38	245			3-M12	60
	M220	3.0		270		255				
	M240	4.0								
	M260	3.0		290		268	9			
	M270			310	40	288		10	6-20	
	M280			320		298			3-M14	100
	M300			330		308				
				360	42	336	11	6-24		



请按图示订货

型号	代码	公称尺寸	螺距	D
BKJ73	M12	1.5		30
	M14			

BKJ73—M12—1.5



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

5