


普通级/精密级 轻预压(FC):0~0.02C

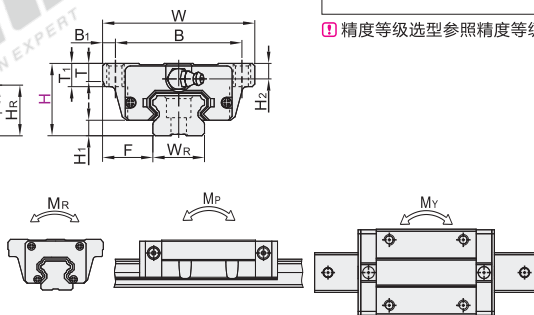

视角标准：第一视角

请按图示订货

型号			
代码	H	L	
IAV05	24	100~1480	
IAV06	28	100~1480	
	33	100~1960	

IAV05 — H28 — L260

	● 优惠价	
	数量	1~9 10~
	价格	100% 另行报价

交货期
3

H	N	E	H	N	E	H	N	E	H	N	E
	最小単位1 (安装枚数)			最小単位1 (安装枚数)			最小単位1 (安装枚数)			最小単位1 (安装枚数)	
24	100~131	2	28	1100~1159	19	42	344~423	5	48	200~255	3
	132~191	3		1160~1219	20		424~503	6		256~335	4
	192~251	4		1220~1279	21		504~583	7		336~415	5
	252~311	5		1280~1339	22		584~663	8		416~495	6
	312~371	6		1340~1399	23		664~743	9		496~575	7
	372~431	7		1400~1459	24		744~823	10		576~655	8
	432~491	8		1460~1480	25		824~903	11		656~735	9
	492~551	9		100~141	2		904~983	12		736~815	10
	552~611	10		142~201	3		984~1063	13		816~895	11
	612~671	11		202~261	4		1064~1143	14		896~975	12
	672~731	12		262~321	5		1144~1223	15		976~1055	13
	732~791	13		322~381	6		1224~1303	16		1056~1135	14
	792~851	14		382~441	7		1304~1383	17		1136~1215	15
	852~911	15		442~501	8		1384~1463	18		1216~1295	16
	912~971	16		502~561	9		1464~1543	19		1296~1375	17
	972~1031	17		562~621	10		1544~1623	20		1376~1455	18
	1032~1091	18		622~681	11		1624~1703	21		1456~1535	19
	1092~1151	19		682~741	12		1704~1783	22		1536~1615	20
	1152~1211	20		742~801	13		1784~1863	23		1616~1695	21
	1212~1271	21		802~861	14		1864~1943	24		1696~1775	22
	1272~1331	22		862~921	15		1944~1960	25		1776~1855	23
	1332~1391	23		922~981	16					1856~1935	24
	1392~1451	24		982~1041	17					1936~1960	25

Technical drawing of a mechanical part showing dimensions H , C , D , F , WR , and a section line $A-A$.

尺寸精度		普通级					精密级				
		24	28	33	42	48	24	28	33	42	48
单滑块	高度H的容许尺寸误差 宽度F的容许尺寸误差	±0.1					±0.03				
双滑块	高度H的相互误差	0.02					0.01				
	宽度F的相互误差(基准制)	0.03					0.015				
滑块C面对滑块A面的行走平行度		请参阅行走精度表P1374									
滑块D面对滑块B面的行走平行度		请参阅行走精度表P1374									