


微型带凸缘深沟球轴承

双面带防尘盖式 标准型

代码	类型	轴承类型 代码	轴承精度	后置代码	轴承材质	
					国标	相当
BAL	标准型	6	GB/T 307.1 6级	ZZ(双面带防尘盖)	GCr15	SUJ2
BAL...-SUS					9Cr18Mo	SUS440C

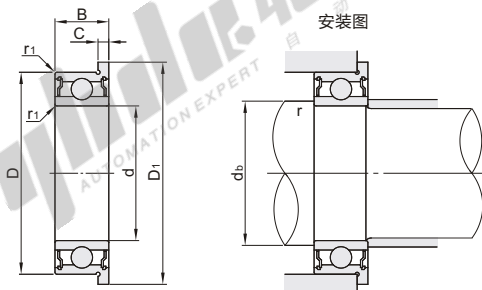

① 不承诺品牌。
② 基本额定负载/容许转速/重量数值不适用于SUS440C材质。

视图标准：第一视角

代码	型号 轴承型号	d	D	B	D ₁	C	r ₁ (min)	基本额定负载		容许转速 rpm (参考)	安装尺寸		重量 (g) (参考)
								Cr(动)	Cor(静)		d _b (min)	r (max)	
BAL BAL...-SUS	682ZZ	2	5	2.3	6.1	0.6	0.08	169	50	85000	2.7	0.08	0.24
	692ZZ		6	3	7.5	0.8	0.15	330	99	75000	3	0.15	0.45
	682AZZ	2.5	2.6	7.1		0.08	209	74	71000	3.7	0.08	0.42	
	692AZZ		7	3.5	8.5	0.9	0.15	386	129	63000	3.85	0.15	0.68
	673ZZ	3	6	2.5	7.2	0.6	0.08	242	94	71000	3.6	0.08	0.26
	683ZZ		7	3	8.1	0.8	0.1	390	130	63000	3.9	0.1	0.53
	693ZZ	3	8	4	9.5	0.9		560	180	60000			0.72
	603ZZ		9	5	10.5		0.15	571	189	56000	4.2	0.15	1.61
	623ZZ	4	10	4	11.5	1		640	224	50000			1.8
	674ZZ		7	2.5	8.2	0.6	0.08	222	88	60000	4.6	0.08	0.35
	684ZZ	4	9		10.3		0.15	640	224	53000	5	0.1	1.14
	694ZZ		11	4	12.5			715	276		5.2	0.15	2
	604ZZ	4	12		13.5	1		957	350	48000			2.57
	624ZZ		13	5	15		0.2	1310	490	40000	5.6	0.2	3.5
	675ZZ	5	8	2.5	9.2	0.6	0.08	217	91	53000		0.08	0.4
	685ZZ		11	5	12.5		0.15	715	282	45000	6.2	0.15	2.18
	695ZZ	5	13	4	15		0.2	1080	430	43000	6.6	0.2	2.7
	605ZZ		14		16	1		1330	505	40000			3.9
	625ZZ	6	16	5	18		0.3	1729	675	36000	7.7	0.3	5.52
	676ZZ		10	3	11.2	0.6	0.1	465	196	45000	6.6	0.1	0.74
	686ZZ	6	13		15	1.1	0.15	1080	440		7	0.15	3.04
	696ZZ		15	5	17		0.2	1350	530	40000	7.6	0.2	4.3
	606ZZ	6	17		19	1.2		2190	865	38000			6.5
	626ZZ		19	6	22	1.5	0.3	2336	896	32000	8	0.3	9.78
	678ZZ	8	12	3.5	13.6	0.8	0.1	515	252	40000	8.8	0.1	0.86
	688ZZ		16	5	18	1.1	0.2	1610	715	36000	9.6	0.2	4.47
	698ZZ	8	19	6	22		0.3	1990	865				8.4
	608ZZ		22	7	25	1.5	0.3	3350	1400	34000	10	0.3	13
	6700ZZ	10	15	4	16.5	0.8	0.15	855	435	15000	10.3	0.15	2.1
	6800ZZ		19	5	21	1		1716	840	37000	12		6.1
	6900ZZ	10	22	6	25	1.5	0.3	2695	1273	34000	13.2	0.3	11.1
	6701ZZ		18	4	19.5	0.8	0.2	926	530	13000	12.4	0.2	3.4
	6801ZZ	12	21	5	23	1.1		1915	1041	33000			7.1
	6901ZZ		24	6	26.5	1.5	0.3	2886	1466	31000	14	0.3	13.2
	6702ZZ	15	21	4	22.5	0.8	0.2	937	582	11000	15.4	0.2	3.9
	6802ZZ		24	5	26	1.1		2073	1253	28000	17	0.3	8.3
	6902ZZ	15	28	7	30.5	1.5	0.3	4321	2259	26000			19.9
	6703ZZ		23	4	24.5	0.8	0.2	1000	658	9500	17.4	0.2	4.4
	6803ZZ	17	26	5	28	1.1		2233	1456	26000			8.9
	6903ZZ		30	7	32.5	1.5	0.3	4588	2565	23000	19	0.3	21.4
6704ZZ*	20	27	4	28.5	0.8	0.2	1041	729	8500	20.4	0.2	6.3	
6804ZZ		32	7	35	1.5		4015	2462	21000	22		19.8	
6904ZZ	25	37		40	2		6381	3682	19000		0.3	42.8	
6805ZZ		37	7	40	1.5	0.3	4303	2932	18000	27		26.1	
6905ZZ*	42	9	45	2		7001	4540	16000			50.2		

① 带*规格不适用BAL...-SUS。

① 1Kg=9.81N



代码	型号	轴承型号	d	D
BAL		682ZZ	2	5
		692ZZ	2	6



数量	1~9	10~
价格	100%	另行报价

交货期
5

轴承
关节
轴承

E7

BAL682ZZ

未税价(元)