







代码	类型	定位精度(间隙)	材质	硬度
J-PDC41	精密型	0.002~0.008	SKD11	58~62HRC



T16/20




T25



T30/40

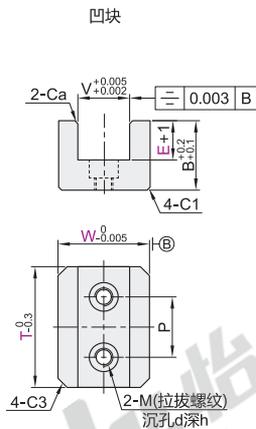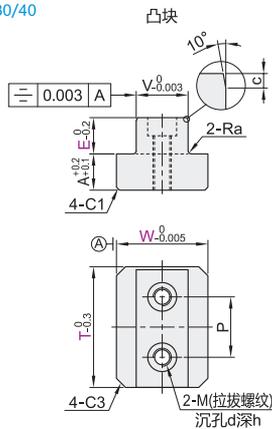

装配图



视角标准：第一视角


型号	代码	W	T	E	V	H	A	B	c	Ra	Ca	螺孔				安装螺栓	螺孔数量
												P	M	d	h		
J-PDC41	16	16	16	8	9	26	8	17	1	0.5	0.5	—	M4	6.5	3.5	M4	1
			20									—					
	20	20	10	12	15	32	10	21	1	0.5	0.5	15	M5	8	5	M4	2
				25								—					
	25	25	12	17	36	12	23	1	0.5	0.5	0.5	15	M6	9.5	6	M5	2
												30					
30	30	—	—	—	—	—	—	—	—	—	—	20	—	—	—	—	

有效定位量

E	S(max) (有效定位量)
8	5.5
10	7.5
12	9.5

注意事项:

使用时需保留1mm左右的端面间隙, 以防止合模时凸块和凹块的端面发生碰撞, 造成破损。



型号		
代码	W	E
J-PDC41	30 40	30 12

J-PDC41—W30—T40—E12



优惠价	
数量	1~5    6~
价格	100% 另行报价



12