

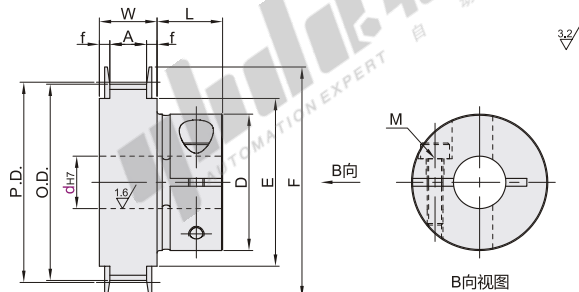


代码	类型	材质		表面处理	附件
		带轮	法兰		
EDA01	夹持型	铝合金	铝合金	本色阳极氧化	1个内六角圆柱头螺钉(SUS304)

特点：易于定位，只需紧固螺栓即可连接轴。



标准齿形



① 轴孔内有可能未进行表面处理，齿槽尺寸会因齿数不同而略有差异。

② “可选加工”见同步轮产品简介(适用FC可选加工)。



S3M型

型号		带轮类型	轴孔规格dH7	P.D.	O.D.	D	F	E	L	f	带轮公称宽度		夹紧螺栓	
代码	齿数										A	W	M-长度	紧固扭矩(N·m)
EDA01	24		4	22.92	22.16		25	16			皮带宽度6 S3M060 A: 7 W: 11	M2-8	0.4	
	26		4	24.83	24.07	13	28	18						
	28		4	26.74	25.98		30	20	9					
	30		6 8	28.65	27.89		32	23						
	32	S3M060	6 8	30.56	29.8		35	25			皮带宽度10 S3M100 A: 11 W: 15	M2.5-8	1.5	
	36		6 8	34.38	33.62		40	28						
	40	S3M100	8 10	38.2	37.44	26	44	32	12.5	2				
	44		8 10	42.02	41.25	31	48	36						
	48		8 10 11 12	45.84	45.07	33	50	38	14					
	50		8 10 11 12 13 14	47.75	46.98	36	52	40						
	60		8 10 11 12 13 14 15 16	57.3	56.53	41	61	46	15.5				M5-16	6

S5M型

型号		带轮类型	轴孔规格dH7	P.D.	O.D.	D	F	E	L	f	带轮公称宽度		夹紧螺栓	
代码	齿数										A	W	M-长度	紧固扭矩(N·m)
EDA01	24		8 10	38.2	37.24						皮带宽度10 S5M100 A: 11 W: 16	M3-10	1.5	
	25		8 10	39.79	38.83	26	45	30	12.5					
	26		8 10	41.38	40.42									
	28		8 10	44.56	43.6	31	48	35						
	30		10	47.75	46.79		52	36	14		皮带宽度15 S5M150 A: 17 W: 22	M4-14	3.5	
	32		10 11 12 13 14	50.93	49.97	36	55	40						
	34		10 11 12 13 14 15 16	54.11	53.15									
	36		10 11 12 13 14 15 16	57.3	56.34	41	61	45	15.5					
	40	S5M100	10 11 12 13 14 15 16 17 18 19	63.66	62.7	46	67	50		2.5				
	44		12 13 14 15 16 17 18 19	70.03	69.07	46	74	58	15.5					
	48		20 21 22 23 24			55			16.5		M5-16	12	6	
			12 13 14 15 16 17 18 19	76.39	75.43	46	83	63	15.5					
			20 21 22 23 24 25			55			16.5					
	50		12 13 14 15 16 17 18 19	79.58	78.62	46	87	67	15.5					
			20 21 22 23 24 25			55			16.5					
			12 13 14 15 16 17 18 19			46			15.5					
	60		20 21 22 23 24 25	95.49	94.53	55	99	80	15.5					
									16.5					

夹持型高扭矩圆弧齿同步轮

◀ S3M/S5M/S8M型

☑ S8M型

型号		带轮类型	轴孔规格d _{H7}	P.D.	O.D.	D	F	E	L	f	带轮公称宽度		夹紧螺栓	
代码	齿数										A	W	M-长度	紧固扭矩(N·m)
EDA01	20		12 13 14	50.93	49.56	36	58	40	14				M4-14	3.5
	22		12 13 14 15 16	56.02	54.65	41	61	45						
	24		12 13 14 15 16 17 18 19	61.12	59.74		67	50	16				M5-16	6
	25		12 13 14 15 16 17 18 19	63.66	62.29	46	70	56			皮带宽度15			
	28		15 16 17 18 19	71.3	69.93		80	60			S8M150			
	30	S8M150	20 21 22 23 24 25			55			17		A: 17		M6-20	12
			15 16 17 18 19	76.39	75.02	46			16	2.5	W: 22		M5-16	6
	32	S8M250	20 21 22 23 24 25			55			17		皮带宽度25		M6-20	12
			18 19	81.49	80.12	46	87	67	16		S8M250		M5-16	6
	34		20 21 22 23 24 25			55			17		A: 28		M6-20	12
			18 19	86.58	85.21	46	95	75	16		W: 33		M5-16	6
	36		20 21 22 23 24 25			55			17				M6-20	12
			18 19	91.67	90.3	46	99	80	16				M5-16	6
			20 21 22 23 24 25			55			17				M6-20	12



请按图示订货

☑ S8M型

型号	带轮类型	轴孔规格d _{H7}
EDA01	24 S8M150 25 S8M250	13 14

EDA01—24—S8M150—d12

☑ 可选加工(S8M型)

型号	带轮类型	轴孔规格d _{H7}	可选加工代码
EDA01	24 S8M150 25 S8M250	13 14	FC62

EDA01—24—S8M150—d12—FC62



未税价(元)

● 优惠价

数量	1~50	51~
价格	100%	另行报价



交货期

12

☑ 容许扭矩(S3M型)

带轮类型	齿数	轴孔规格d	容许扭矩(N·m)
S3M	24 26 28	4	0.16
	30 32	6	0.95
		8	2.6
	36	6	0.95
		8	2.6
	40	8	
		10	
	44	8	
		10	
	48	8	
		10	
	50	11	2.6
		12	
	60	14	7.6
		8	
		10	
		11	2.6
		12	
		13	
		14	7.6
		15	
		16	

☑ 容许扭矩(S5M型)

带轮类型	齿数	轴孔规格d	容许扭矩(N·m)
S5M	24 25	8	
		10	
	26 28	8	
		10	
	30	10	2.6
		11	
	32	12	
		13	
	34 36	14	7.6
		10	
	40	11	2.6
		12	
	44 48	13	
		14	7.6
	50 60	15	
		16	
		17	7.6
		18	
		19	
		12	2.6
		13	
		14	
		15	
		16	7.6
		17	
		18	
		19	
		20	48
		21	
		22	66
		23	
		24	95
		25	
		26	

☑ 容许扭矩(S8M型)

带轮类型	齿数	轴孔规格d	容许扭矩(N·m)
S8M	20	12	2.6
		13	
		14	7.6
		12	2.6
	22	13	
		14	7.6
		15	
		16	7.6
		12	2.6
		13	
	24 25	14	
		15	
		16	7.6
		17	
		18	
		19	
		15	
		16	
		17	7.6
		18	
	28 30	19	
		20	48
		21	
		22	66
		23	
		24	95
		25	
		26	