
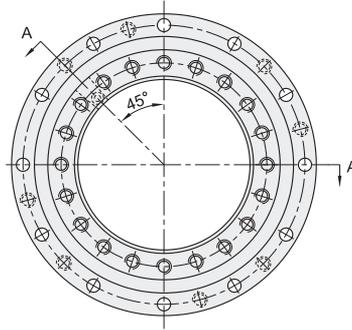


谐波减速器用交叉滚子轴承

◀ 外圈整体/内圈整体

代码	类型	轴承精度	轴承材质	
			国标	相当
BRC	外圈整体 内圈整体	P5	GCr15	SUJ2

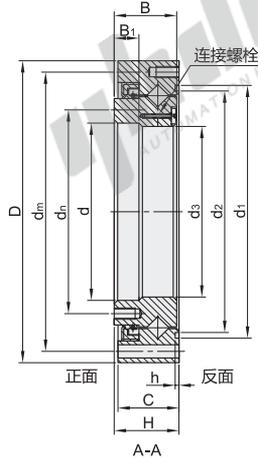

视角标准：第一视角

型号	外形尺寸											外圈安装孔		内圈安装孔		基本额定载荷 (KN)		重量 (KG) (参考)	
	d	d ₁	d ₂	d ₃	D	H	C	B	B ₁	h	中心径 d _m	安装孔尺寸1 (通孔)	安装孔尺寸2 (密封反面)	中心径 d _n	安装孔尺寸1 (密封正面)	安装孔尺寸2 (密封反面)	Cr(动)		Cor(静)
BRC-SHG(SHF)-14	38	57	53	36	70	15.1	14.1	14.6	5	1.2	64	8-Ø3.5	2-M3深8	44	12-M3深6	—	5.8	8.6	0.25
BRC-SHG(SHF)-17	47	68.1	64.1	44.1	80	17	16	16.4	6.5	1.2	74	12-Ø3.5	4-M3深8	54	20-M3深6	—	10.4	16.3	0.35
BRC-SHG(SHF)-20	54	78	72.6	—	90	18.5	17.5	17.5	—	1.6	84	12-Ø3.5	4-M3深6	62	16-M3深6	4-M3深6	14.6	22	0.5
BRC-SHG(SHF)-25	67	94.8	90	65	110	20.7	18.7	19.7	7.5	1.45	102	12-Ø4.5	4-M3深6	77	16-M4深8	—	21.8	35.8	0.8
BRC-SHG(SHF)-32	88	123	117.6	84	142	24.4	23.4	23.4	8	1.6	132	12-Ø5.5	4-M4深8	100	16-M5深8	4-M4深8	38.2	65.4	1.65
BRC-SHG(SHF)-40	108	148	142.6	106	170	30	29	28.5	9.5	1.55	158	12-Ø6.6	6-M4深9	122	16-M6深10	4-M5深10	43.3	81.6	2.8
BRC-SHG(SHF)-45	120	170	164	118	190	33	32	—	10	1.6	180	18-Ø6.6	6-M4深8	140	12-M8深10	4-M5深8	77.6	135	4.3
BRC-SHG(SHF)-50	135	188	182.6	129	214	36	34	—	—	1.6	200	12-Ø9	6-M5深12	154	16-M8深12	8-M5深10	81.6	149	5



型号	外形尺寸	
代码	d	d ₁
BRC-SHG(SHF)-14	38	57
BRC-SHG(SHF)-17	47	68.1
BRC-SHG(SHF)-14	38	57

请按图示订货

BRC-SHG(SHF)-14



未税价(元)

优惠价	
数量	1~200 201~
价格	100% 另行报价

交货期	
7	

