


随动杆

- 单衬套内置型
- 双衬套内置型


代码	类型	本体材质		衬套材质	表面处理		附件
		国标	相当		本体	衬套	
ZFL71	单衬套内置型	Q235	SS400	SPCC	发黑	—	TAY02 (1pcs)
ZFL72		0Cr18Ni9	SUS304		无电解镀镍		
ZFL73		—	—		—		
ZFL74	双衬套内置型	Q235	SS400	SPCC	发黑	—	—
ZFL75		0Cr18Ni9	SUS304		无电解镀镍		
ZFL76		—	—		—		



单衬套内置型
ZFL71/72/73

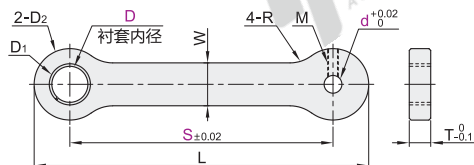

双衬套内置型
ZFL74/75/76

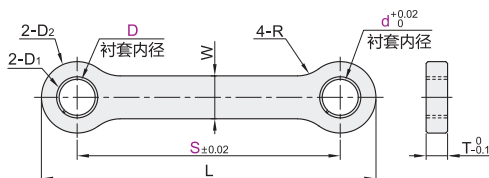

视角标准：第一视角

单衬套内置型

型号	D	d	S 最小单位1	D2	T	L	W	R	紧定螺钉 M
(SS400) ZFL71 ZFL72	3	3	30~150	16	5	S+16	10	8	d3~6时M3 d8~16时M4 d18~25时M5
	4	3 4		18	6	S+18	12	9	
	5	3 4 5		20	10	S+20	14	10	
	6	3 4 5 6	35~150	25	12	S+25	18	12.5	
(SUS304) ZFL73	8	4 5 6 8	35~200	28	12	S+28	20	14	
	10	5 6 8 10	40~200	32	12	S+32	22	16	
	12	6 8 10 12	45~200	36	12	S+36	25	18	
	13	6 8 10 12 13	50~300	45	12	S+45	32	22.5	
	15	8 10 12 13 15							
	16	8 10 12 13 15 16							
	18	10 12 13 15 16 18							
	20	10 12 13 15 16 18 20							
	25	12 13 15 16 18 20 25							

双衬套内置型

型号	D	d	S 最小单位1	D2	T	L	W	R
(SS400) ZFL74 ZFL75	3	3	30~150	16	5	S+16	10	8
	4	3 4		18	6	S+18	12	9
	5	3 4 5		20	10	S+20	14	10
	6	3 4 5 6	35~150	25	12	S+25	18	12.5
(SUS304) ZFL76	8	4 5 6 8	35~200	28	12	S+28	20	14
	10	5 6 8 10	40~200	32	12	S+32	22	16
	12	6 8 10 12	45~200	36	12	S+36	25	18
	13	6 8 10 12 13	50~300	45	12	S+45	32	22.5
	15	8 10 12 13 15						
	16	8 10 12 13 15 16						
	18	10 12 13 15 16 18						
	20	10 12 13 15 16 18 20						
	25	12 13 15 16 18 20 25						

衬套尺寸

D-d	D1	D1公差	衬套型号
3	5	+0.012 0	OFV01-d3-L4
4	6	+0.012 0	OFV01-d4-L4
5	7	+0.012 0	OFV01-d5-L4
6	8	+0.015 0	OFV01-d6-L4
8	10	+0.015 0	OFV01-d8-L5
10	12	+0.018 0	OFV01-d10-L8
12	14	+0.018 0	OFV01-d12-L8
13	15	+0.018 0	OFV01-d13-L8
15	17	+0.021 0	OFV01-d15-L10
16	18	+0.021 0	OFV01-d16-L10
18	20	+0.021 0	OFV01-d18-L10
20	23	+0.021 0	OFV01-d20-L10
25	28	+0.021 0	OFV01-d25-L10

双衬套内置型

型号	D	d	S 最小单位1
ZFL74	10	5 6 8 10	36~130
ZFL75	12	6 8 10 12	35~200

ZFL74—D10—d8—S35



优惠价
数量 1~9 10~
价格 100% 另行报价



交货期
7



请按图示订货

未税价(元)