


螺纹圆形连接器

方法兰插座 防水型

代码	类型	连接方式	材质			表面处理	
			外壳	绝缘体	接触体	外壳	接触体
ZIX68	防水型	方法兰插座	螺纹连接	锌合金	热塑塑料PPS (耐高温260℃)	铜	镀铬 镀金

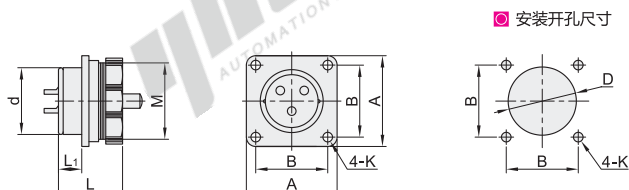

安装开孔尺寸



视角标准：第一视角

型号		规格	芯数	端头	d	M	L ₁	L	B	A	D	K	适配插头 代码	
代码	外壳形状													
ZIX68	Z (方法兰插座)		2									3.2	ZIX48	
			3											
		16	4											
			5		15.8	M18×1	9.7	21.6	20	26	16.5			
			7											
			9											
		10												
		20	2											
			3											
			4											
			5											
		6	J(插针)	19.8	M22×1	9.8		22	29	20.5				
		7	K(插孔)											
		9												
		12												
		10												
		24	12		23.8	M26×1	10	23	26	32	24.5			
			19											
			7											
		12												
		16												
		28	17		27.8	M30×1	9.8		30	36	28.5			
			20											
			24											
			26											



请按图示订货

型号		规格	芯数	端头
代码	外壳形状			
ZIX68	Z	16	4	J(插针)
			5	K(插孔)

ZIX68-Z-16-4-K

性能表

连接方式	螺纹连接
接线方式	焊接
接插次数	500次
温度范围	-40℃~+85℃
防护等级	IP67