



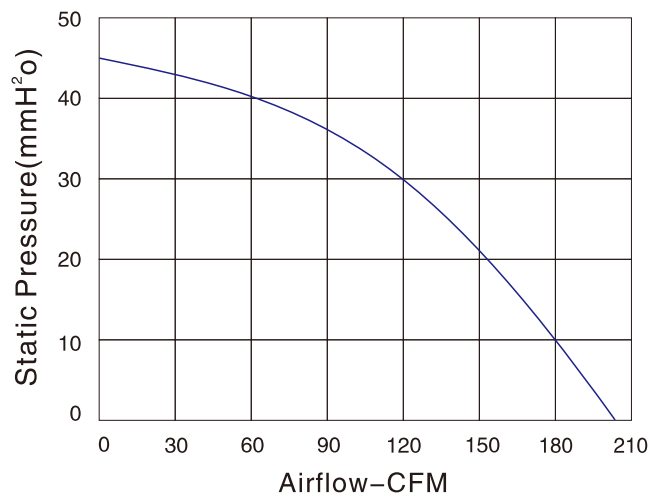

尺寸 Size: Ø133mmX62mm
 风量 Airflow: 202CFM
 噪音 Noise: 63dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH133AG24-B01	24	2	48	4500	202	45	63
YDH133AG48-A01	48	1	48	4500	202	45	63

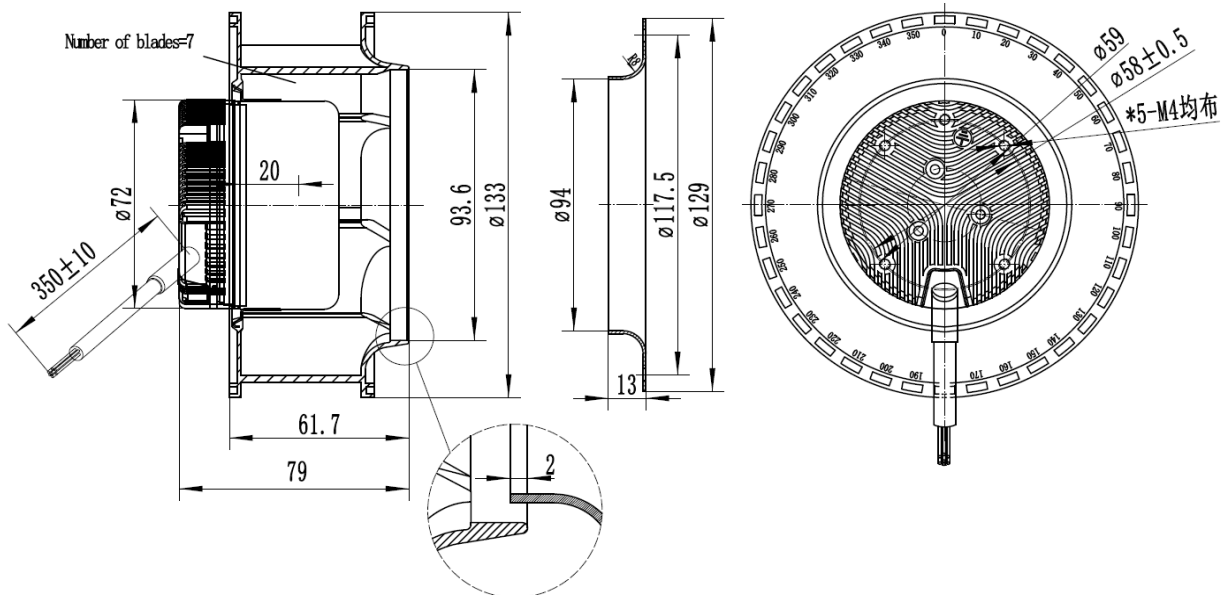

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机


Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS



UL
E248719

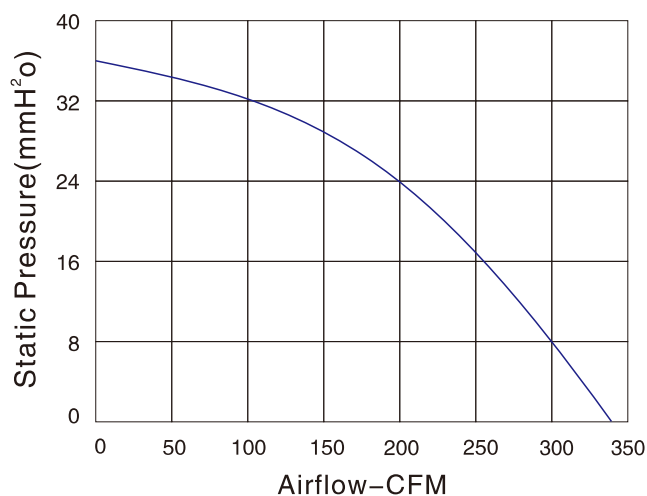

尺寸 Size: Ø175mmX65mm

风量 Airflow: 335CFM

噪音 Noise: 68dB(A)

风叶 Impeller Material: PA66



工作方式 Operation mode: S1

温度范围 Operating Temperature: -10℃~+65℃

防护等级 Type of protection: IP44


绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH175AG24-B01	24	1.8	43	3100	335	35.7	68
YDH175AG48-A01	48	0.9	43	3100	335	35.7	68

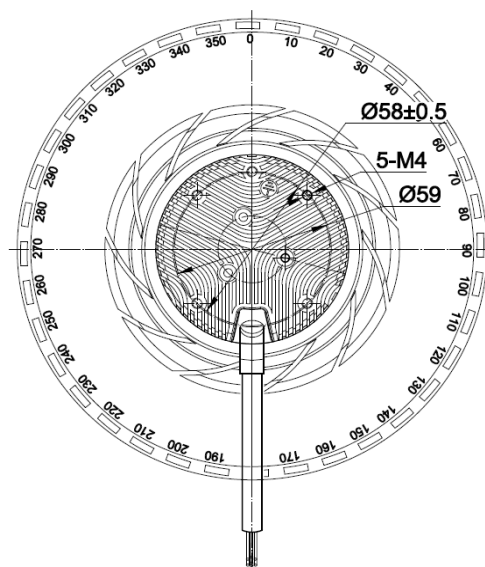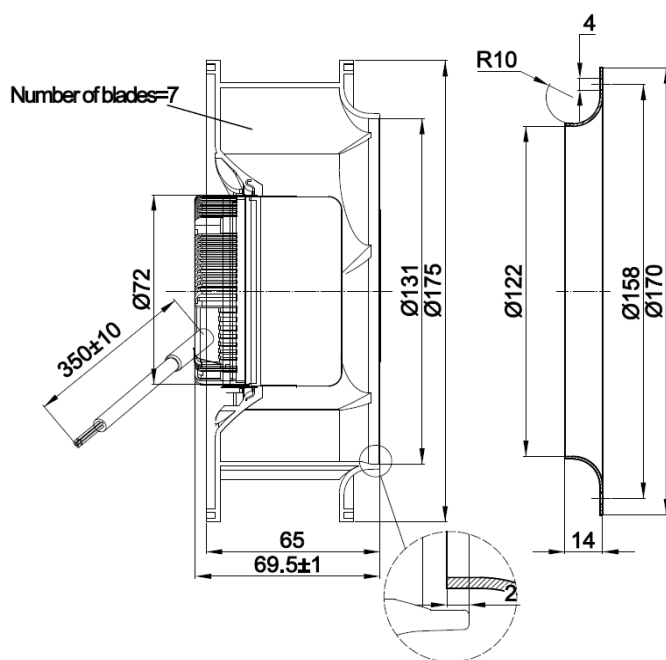


本样品仅供参考，具体以规格书为准。
This sample is for reference only. Please refer to the specification for details.
如有特殊要求，请向本公司索取样品。本公司保留技术改动的权利。
Special requirements may be provided (according to the request) along with technical modification rights reserved.


Http://www.xtgygs.cn

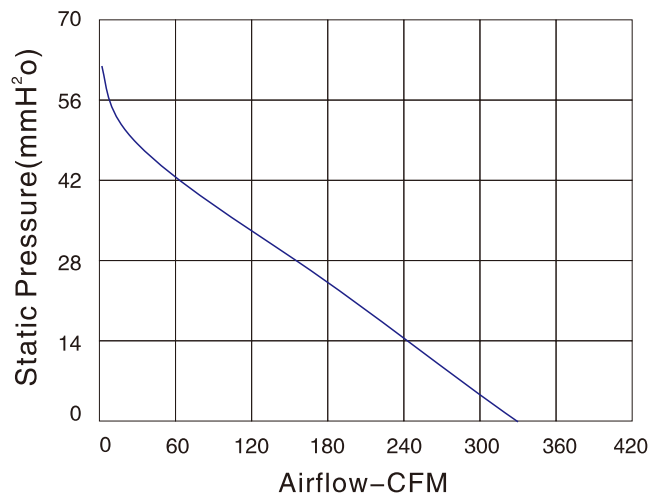

尺寸 Size: Ø180mmX69mm
 风量 Airflow: 340CFM
 噪音 Noise: 61dB(A)
 风叶 Impeller Material: ABS+GF
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH180AG24-B01	24	2.4	58	2800	340	62.7	61
YDH180AG48-A01	48	1.2	58	2800	340	62.7	61

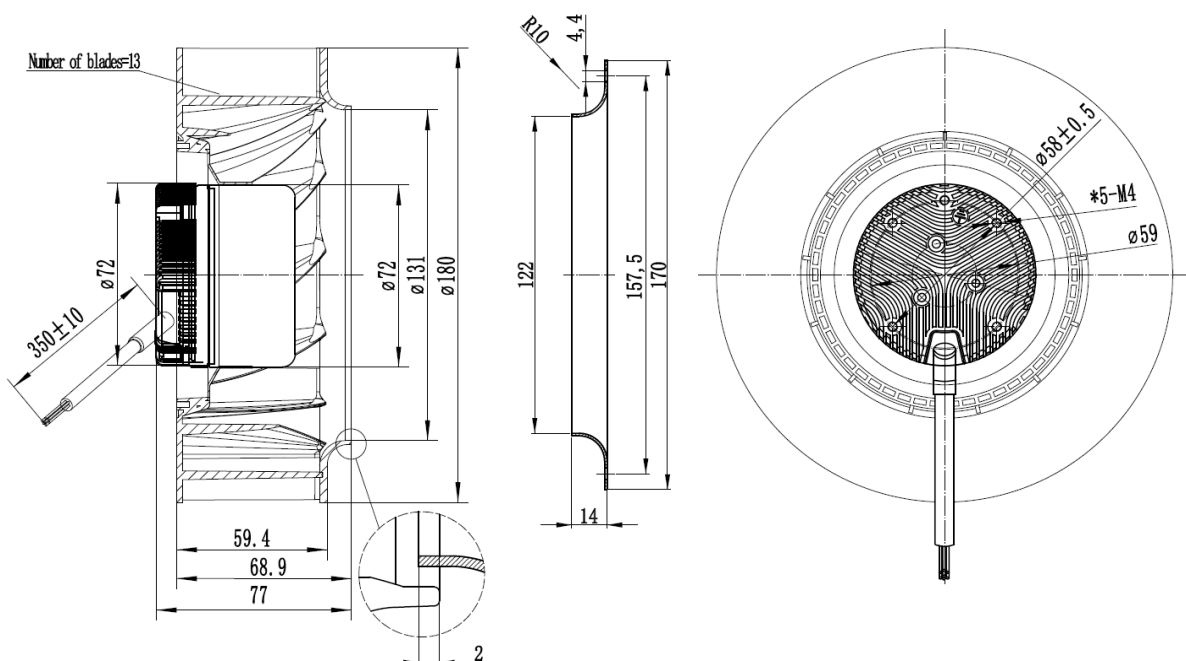


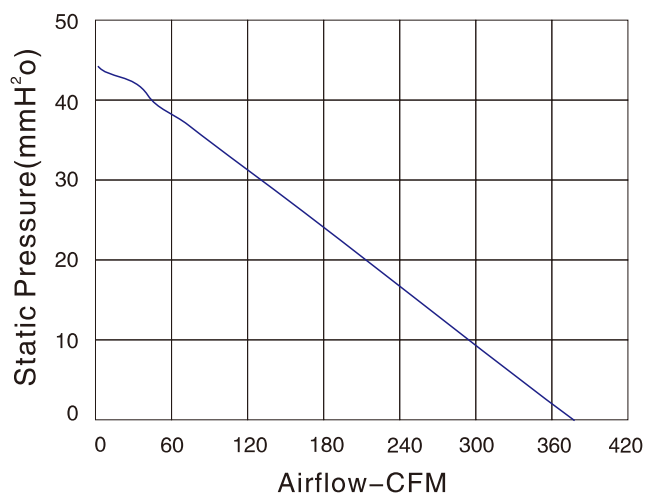

尺寸 Size: Ø190mmX61mm
风量 Airflow: 336CFM
噪音 Noise: 64dB(A)
风叶 Impeller Material: PA66
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB (A)
YDH190BG24-B01	24	2.6	62	3000	366	44	64
YDH190BG48-A01	48	1.3	62	3000	366	44	64

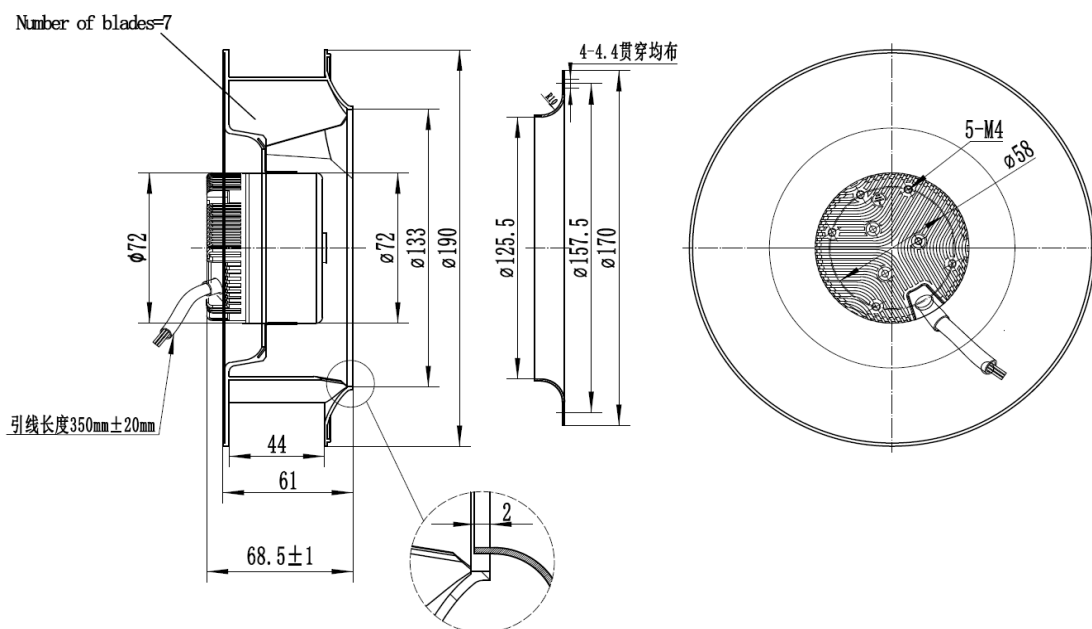

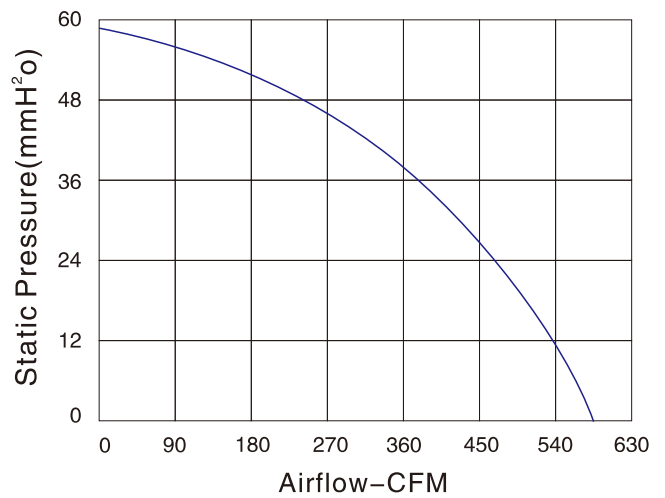

尺寸 Size: Ø220mmX65mm
 风量 Airflow: 583CFM
 噪音 Noise: 75dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH220AG24-B01	24	3.4	82	2800	583	57.1	75
YDH220AG48-A01	48	1.7	82	2800	583	57.1	75

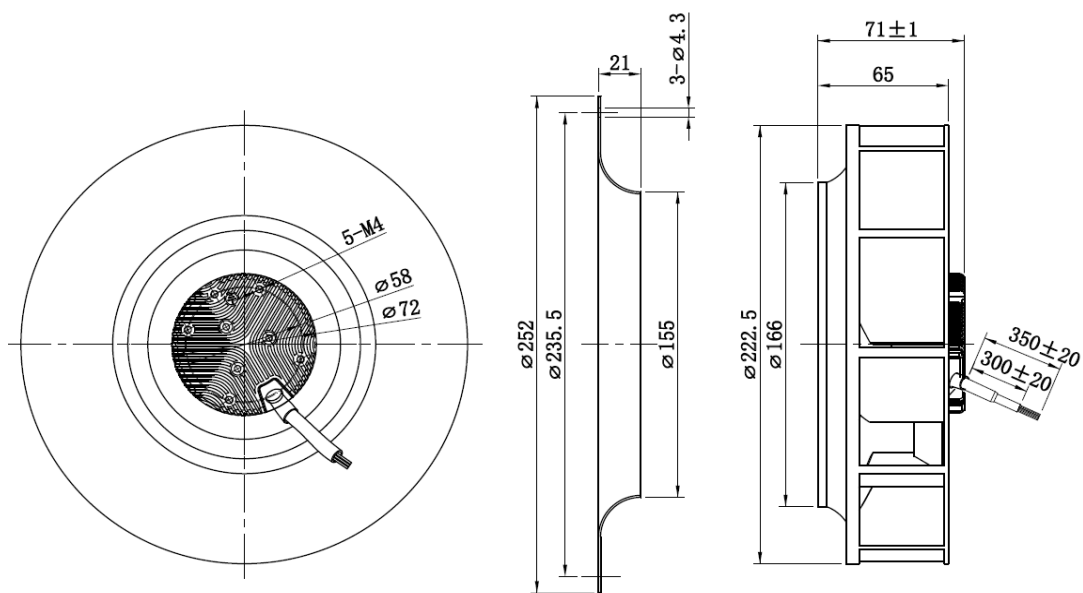

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机


Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS



UL
E248719

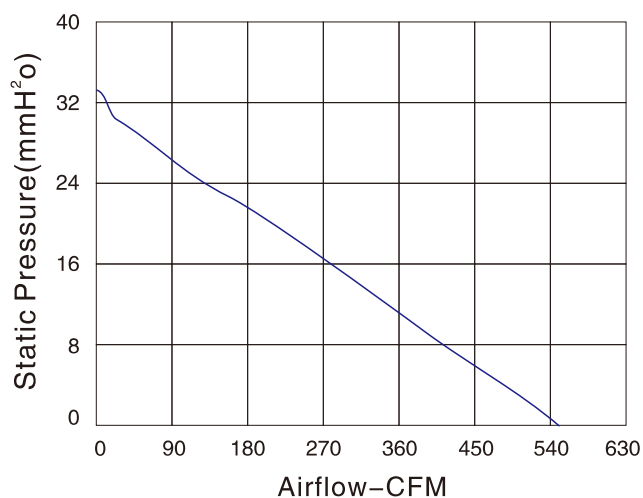

尺寸 Size: Ø220mmX93mm

风量 Airflow: 543.1CFM

噪音 Noise: 63dB(A)

风叶 Impeller Material: ABS+GF


工作方式 Operation mode: S1

温度范围 Operating Temperature: -10℃~+65℃

防护等级 Type of protection: IP44


绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH220BG24-B01	24	3.5	84	2000	543.1	33.2	63
YDH220BG48-A01	48	1.75	84	2000	543.1	33.2	63

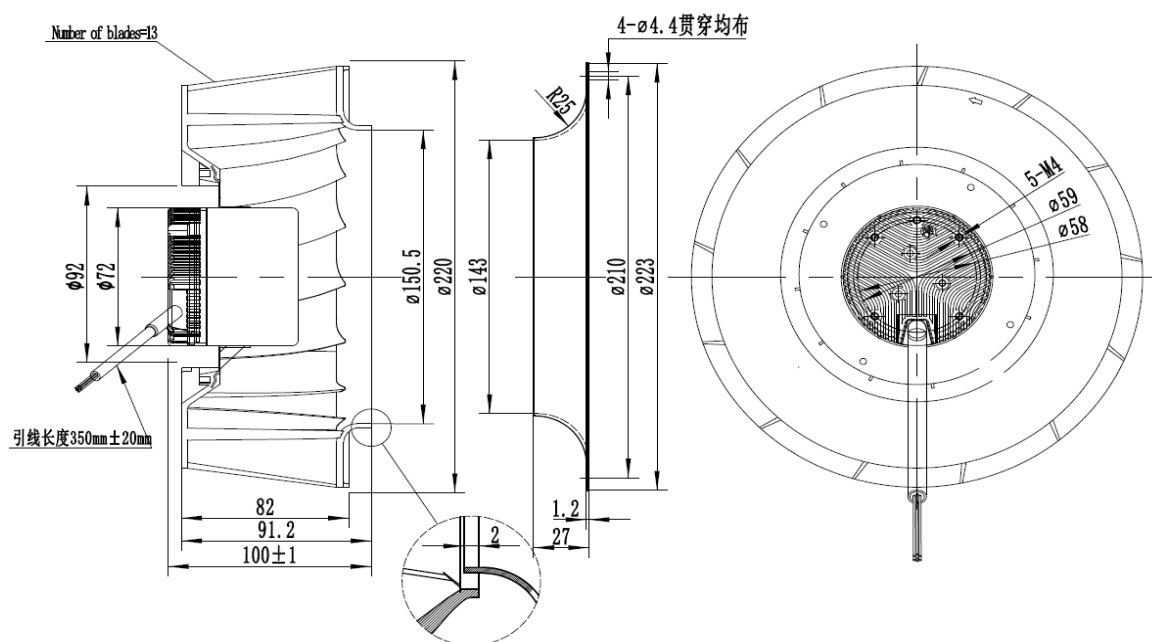


本样册仅供参考，具体以实物为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压或功率，请向本公司索取技术资料。
Special voltage may be provided (according to the request) along with technical modification rights reserved.

Http://www.xtgygs.cn

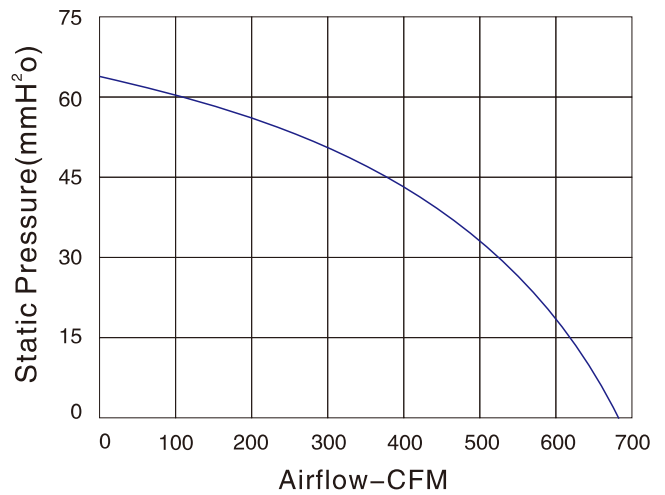

尺寸 Size: Ø225mmX75mm
 风量 Airflow: 683CFM
 噪音 Noise: 73dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH225BG24-B01	24	3.5	85	3000	683	66.3	73
YDH225BG48-A01	48	1.8	85	3000	683	66.3	73

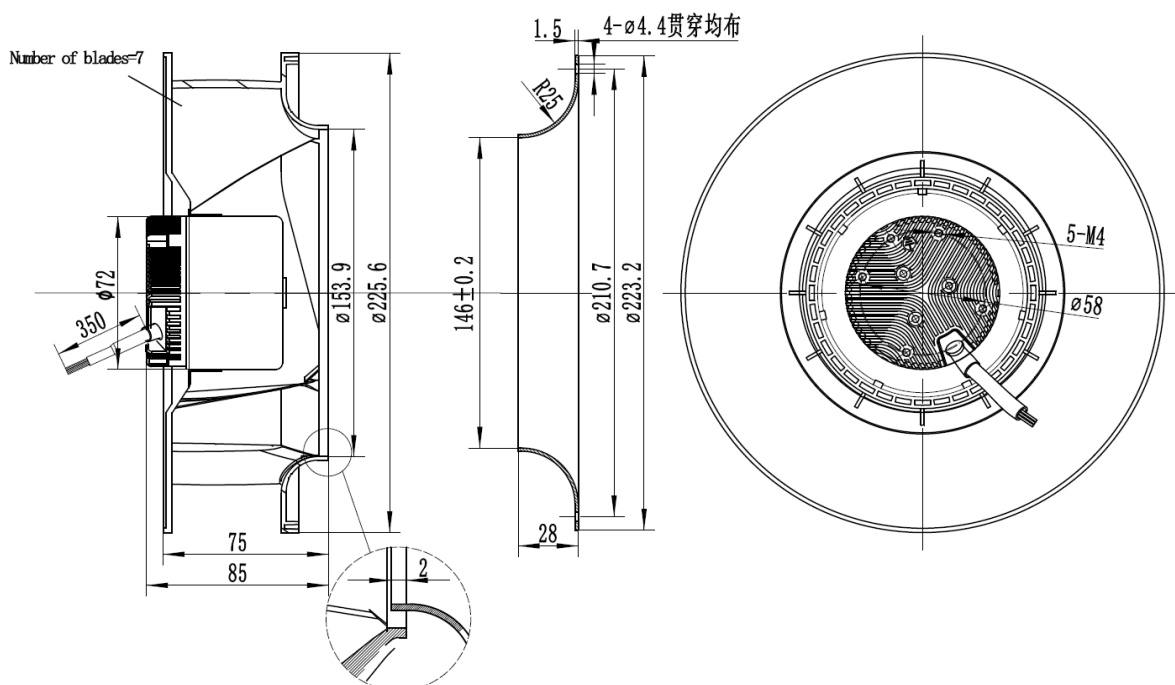

AC Axial Fan
AC 轴流风机

AC All-Metal Axial Fan
AC 全金属轴流风扇

DC Axial Fan
DC 轴流风机

DC Centrifugal Fan
DC 离心风机

EC Axial Fan
EC 轴流风机

EC Centrifugal Fan
EC 离心风机

AC Centrifugal Fan
AC 离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS




UL
E248719



CE

本样册仅供参考，具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压，请向制造商订购。本公司保留技术改动的权利。
Special voltage may be provided (according to the request) along a technical modification right reserved.

Http://www.xtgygs.cn

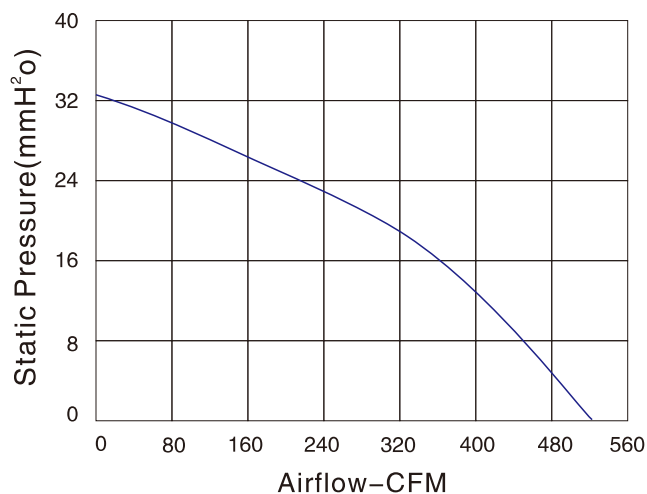

尺寸 Size: Ø225mmX89mm

风量 Airflow: 733.2CFM

噪音 Noise: 69.8dB(A)

风叶 Impeller Material: PA66


工作方式 Operation mode: S1


温度范围 Operating Temperature: -10°C~+65°C

防护等级 Type of protection: IP44

绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH225CG24-B01	24	2.8	68	2000	543.1	33.2	63
YDH225CG48-A01	48	1.4	68	2000	543.1	33.2	63

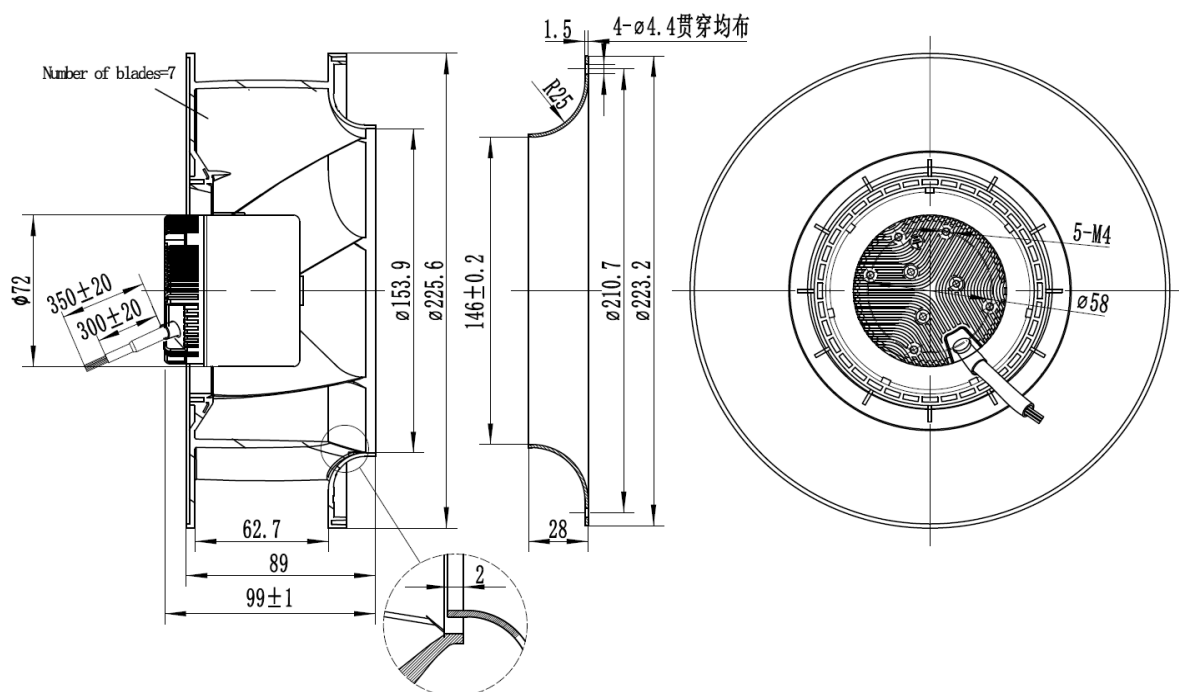

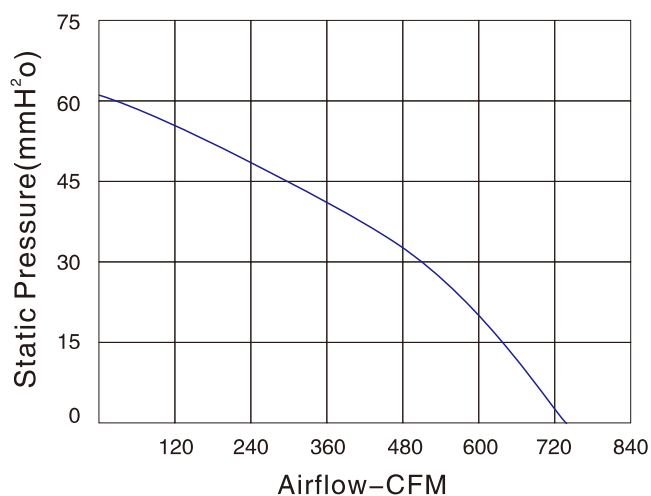

尺寸 Size: Ø225mmX89mm
 风量 Airflow: 733.2CFM
 噪音 Noise: 69.8dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10°C~+65°C
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH225CH24-A01	24	5.8	140	2700	733.2	60.5	69.8
YDH225CH48-A01	48	2.9	140	2700	733.2	60.5	69.8

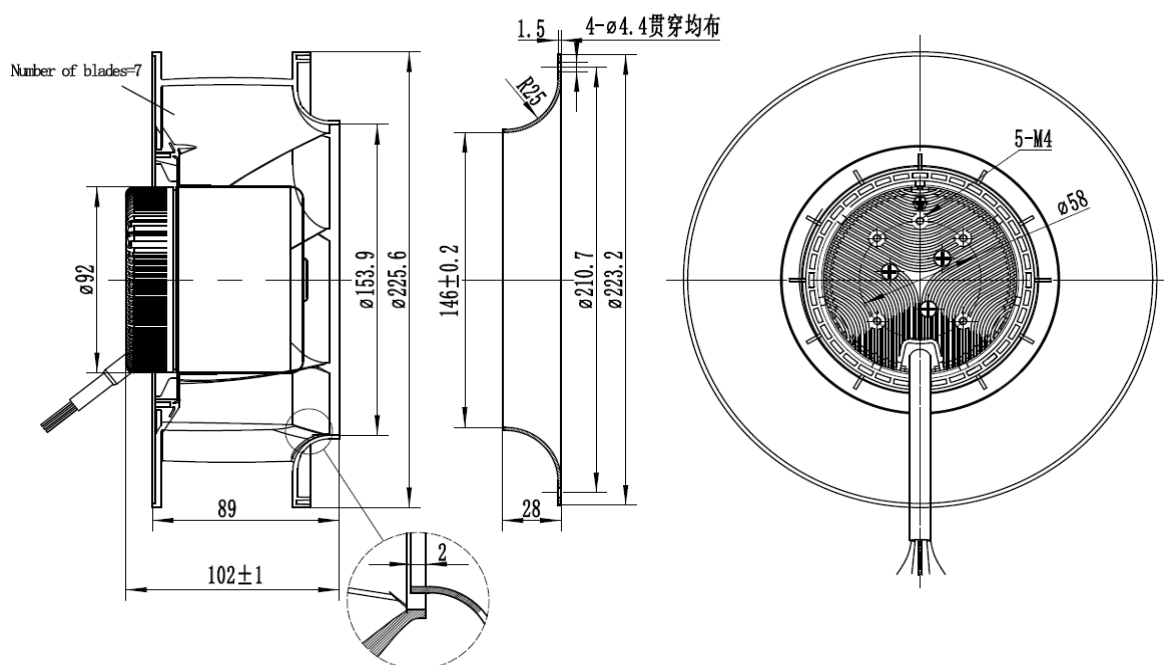

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机


Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS





UL
E248719

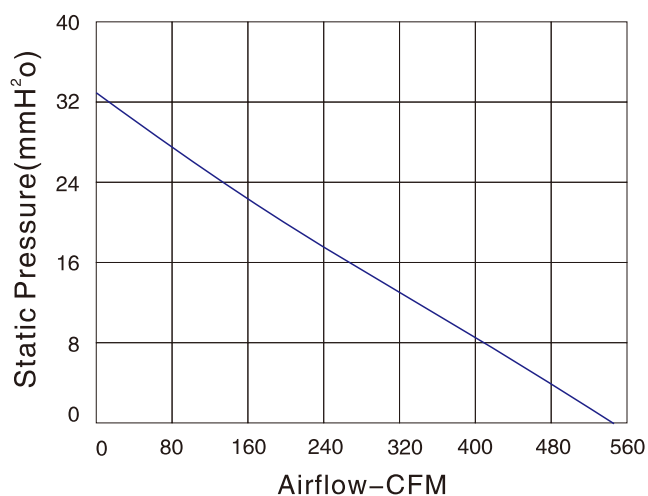


尺寸 Size: Ø225mmX93mm
风量 Airflow: 543.1CFM
噪音 Noise: 63dB(A)
风叶 Impeller Material: ABS+GF
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH225DG24-B01	24	3.5	84	2000	543.1	33.2	63
YDH225DG48-A01	48	1.75	84	2000	543.1	33.2	63

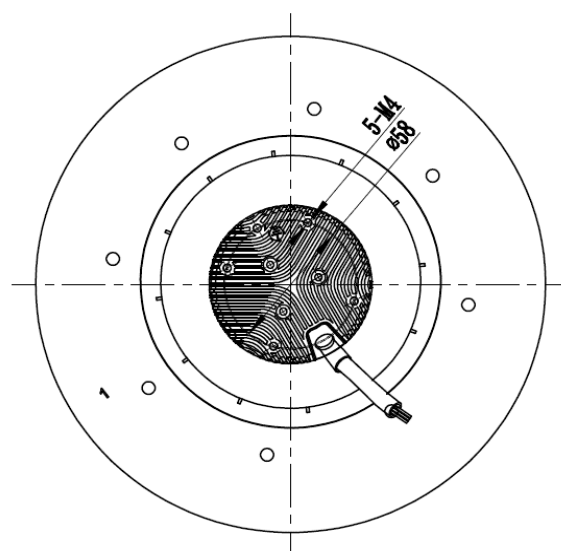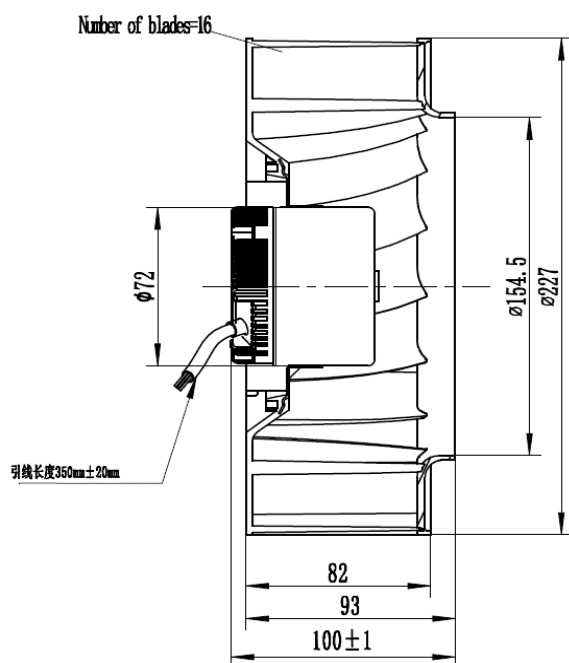


本样品仅供参考，具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如有特殊要求，请向本公司索取详细资料。本公司保留技术改动的权利。
Special requirements may be provided (according to the request) along with technical modification rights reserved.

[Http://www.xtgygs.cn](http://www.xtgygs.cn)

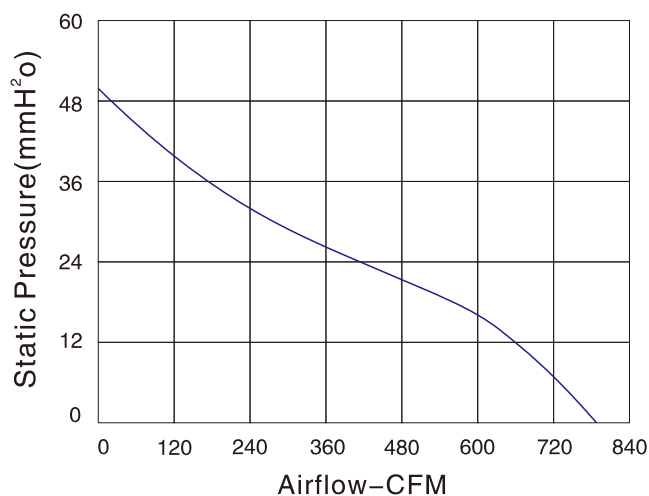

尺寸 Size: Ø250mmX81mm
 风量 Airflow: 788.3CFM
 噪音 Noise: 73.3dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10°C~+65°C
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH250AH24-A01	24	4.8	115	2400	788.3	50.4	73.3
YDH250AH48-A01	48	2.4	115	2400	788.3	50.4	73.3

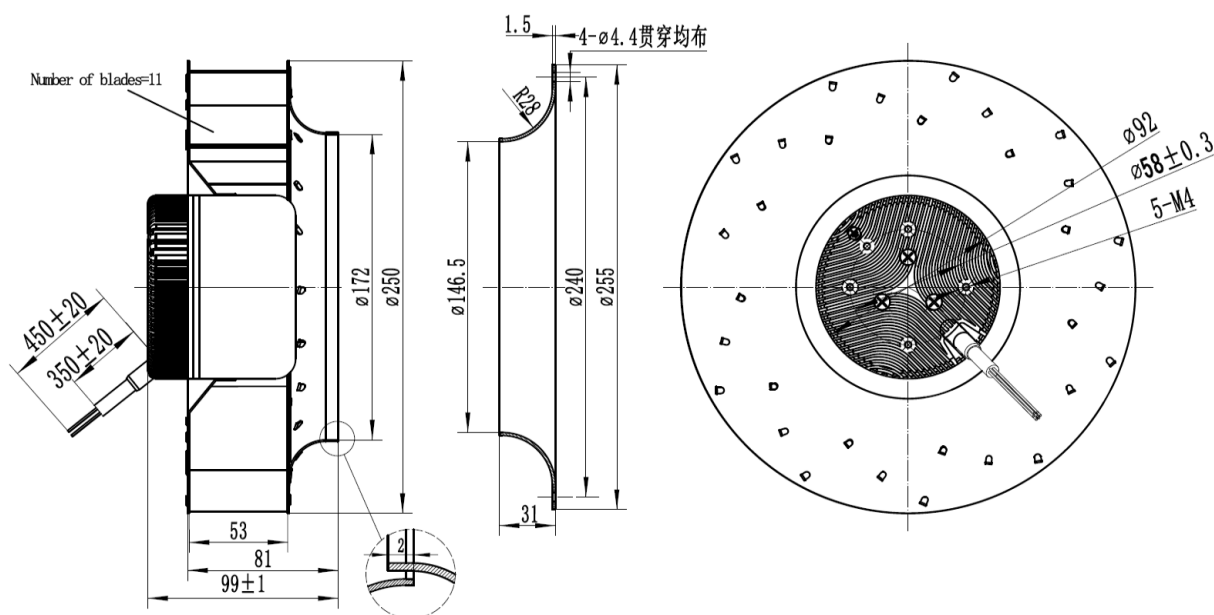

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机


Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS



UL
E248719

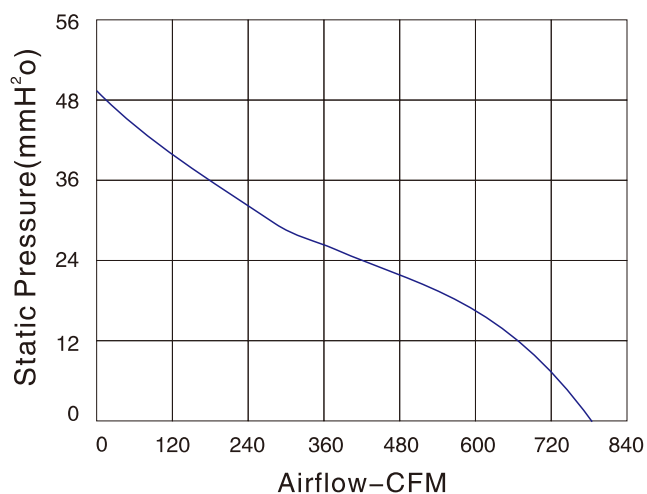

尺寸 Size: Ø250mmX86mm

风量 Airflow: 788.3CFM

噪音 Noise: 73.3dB(A)

风叶 Impeller Material: PA66


工作方式 Operation mode: S1

温度范围 Operating Temperature: -10℃~+65℃

防护等级 Type of protection: IP44


绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH250BH24-A01	24	3.7	88	2400	788.3	50.4	73.3
YDH250BH48-A01	48	1.8	88	2400	788.3	50.4	73.3

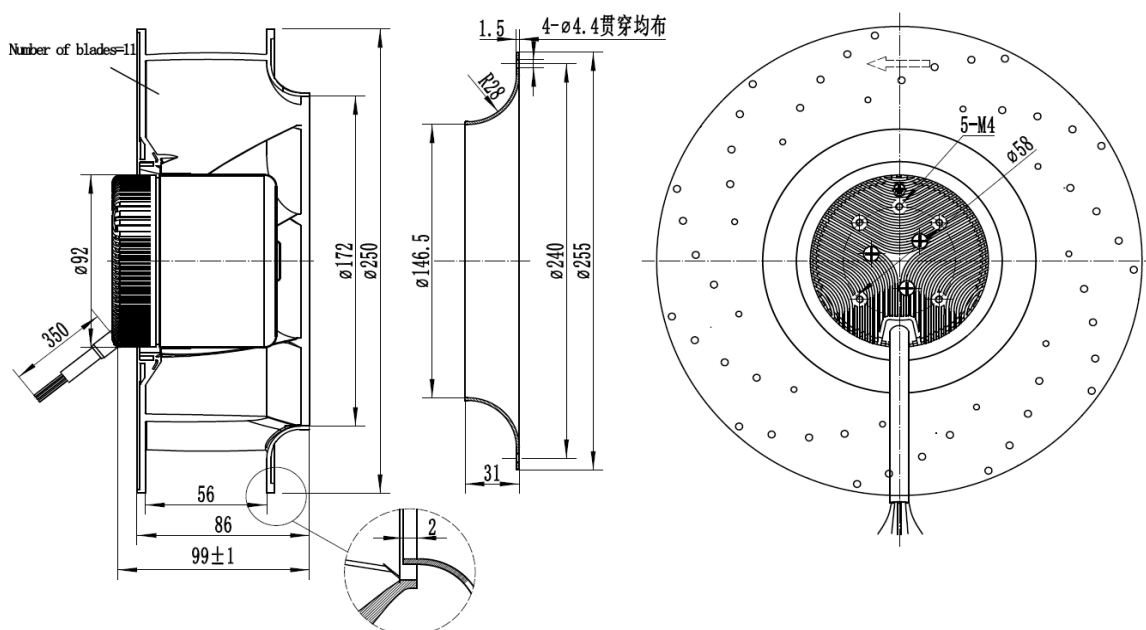


本样册仅供参考，具体以图纸为准。
This sample book is for reference only. Please refer to the specification for details.
如有特殊要求，请向本公司索取详细资料。本公司保留技术改动的权利。
Special requirements may be provided (according to the request) along with technical modification rights reserved.

Http://www.xtgygs.cn

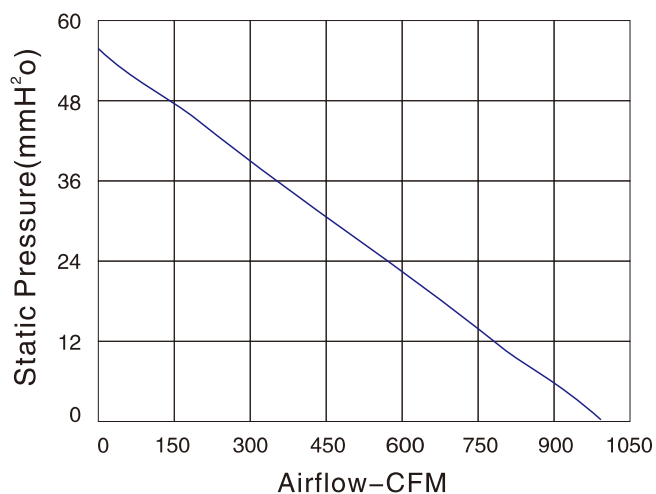

尺寸 Size: Ø280mmX81mm
 风量 Airflow: 990.4CFM
 噪音 Noise: 71.8dB(A)
 风叶 Impeller Material: Metal
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH280AH24-A01	24	4.3	105	2200	990.4	55.4	71.8
YDH280AH48-A01	48	2.2	105	2200	990.4	55.4	71.8

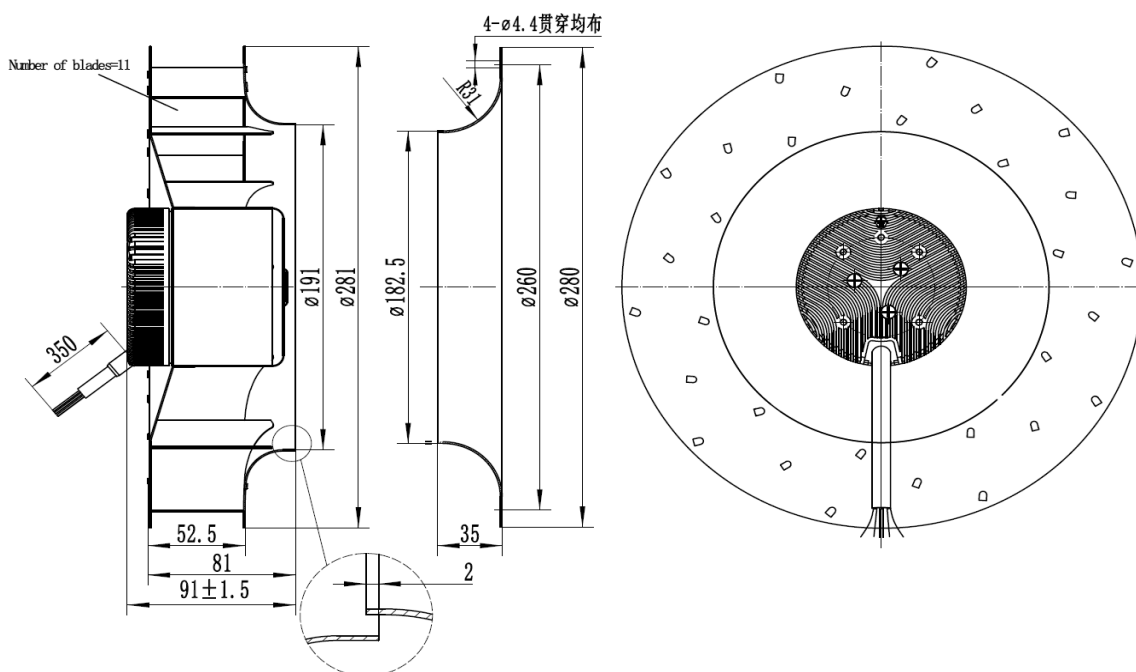

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机


Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS



UL
E248719

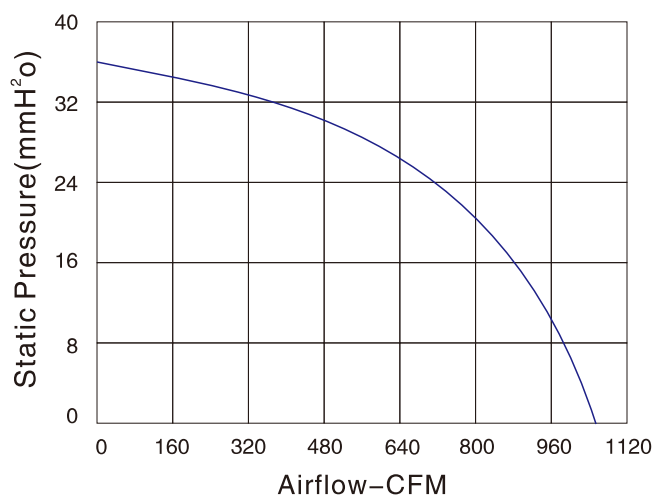

尺寸 Size: Ø280mmX112mm

风量 Airflow: 1051CFM

噪音 Noise: 67.9dB(A)

风叶 Impeller Material: Metal


工作方式 Operation mode: S1

温度范围 Operating Temperature: -10℃~+65℃

防护等级 Type of protection: IP44


绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VDC	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YDH280BH24-A01	24	4.8	115	1800	1051	36.4	67.9
YDH280BH48-A01	48	2.4	115	1800	1051	36.4	67.9

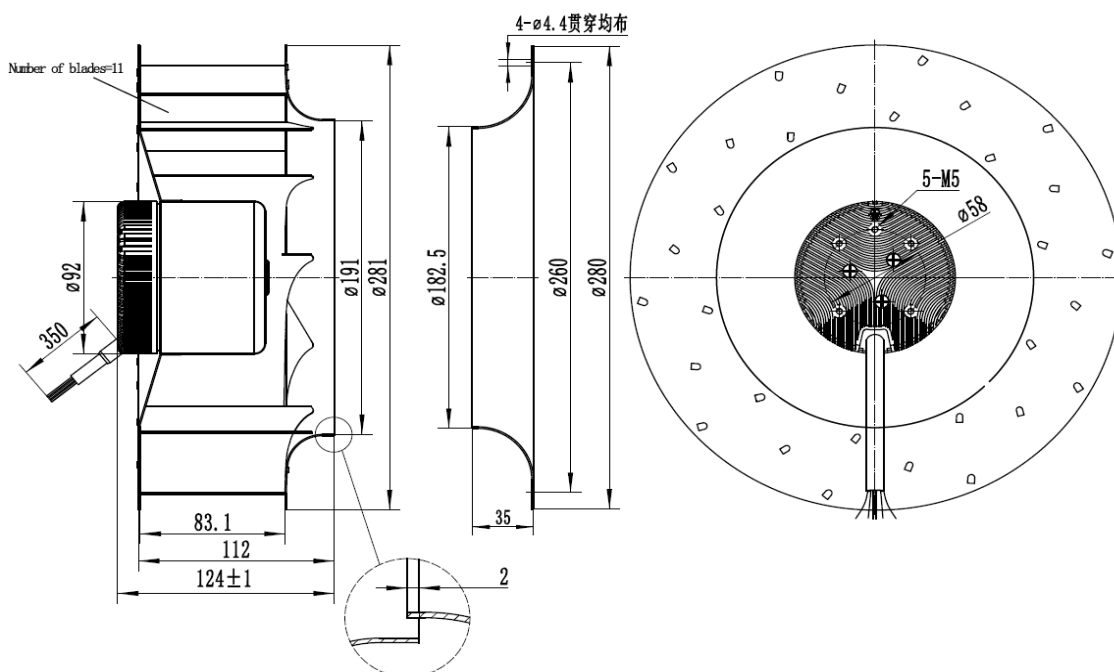


本样品仅供参考，具体以说明书为准。
This sample is for reference only. Please refer to the specification for details.
如有特殊要求，请向本公司索取技术资料。
Special requirements may be provided (according to the request) along with technical modification rights reserved.

Http://www.xtgygs.cn

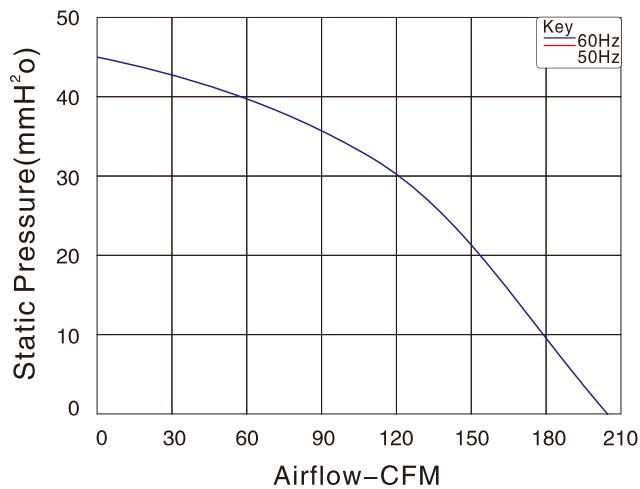

尺寸 Size: Ø133mmX62mm
 风量 Airflow: 202CFM
 噪音 Noise: 63dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB (A)
YEH133AGA2-A01	230	50/60	0.22	48	4500	202	45	63

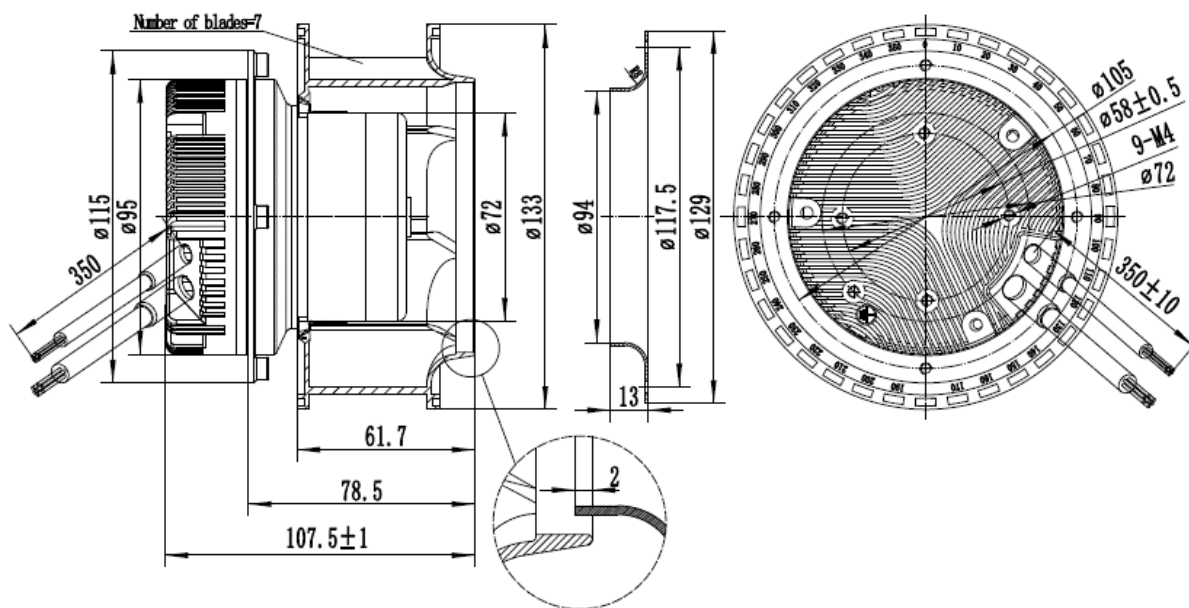

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC DC FANS COOLING FANS




UL
E248719




本样册仅供参考，具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压或特殊规格，本公司保留技术改动的权利。
Special voltage may be provided (according to the request) along a technical modification right reserved.


[Http://www.xtgygs.cn](http://www.xtgygs.cn)

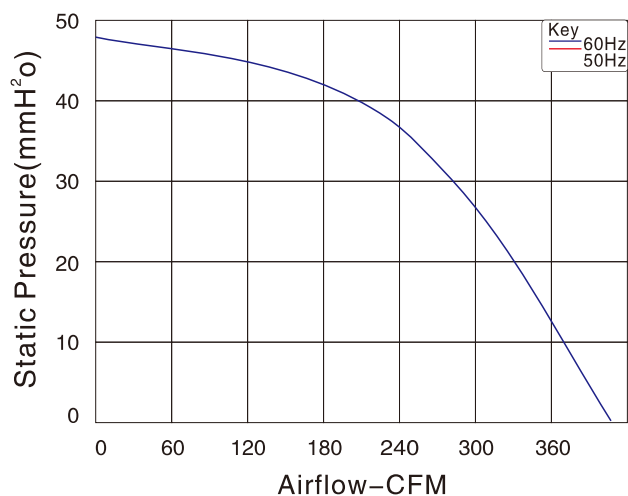

尺寸 Size: Ø175mmX65mm
风量 Airflow: 400.5CFM
噪音 Noise: 68dB(A)
风叶 Impeller Material: PA66
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH175AGA2-A01	230	50/60	0.2	43	3500	400.5	48.3	68

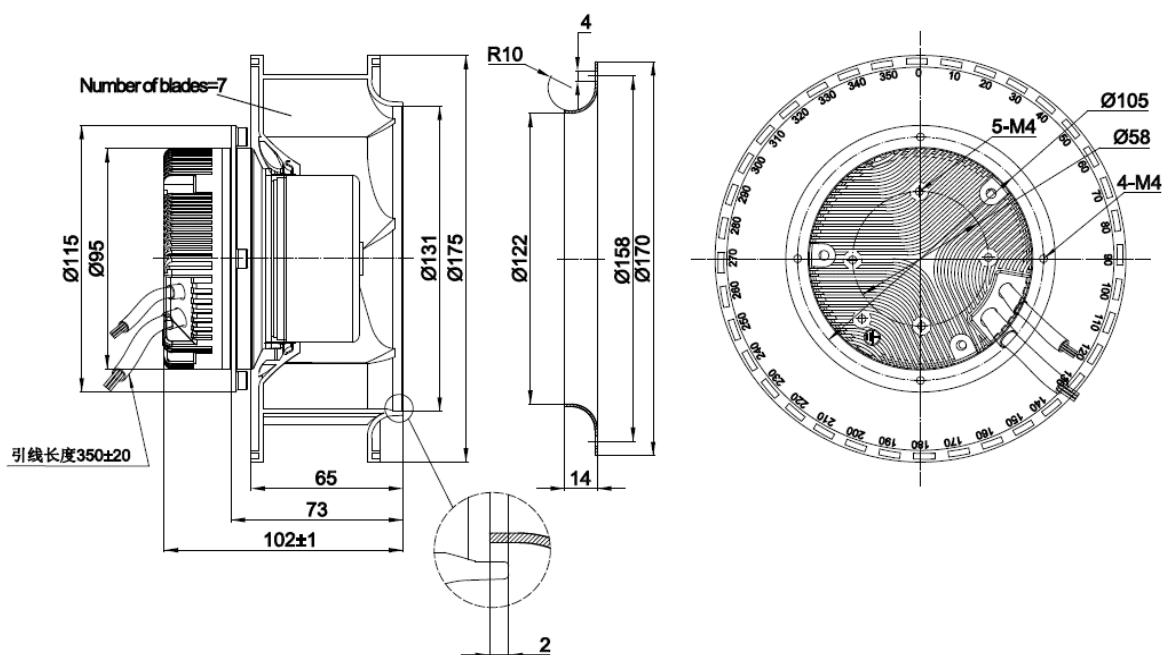


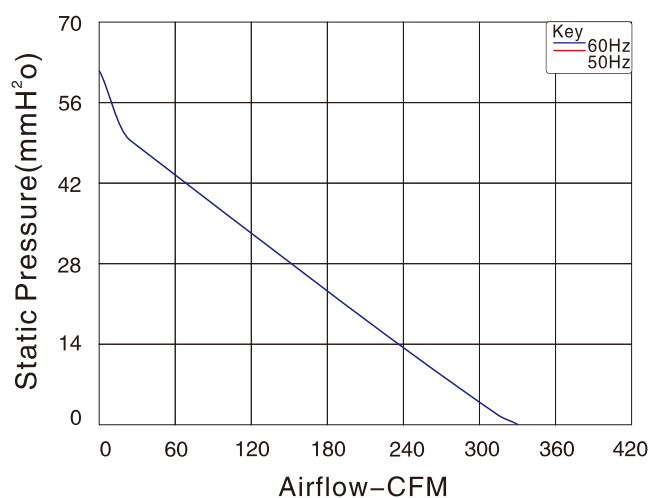

尺寸 Size: Ø180mmX69mm
 风量 Airflow: 340CFM
 噪音 Noise: 61dB(A)
 风叶 Impeller Material: ABS+GF
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH180AGA2-A01	230	50/60	0.45	58	2800	340	62.7	61

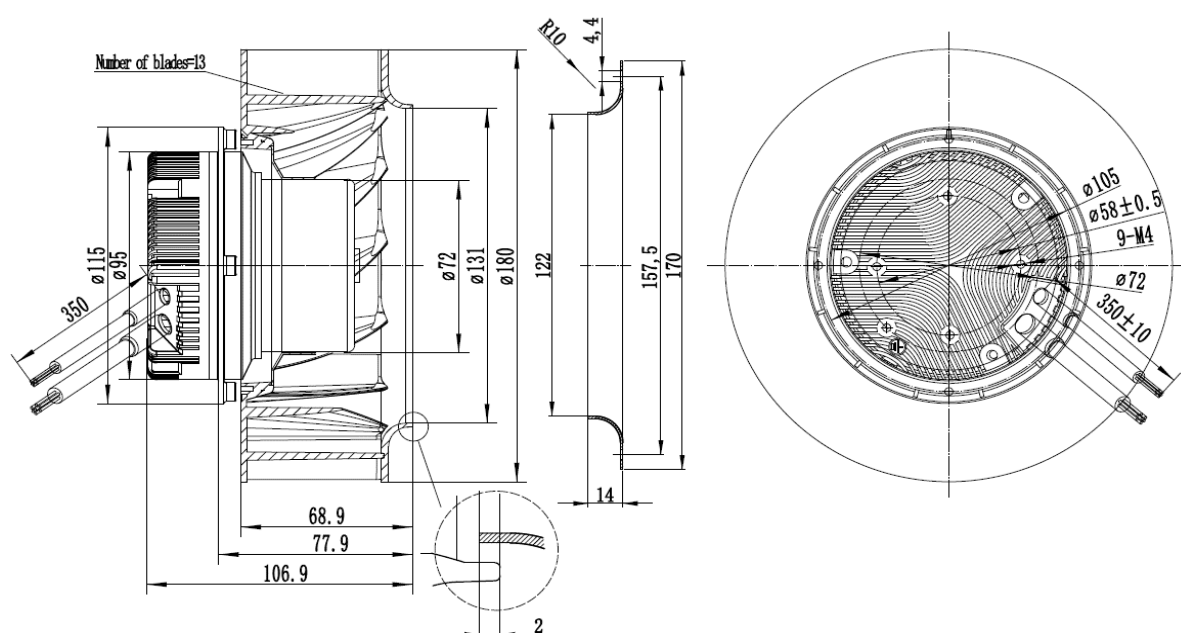


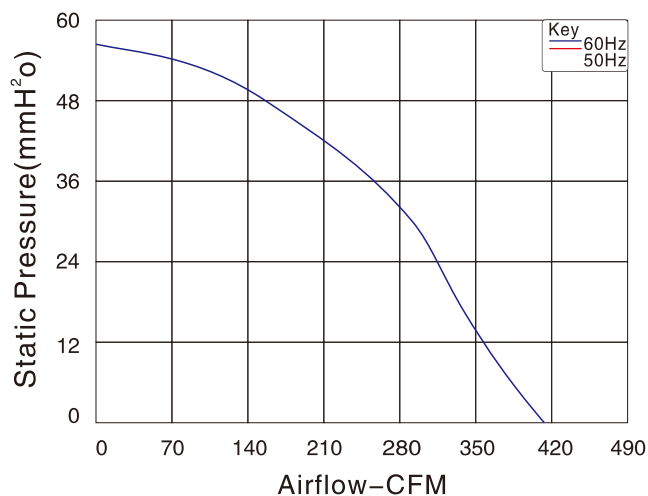

尺寸 Size: Ø190mmX61mm
风量 Airflow: 414.8CFM
噪音 Noise: 66.7dB(A)
风叶 Impeller Material: PA66
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH190BGA2-A01	230	50/60	0.63	85	3400	414.8	56.5	66.7

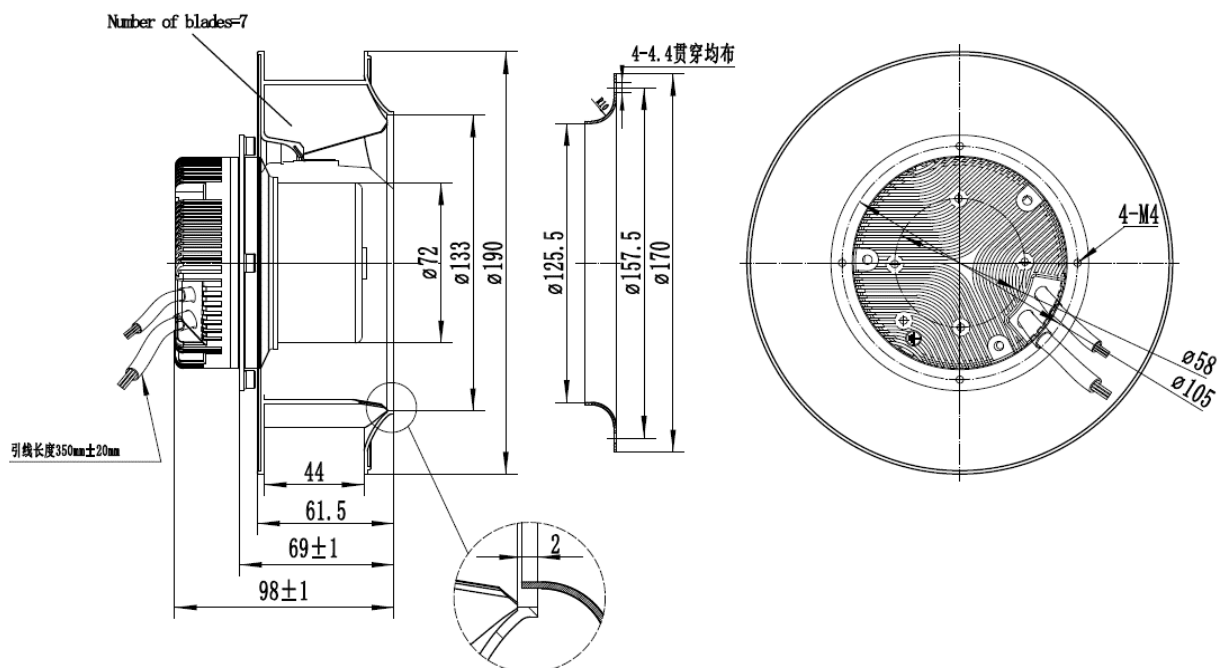

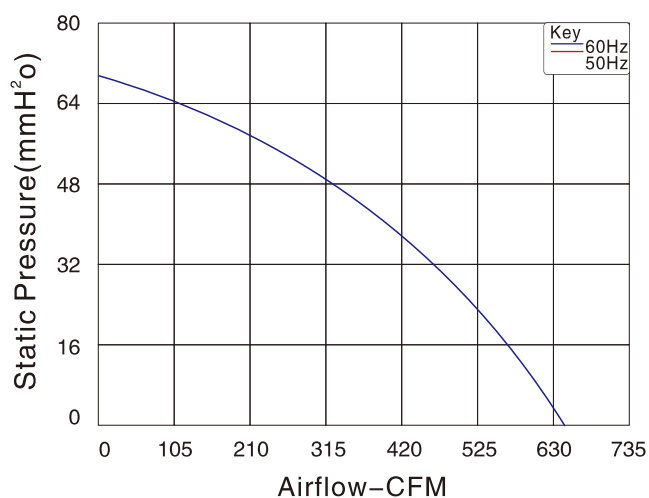

尺寸 Size: Ø220mmX65mm
 风量 Airflow: 645.5CFM
 噪音 Noise: 77.2dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH220AGA2-A01	230	50/60	0.55	170	3100	645.5	70	77.2

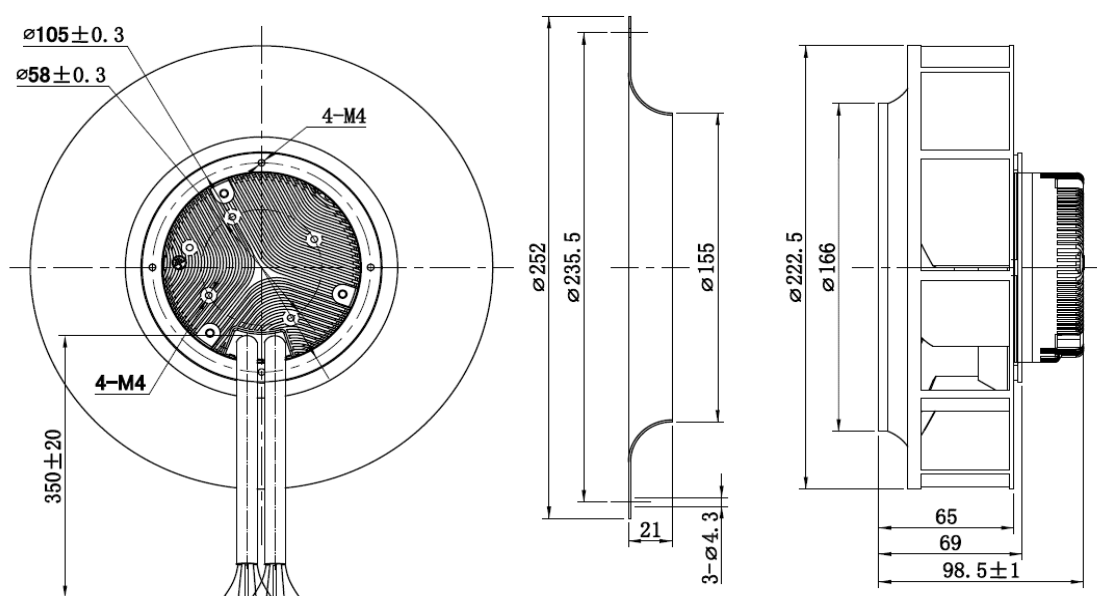

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS



UL
E248719




CE

本样册仅供参考，具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压，请向制造商索取。本公司保留技术改动的权利。
Special voltage may be provided (according to the request) along a technical modification right reserved.


[Http://www.xtgygs.cn](http://www.xtgygs.cn)




尺寸 Size: Ø220mmX93mm
风量 Airflow: 597.4CFM
噪音 Noise: 65.4dB(A)
风叶 Impeller Material: ABS+GF
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"

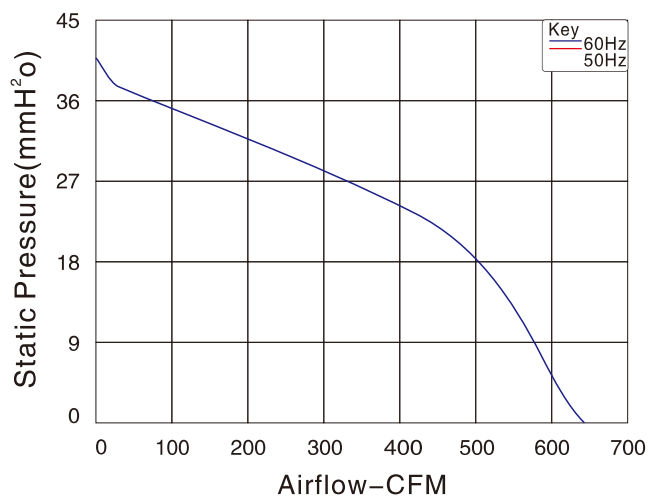


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YE220BGA2-A01	230	50/60	0.58	100	2200	597.4	40.2	65.4

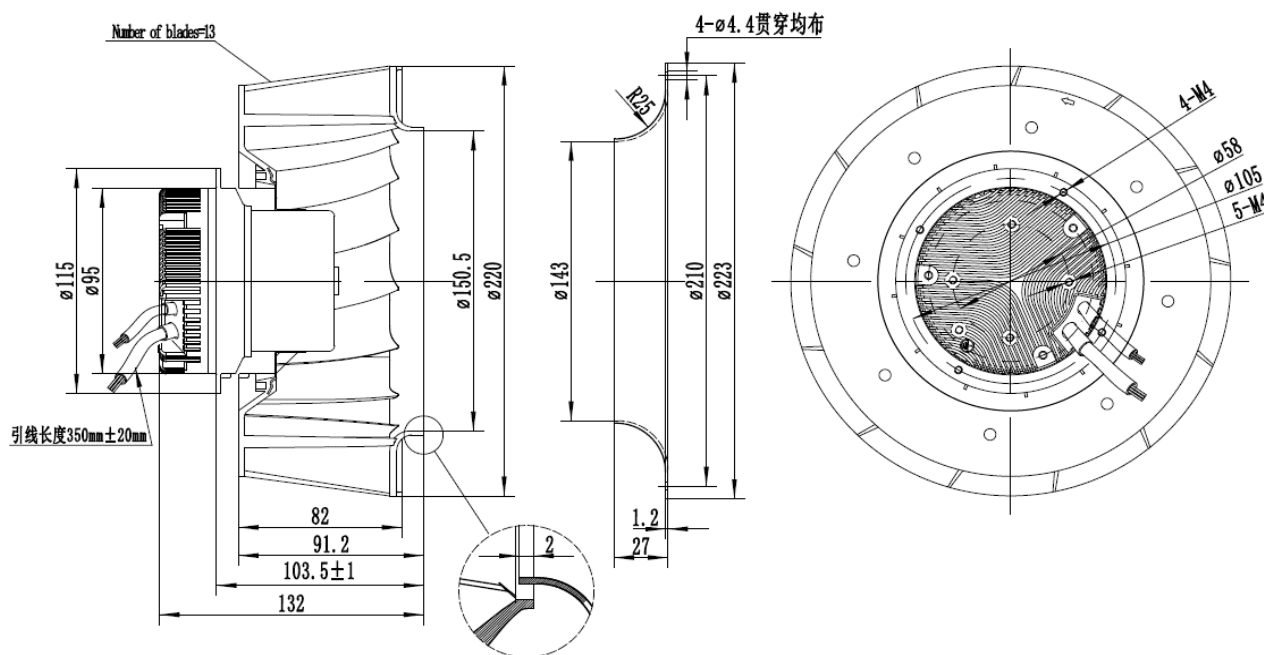

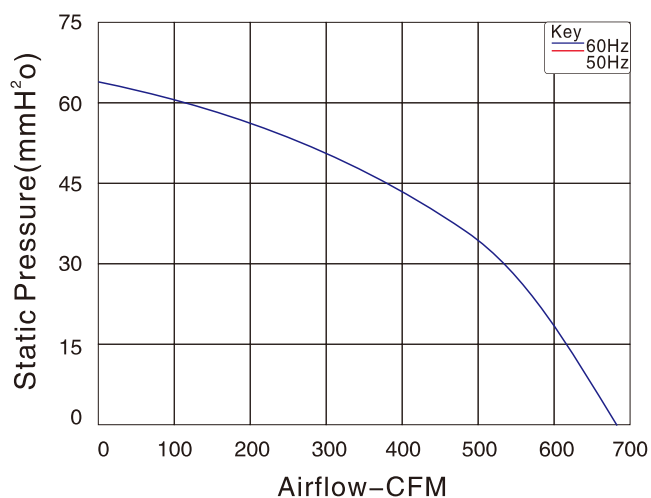

尺寸 Size: Ø225mmX75mm
 风量 Airflow: 683CFM
 噪音 Noise: 73dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10°C~+65°C
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH225BGA2-A01	230	50/60	0.28	85	3000	683	66.3	73

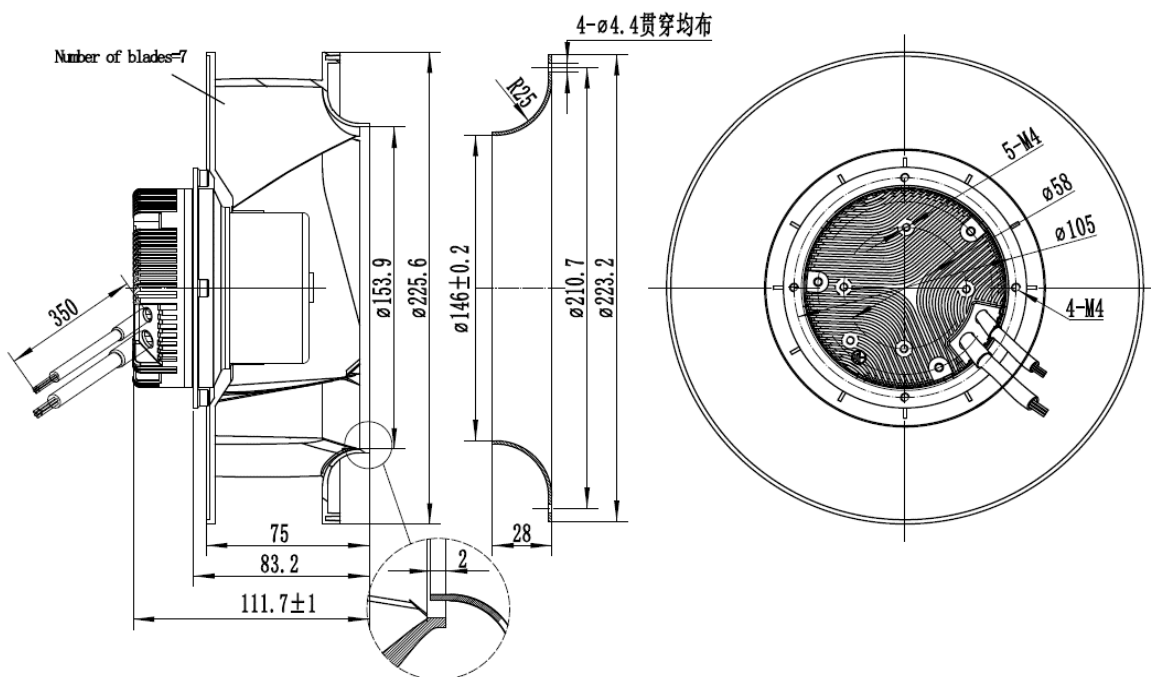

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS




UL
E248719



CE

本样册仅供参考，具体以图纸为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压，请向销售部索取。本公司保留技术改动的权利。
Special voltage may be provided (according to the request) along a technical modification right reserved.

Http://www.xtgygs.cn

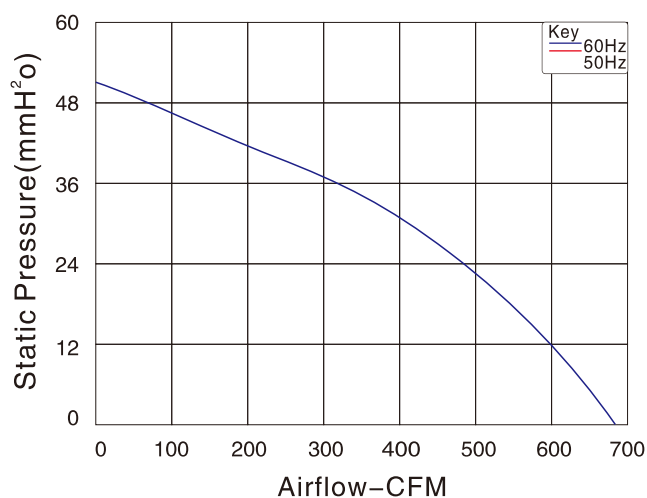

尺寸 Size: Ø225mmX89mm

风量 Airflow: 678.8CFM

噪音 Noise: 68.1dB(A)

风叶 Impeller Material: PA66


工作方式 Operation mode: S1


温度范围 Operating Temperature: -10℃~+65℃

防护等级 Type of protection: IP44

绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH225CGA2-A01	230	50/60	0.55	120	2500	678.8	51.9	68.1

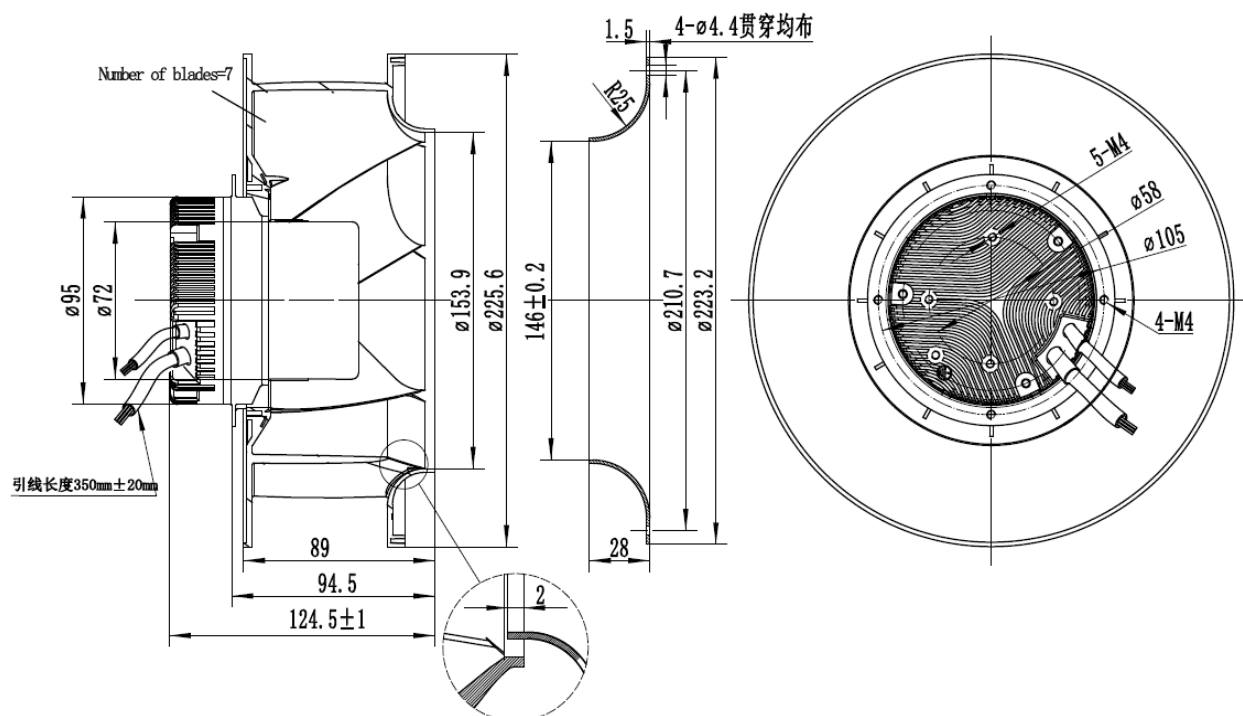

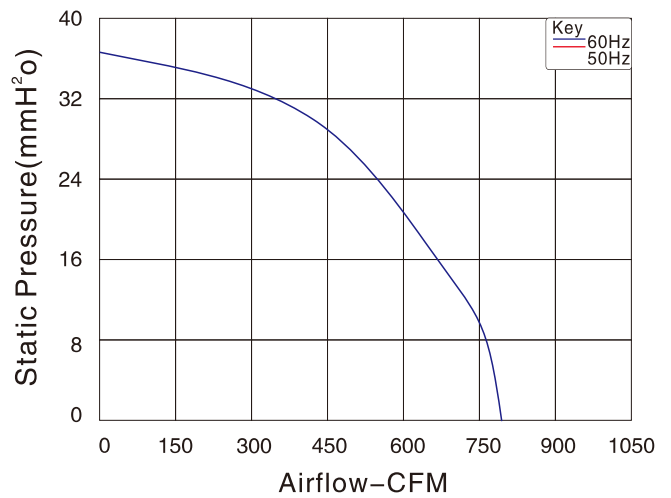

尺寸 Size: Ø225mmX89mm
 风量 Airflow: 814.6CFM
 噪音 Noise: 72.1dB(A)
 风叶 Impeller Material: PA66
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH225CHA2-A01	230	50/60	0.85	140	3000	814.6	74.7	72.1

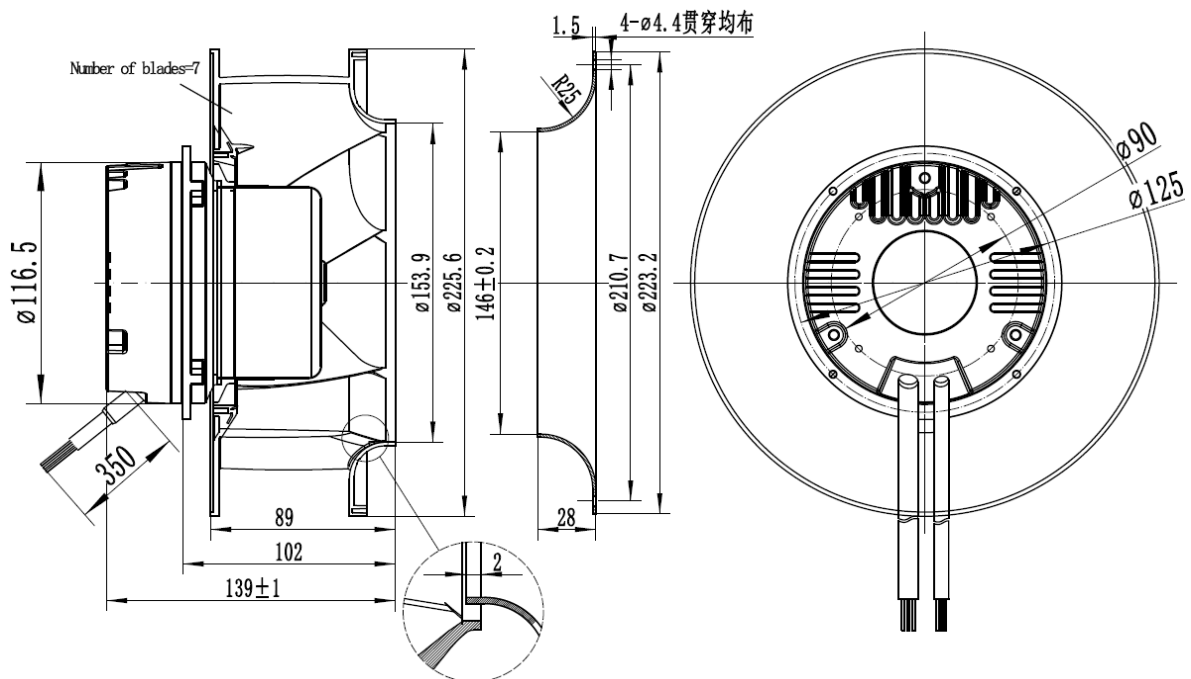

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS




UL
E248719



CE


本样册仅供参考，具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压或特殊规格，本公司保留技术改动的权利。
Special voltage may be provided (according to the request) along a technical modification right reserved.


[Http://www.xtgygs.cn](http://www.xtgygs.cn)

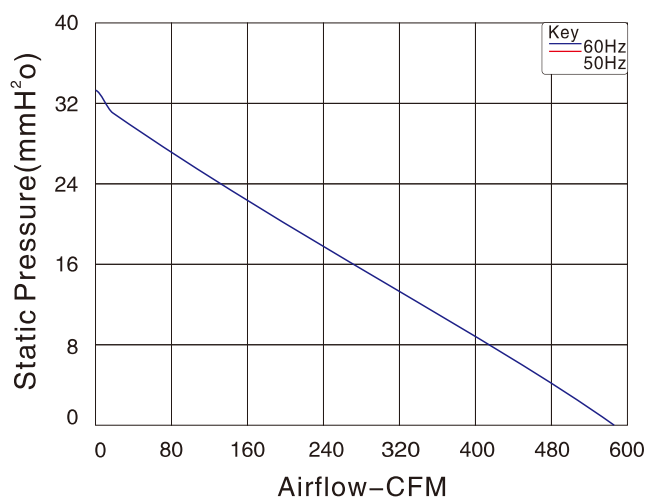

尺寸 Size: 225mmX93mm
风量 Airflow: 543.1CFM
噪音 Noise: 63dB(A)
风叶 Impeller Material: ABS+GF
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YE225DGA2-A01	230	50/60	0.26	80	2000	543.1	33.2	63

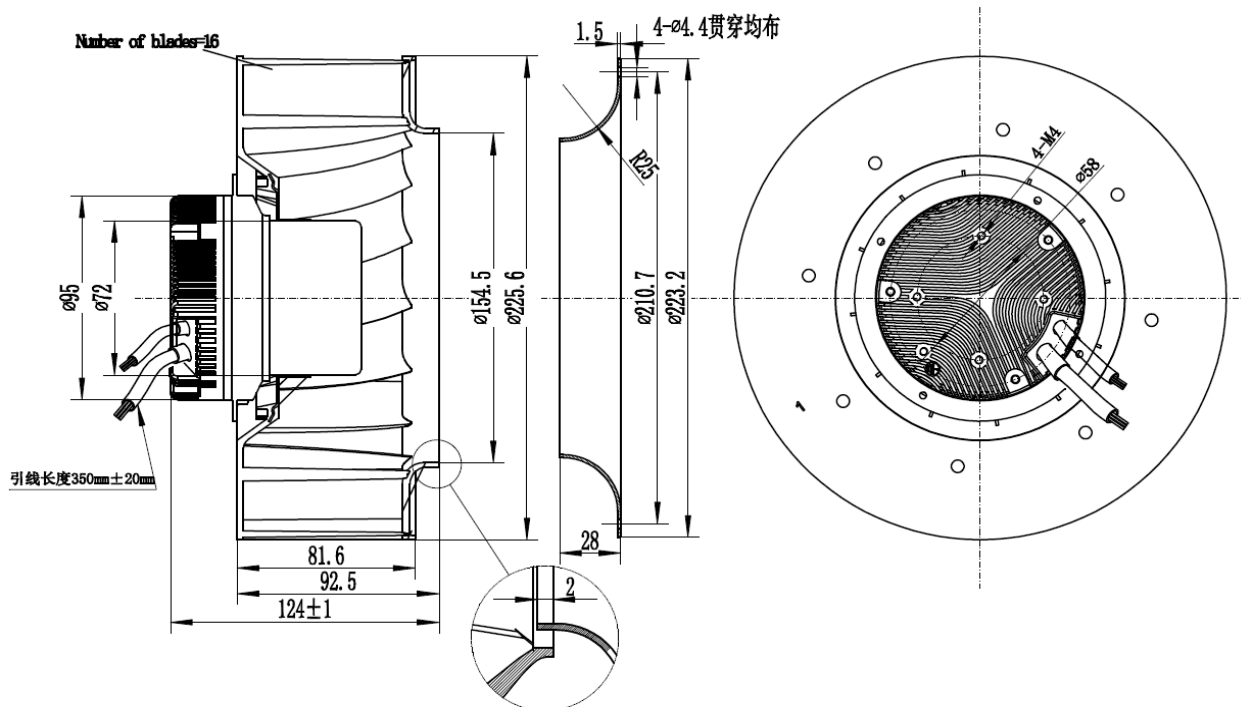

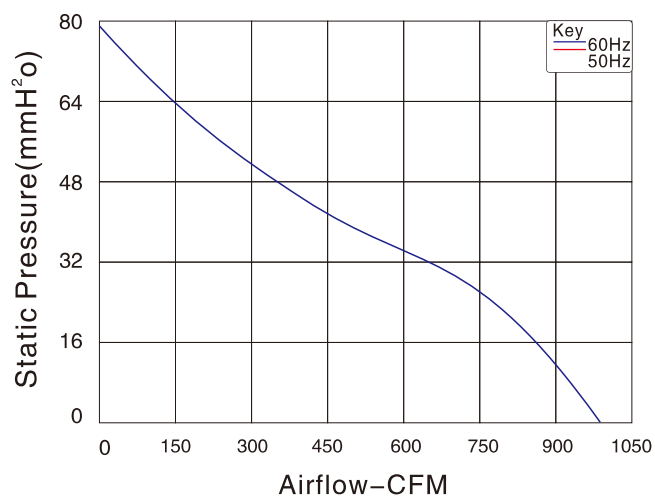

尺寸 Size: Ø250mmX81mm
 风量 Airflow: 985.4CFM
 噪音 Noise: 78.1dB(A)
 风叶 Impeller Material: Metal
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10°C~+65°C
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH250AHA2-A01	230	50/60	0.9	180	3000	985.4	78.7	78.1

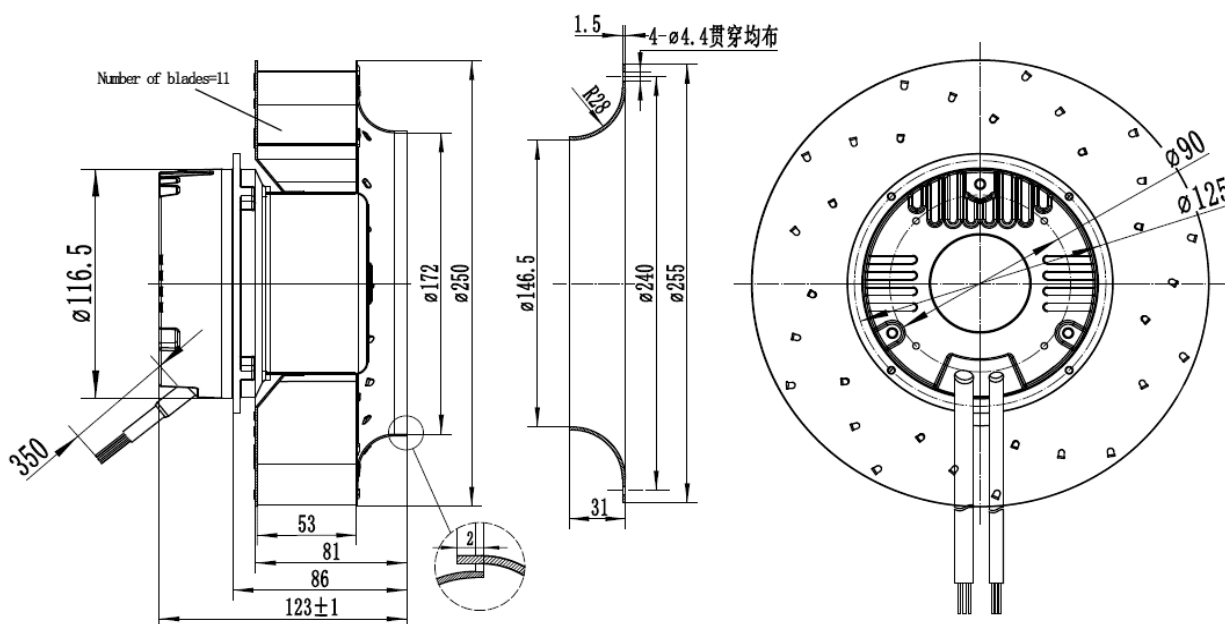

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS




UL
E248719



CE


本样册仅供参考, 具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如有特殊要求, 请向本公司索取。本公司保留技术改动的权利。
Special voltage may be provided if necessary (according to the request). Along it technical modification rights reserved.


Http://www.xtgygs.cn

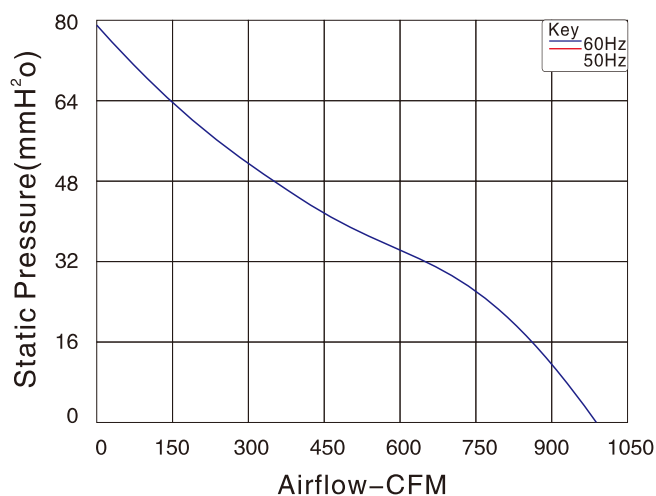

尺寸 Size: 250mmX86mm
风量 Airflow: 985.4CFM
噪音 Noise: 78.1dB(A)
风叶 Impeller Material: PA66
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YE250BHA2-A01	230	50/60	0.9	170	3000	985.4	78.7	78.1

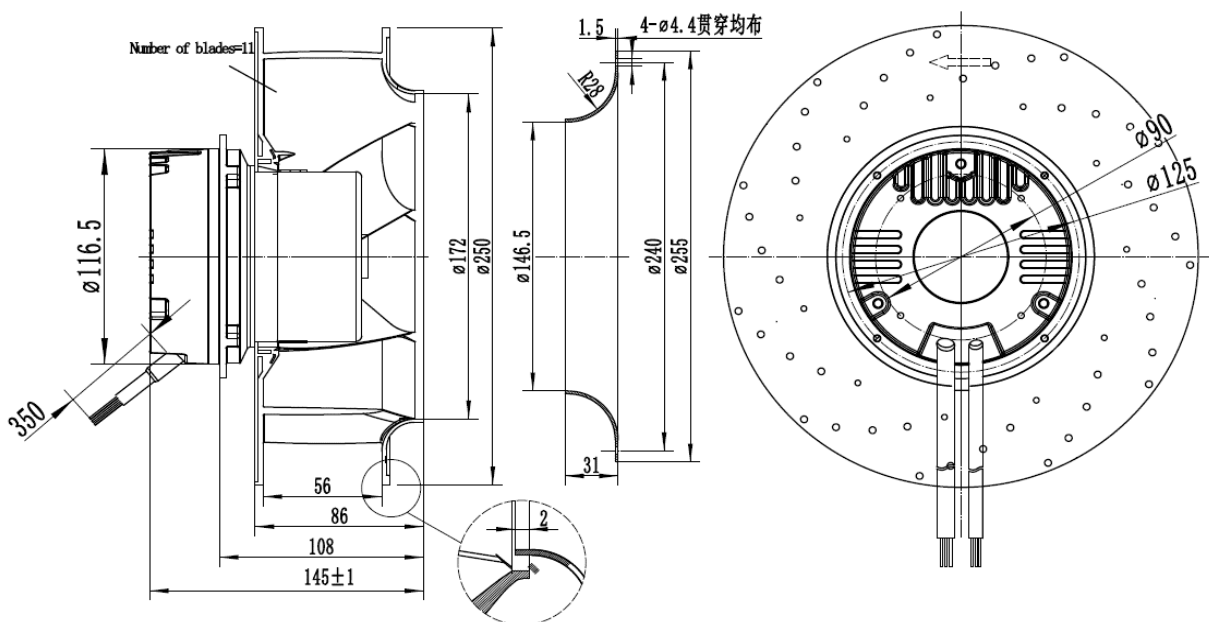

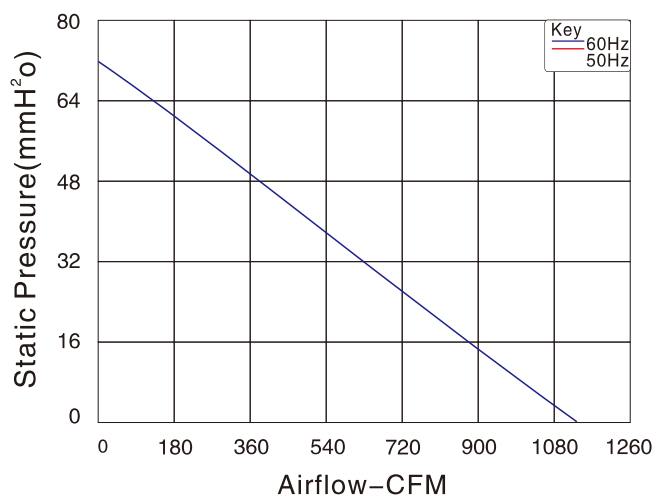

尺寸 Size: Ø280mmX81mm
 风量 Airflow: 1126CFM
 噪音 Noise: 74.6dB(A)
 风叶 Impeller Material: Metal
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH280AHA2-A01	230	50/60	0.85	150	2500	1126	71.5	74.6

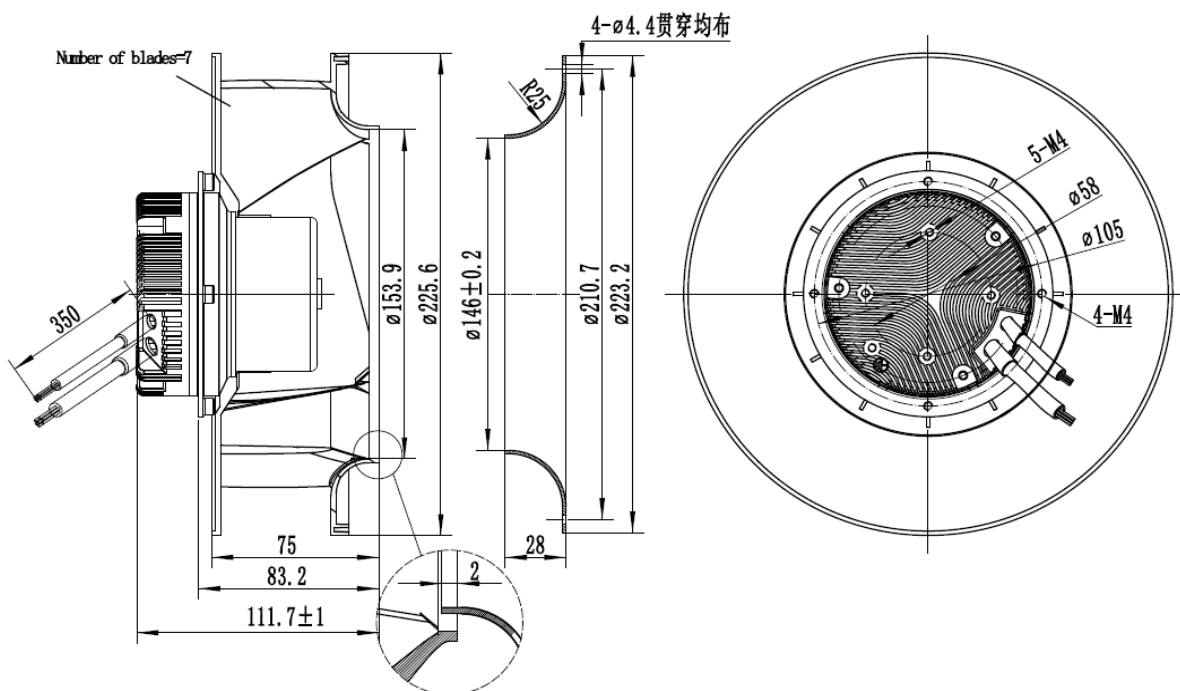

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC/DC FANS COOLING FANS




UL
E248719



CE


本样册仅供参考, 具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压, 请向销售商索取。本公司保留技术改动的权利。
Special voltage may be provided if necessary (according to the request). Along it technical modification rights reserved.


[Http://www.xtgygs.cn](http://www.xtgygs.cn)

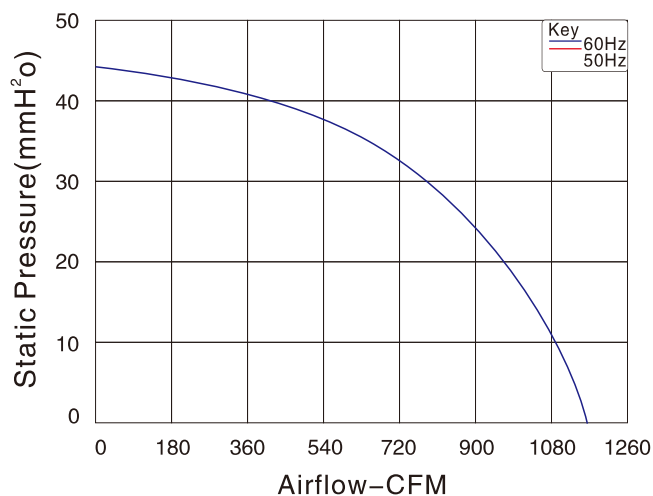

尺寸 Size: 280mmX112mm
风量 Airflow: 1167CFM
噪音 Noise: 45dB(A)
风叶 Impeller Material: Metal
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"


产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YE280BHA2-A01	230	50/60	0.8	130	2000	1167	45	70.2

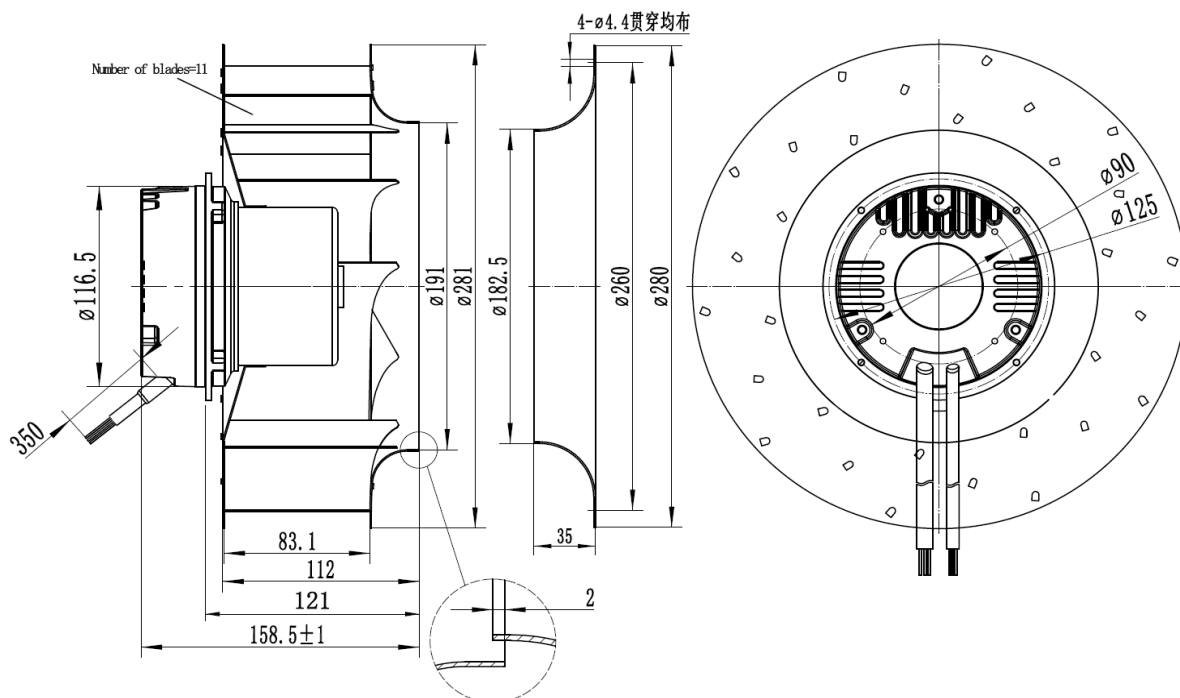

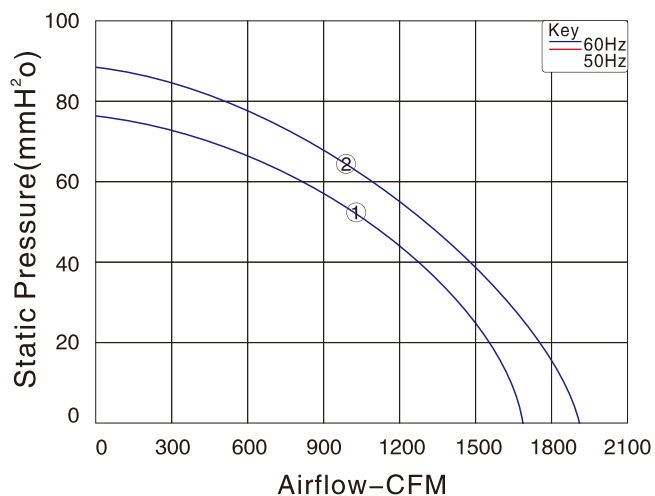

尺寸 Size: 320mmX108mm/140mm
 风量 Airflow: 1579CFM/1928CFM
 噪音 Noise: 72.9dB(A)/75.9dB(A)
 风叶 Impeller Material: Aluminium
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH320AIA2-A01 ①	230	50/60	1.4	300	2200	1579	77	72.9
YEH320BIA2-A01 ②	230	50/60	1.45	320	2200	1928	89.4	75.9

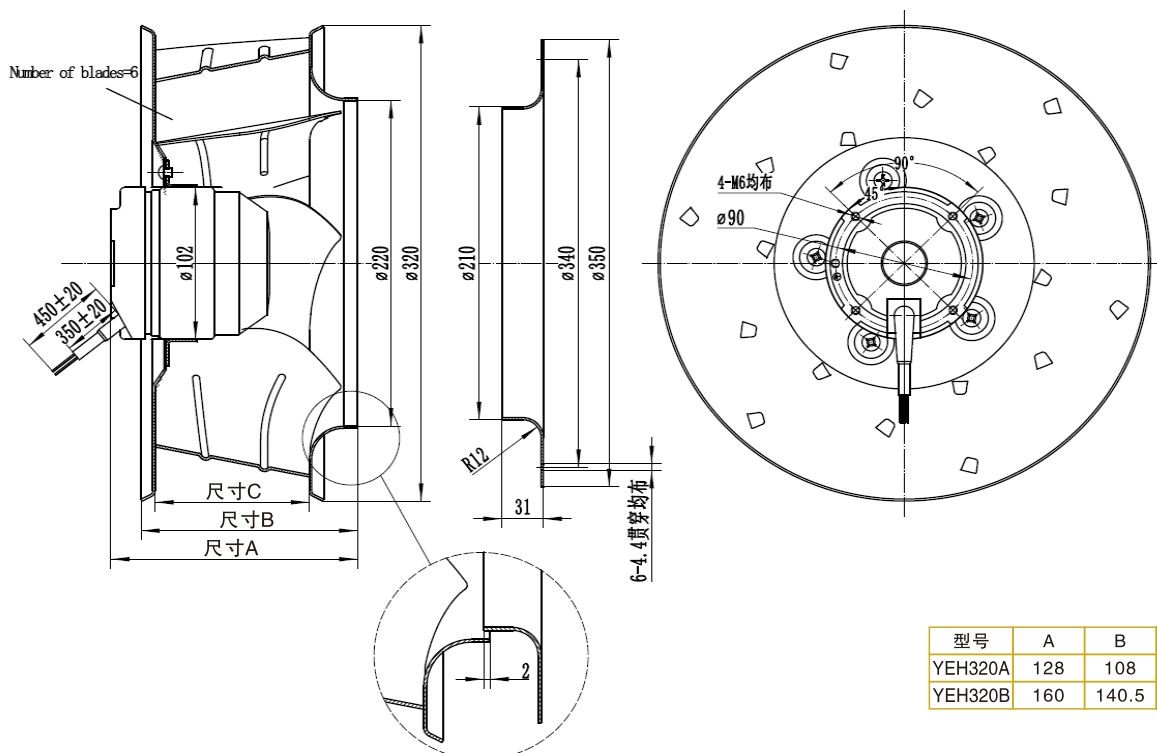

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件




JULONG MOTOR
AC DC FANS COOLING FANS



UL
E248719




CE

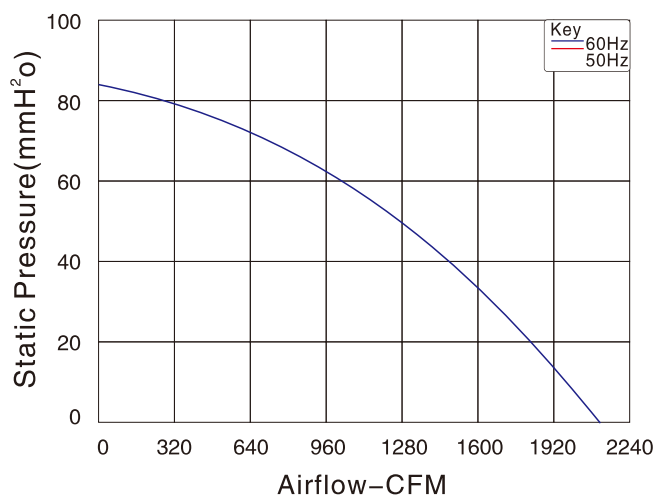


尺寸 Size: Ø335mmX147mm
 风量 Airflow: 2122CFM
 噪音 Noise: 73.4dB(A)
 风叶 Impeller Material: Aluminium
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10℃~+65℃
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH335AIA2-A01	230	50/60	1.5	330	1900	2122	84.3	73.4

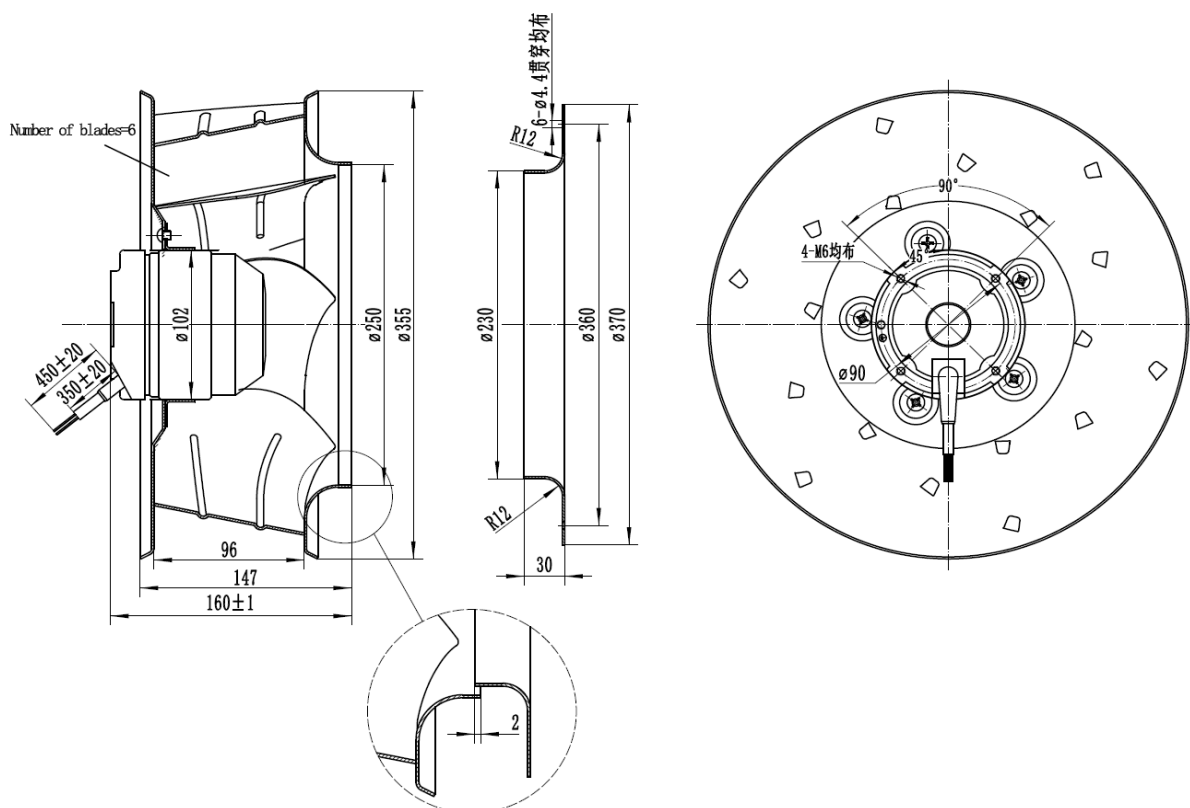


本样册仅供参考，具体以图纸为准。
 This sample book is for reference only. Please refer to the specification for details.
 如需特殊电压或特殊频率，本公司保留技术权利。
 Special voltage may be provided (according to the request) along a technical modification right reserved.

Http://www.xtgygs.cn

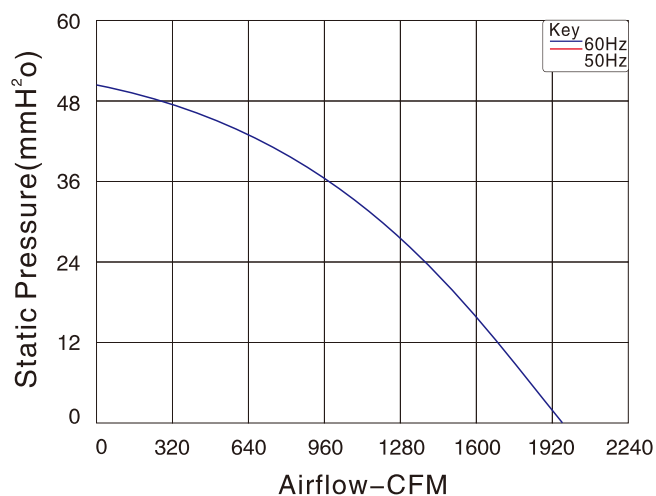

尺寸 Size: 400mmX140mm
 风量 Airflow: 1943CFM
 噪音 Noise: 68dB(A)
 风叶 Impeller Material: Aluminium
 工作方式 Operation mode: S1
 温度范围 Operating Temperature: -10°C~+65°C
 防护等级 Type of protection: IP44
 绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YEH400AIA2-A01	230	50/60	1.1	245	1450	1943	51	68

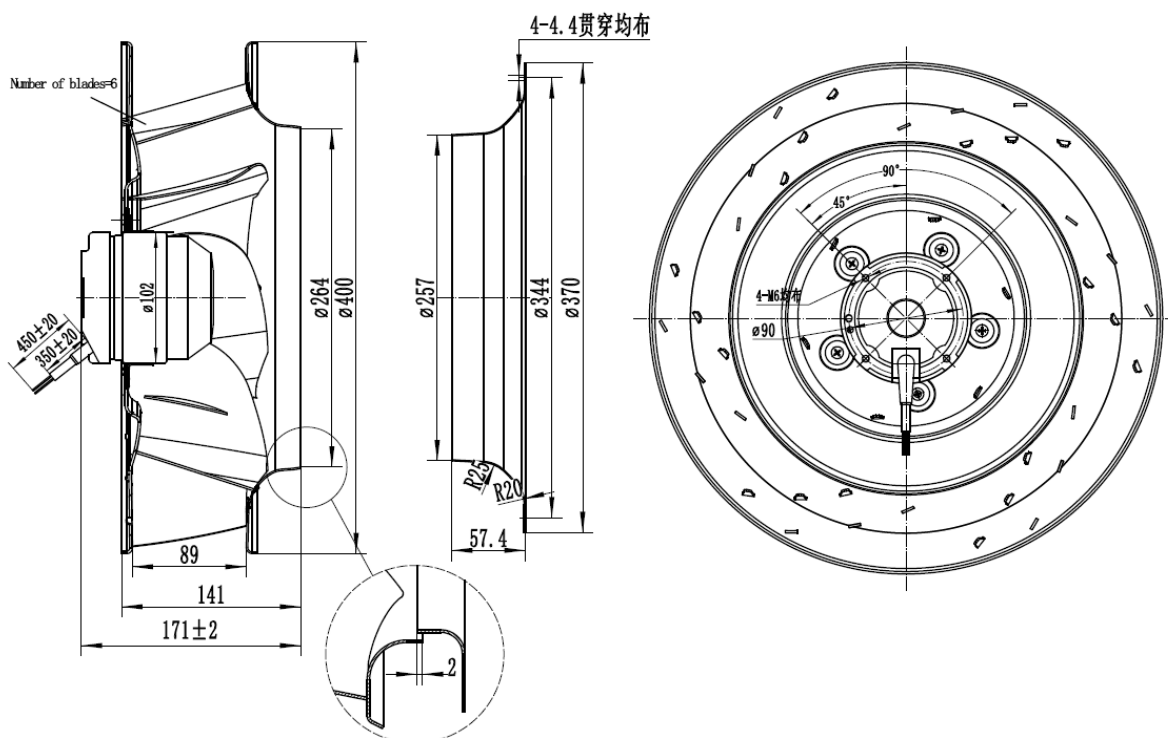

AC Axial Fan
AC轴流风机

AC All-Metal Axial Fan
AC全金属轴流风扇

DC Axial Fan
DC轴流风机

DC Centrifugal Fan
DC离心风机

EC Axial Fan
EC轴流风机

EC Centrifugal Fan
EC离心风机

AC Centrifugal Fan
AC离心风机

Fan Accessories
风机配件



JULONG MOTOR
AC DC FANS COOLING FANS




UL
E248719



CE

本样册仅供参考, 具体以说明书为准。
This sample book is for reference only. Please refer to the specification for details.
如需特殊电压, 请向销售商索取。本公司保留技术改动的权利。
Special voltage may be provided (according to the request) along a technical modification right reserved.

Http://www.xtgygs.cn

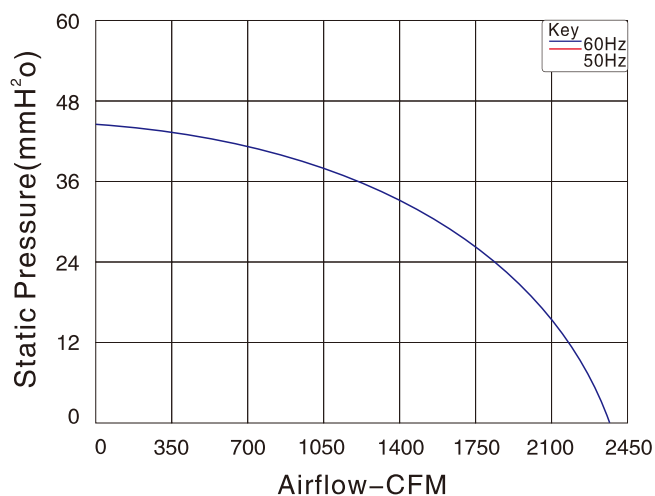

尺寸 Size: 400mmX188mm
风量 Airflow: 2355CFM
噪音 Noise: 68dB(A)
风叶 Impeller Material: Aluminium
工作方式 Operation mode: S1
温度范围 Operating Temperature: -10℃~+65℃
防护等级 Type of protection: IP44
绝缘等级 Insulation class: "B"

产品型号 Model	电压 Voltage VAC	频率 Freq. Hz	电流 Current A	功率 Power W	转速 Speed RPM	风量 Air Flow CFM	静压 Static Pressure mmH ₂ O	噪音 Noise dB(A)
YE400BIA2-A01	230	50/60	1.5	320	1350	2355	44.8	68

