



双面带防尘盖式 标准型

微型深沟球轴承

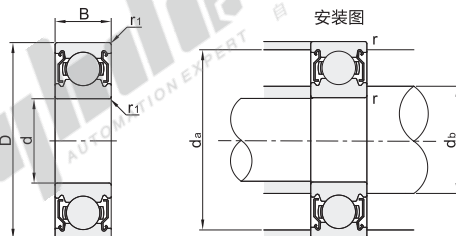

- ① 不承诺品牌。
② 基本额定负载/容许转速/重量值不适用于SUS304和SUS420材质。



型号		d	D	B	r1 (min)	基本额定负载(N)		极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		d _{min} (d ₀)	d _a (max)	r (max)	
BAF	682ZZ	2	5	2.3	0.08	80	51740000	2.8	4.2	0.08	0.13	
	692ZZ		6	3	0.15	150	89670000	3.2	4.8	0.31		
	602ZZ		7	3.5	0.15	150	12562000	3.1	5.8	0.54		
	682AZZ	2.5	6	2.6	0.08	80	73650000	3.2	4.8	0.08	0.22	
	692AZZ		7	3.5	0.15	150	96590000	3.7	5.8	0.15	0.43	
	673ZZ		6	2.5	0.08	80	94600000	3.6	5.4	0.08	0.2	
	683ZZ	3	7	3	0.1	100	13058000	3.9	5.8	0.1	0.33	
	693ZZ		8	4			18054000	6.8			0.61	
	603ZZ		9	5	0.15	150	21950000	4.2	7.8	0.15	0.92	
	623ZZ	4	10	4			22450000	8.8			1.6	
	633ZZ		13	5	0.2	1301	48840000	4.6	11.4	0.2	3.43	
	674ZZ		7	2.5	0.08	222	8860000	6.4	0.08	0.28	0.8	
	684ZZ	5	9				22449000	5	7.8	0.1	0.76	
	694ZZ		11	4	0.15	150	27645000	5.2	9.8	0.15	2	
	604ZZ		12		0.2	200	36043000	5.6	10.4	0.2	2.3	
	624ZZ	6	13	5			49042000	6	11.4	0.2	3.5	
	634ZZ		16		0.3	300	68037000	6	14	0.3	5.1	
	675ZZ		8	2.5	0.08	80	91490000	5.6	7.4	0.08	0.32	
	685ZZ	7	11	5	0.15	150	28243000	6.2	9.8	0.15	1.1	
	695ZZ		13	4	0.2	200	43040000	6.6	11.4	0.2	2.4	
	605ZZ		14				50539000	6	12.4	0.2	3.5	
	625ZZ	8	16	5			68037000	7	17	0.3	4.8	
	635ZZ		19	6	0.3	300	88534000	7	17	0.3	8	
	676ZZ		10	3	0.1	496	21845000	7.04	9.3	0.1	0.7	
	686ZZ	9	13	5	0.15	1080	44039000	7	11.8	0.2	1.9	
	696ZZ		15	5	0.2	1350	53037000	7.6	13.4	0.2	3.8	
	606ZZ		17				2190865380000	15			6	
	626ZZ	10	19	6	0.3	2340	88534000	8	17	0.3	8.1	
	636ZZ		22	7			33331423300000	20			14.5	
	687ZZ		14	5	0.15	1170	50537000	8.2	12.8	0.2	2.1	
	697ZZ	11	17				161071535000	15			5.2	
	607ZZ		19	6	0.3	2240	91034000	9	17	0.3	8	
627ZZ	22		7			33501400320000	20			13		
678ZZ	12	12	3.5	0.1	543	27440000	8	11.33	0.1	0.99		
688ZZ		16	5	0.2	1610	140035000	9.6	14.4	0.2	3.1		
698ZZ		19	6			199086533000	17			7.3		
608ZZ	13	22	7	0.3	3350	140032000	20			12		
628ZZ		24	8			40001590310000	10	22	0.3	17		
638ZZ		28	9			4560198328000	26			30.3		
689ZZ	14	17	5	0.2	1720	82033000	10.6	15.4	0.2	3.2		
699ZZ		20	6			2480109032000	11	18		8.2		
609ZZ		24	7	0.3	3400	145031000	22	0.3	14	20		
629ZZ	15	26	8	0.6	4550	196030000	13			20		

① 1KgF=9.81N

型号		d	D	B	r1 (min)	基本额定负载(N)		极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
代码	轴承型号					Cr(动)	Cor(静)		d _{min} (d ₀)	d _a (max)	r (max)	
BAF...-SUS BAF07...-SUS	682ZZ	2	5	2.3	0.08	143	40	85000	2.7	3.9	0.08	0.17
	692ZZ		6	3	0.15	281	79	75000	3	4.8	0.15	0.38
	602ZZ		7	3.5		328	102	60000	3.2	5.8		0.58
	682AZZ	2.5	6	2.6	0.08	178	59	71000	3.7	4.9	0.08	0.29
	692AZZ		7	3.5	0.15	328	102	63000	3.85	5.65	0.15	0.55
	673ZZ		6	2.5	0.08	242	94	71000	3.6	5.4	0.08	0.2
	683ZZ	3	7	3	0.1	390	130	63000	3.9	5.8	0.1	0.45
	693ZZ		8	4	560	180	60000	6.8			0.61	
	603ZZ		9	5	0.15	571	189	56000	4.2	7.8	0.15	1.13
	623ZZ	4	10	4	640	224	50000	8.8			1.6	
	633ZZ		13	5	0.2	1301	488	40000	4.6	11.4	0.2	3.43
	674ZZ		7	2.5	0.08	222	88	60000	6.4	6.4	0.08	0.28
	684ZZ	5	9		0.15	640	224	53000	5	7.8	0.1	1.01
	694ZZ		11	4		715	276	48000	5.2	9.8	0.15	1.8
	604ZZ		12			957	350	5.6	10.4	0.2	2.34	
	624ZZ	6	13	5	0.2	1310	490	40000	5.6	11.4	0.2	3.2
	634ZZ		16	5	0.3	1340	523	36000	6	14	0.3	5.44
	675ZZ		8	2.5	0.1	218	131	53000	5.8	7.4	0.1	0.34
	685ZZ	5	11	5	0.15	175	282	45000	6.2	9.8		1.96
	695ZZ		13	4	0.2	1080	430	43000	6.6	11.4	0.2	2.4
	605ZZ		14	5	1330	505	40000	12.4			3.5	
	625ZZ	6	16	5	0.3	1760	680	36000	7	17	0.3	4.8
	635ZZ		19	6		2336	896	32000	7	17	0.3	8.89
	676ZZ		10	3		0.1	496	218	45000	7.04	9.3	0.1
	686ZZ	7	13	5	0.16	1080	440	40000	7	11.8	0.2	2.69
	696ZZ		15	5	0.2	1350	530	7.6	13.4	0.2	3.8	
	606ZZ		17	6		2190	865	38000	15			6
	626ZZ	8	19	6	0.3	2340	885	32000	8	17	0.3	8.1
	636ZZ		22	7	3333	1423	30000	20			14.5	
	687ZZ		14	5	0.15	1170	505	40000	8.2	12.8	0.15	2.97
	697ZZ	9	17			1610	710	36000	15			5.12
	607ZZ		19	6	0.3	2340	885	9	17	0.3	7.51	
627ZZ	22		7	3300	1370	30000	20			12.9		
678ZZ	8	12	3.5	0.1	543	274	40000	8	11.33	0.1	0.99	
688ZZ		16	5	0.2	1610	715	36000	9.6	14.4	0.2	4.02	
698ZZ		19	6	1990	865	17			7.3			
608ZZ	9	22	7	0.3	3350	1400	34000	10	20	0.3	12	
628ZZ		24	8	4000	1590	22			17			
638ZZ		28	9	4560	1983	26			30.3			
689ZZ	9	17	5	0.2	1720	820	33000	10.6	15.4	0.2	3.2	
699ZZ		20	6	0.3	2480	1090	32000	11	18		8.2	
609ZZ		24	7	3400	1450	31000	22	0.3	14			
629ZZ		26	8	0.6	4550	1960	30000	13			20	

① SUS304材质仅适用带*规格。

① 1KgF=9.81N



请按图示订货

型号	代码	轴承型号	d
682ZZ	BAF	692ZZ	2
602ZZ		602ZZ	

BAF682ZZ



未税价(元)

数量	1~9	10~
价格	100%	另行报价



交货期

5



Example
使用示例



① 深沟球轴承装配在导向块上, 对其他工件起到导向的作用。