

代码	类型	固定侧	材质		表面处理
			① ③ ⑥	④	① ③ ④ ⑥
LEC41	精密型	固定侧	S45C	SUJ2	发黑


- ① ② ③ ④ 为一体，请勿拆解，否则将影响精度。
 ① 轴承已经封入适量锂皂基抗极压润滑脂。
 ① 使用经预压调整后的JIS 5级的角接触球轴承、最适用于高精度、高速旋转用途。

构成零件


编号	零件名称	数量
①	轴承座本体	1
②	角接触轴承 5级	1对
③	轴承盖	1
④	间隔环	2
⑤	内六角紧定螺丝附铜片	2
⑥	支座用螺母	1
⑦	油封(Ø8以下1个)	2




d6~8

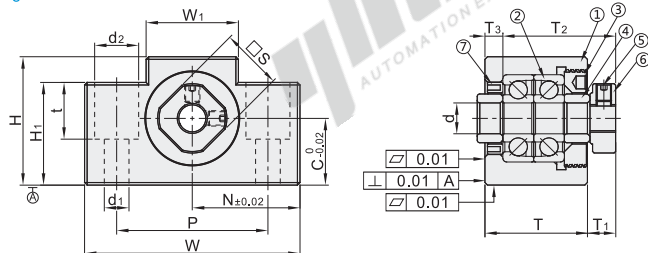


d10~15

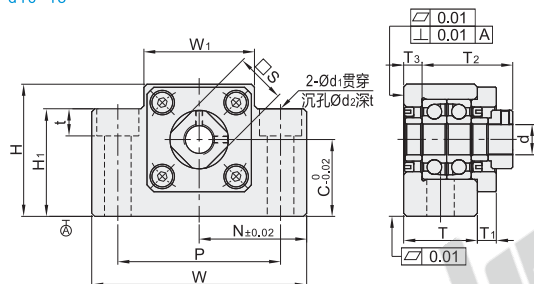


d20

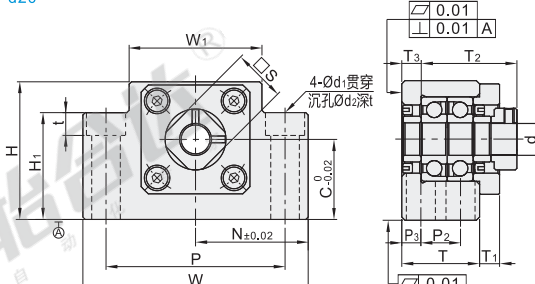

d25

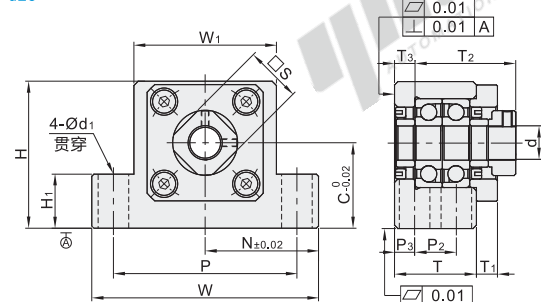

建议轴端加工尺寸

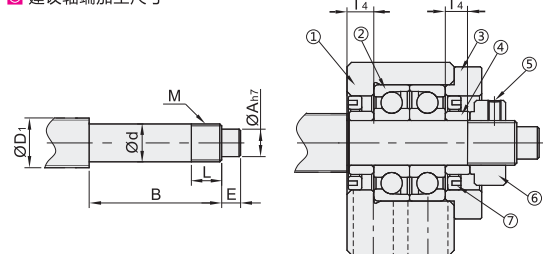

型号		建议轴端加工尺寸																											
代码	规格	Ød	T	T ₁	T ₂	T ₃	W	H	C	W ₁	H ₁	P	N	P ₂	P ₃	Ød ₁	Ød ₂	t	S	油封 适用 轴径	搭配丝杠轴径	轴端部外径	轴端部加工尺寸			公称螺纹		间隔环长度	
		ØD ₁	Ød	ØA	B	E	M	L	T ₄																				
LEC41	6	6	20	5.5	22	3.5	42	25	13	18	20	30	21			5.5	9.5	11	12	9.4	8	6 ^{+0.001 -0.006}	4.5	29.5	8	M6×P0.75	8	5	
	8S	8	23	7	26	4	52	32	17	25	26	38	26			6.6	11	12	14	9.8	10/12	8 ^{+0.002 -0.008}	6	32	10	M8×P1.0	10		
	8																			11.4									
	10S	10													—	—				11.8								5.5	
	10	24		29.5	6	70	43	25	36	35	52	35				9	14	11	16	14.4	12/14/15	10 ^{+0.002 -0.008}	8	35	15	M10×P1.0	11		
	12	12		6																19	15.4	14/15/16	12 ^{+0.003 -0.011}	10		M12×P1.0			
	15	15	25		36	5	80	49		41	40	60	40							22	19.4	18/20	15 ^{+0.003 -0.011}	12	49	20	M15×P1.0	13	10
	20	20	42	10	50	10	95	58	30	56	45	75	47.5	22	10	11	17	15	30	25.4	25/28/30	20 ^{+0.003 -0.012}	15	61	27	M20×P1.0	17	11	
25	25	48	13	60	14	105	68	35	66	25	85	52.5	30	9	11	—	—	35	31.4	30/32/36	25 ^{+0.005 -0.014}	20	75	33	M25×P1.5	22	15		



代码	规格	Ød
LEC41	6	6
	8	8

LEC41 — 6



优惠价
数量 1~4 5~
价格 100% 另行报价

未报价(元)



交货期
5