

平皮带用滑轮


带肋槽直柱型

L=40~100


代码	类型	材质	表面处理
ENE11	带肋槽直柱型	铝合金	喷细砂本色阳极氧化

3D模型仅供参考，具体尺寸请以参数表为准，注意选型。

圆孔+螺孔型

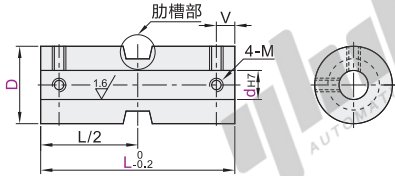

肋槽部




RoHS

键槽尺寸 N: 新JIS(B1301)键槽尺寸表


NH7	bJS9	t
8	3	1.4
10	±0.015	±0.0125
K10	4	1.8
12	±0.018	±0.0150
15	5	2.3
20	6	2.8
25	±0.021	±0.0180
30	8	3.3
		±0.2

键槽孔+螺孔型

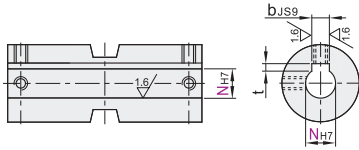

平皮带导条形状与滑轮肋槽避让尺寸参考图

平皮带导条形状 滑轮肋槽避让尺寸



其它规格尺寸请参考F4平皮带资料。

视角标准：第一视角

圆孔+螺孔型

型号 代码	D	dH7	最小单位1			最小单位0.1			M	V
			L	X	Y	Z				
ENE11	30	8				4.0~7.0			M3	
		10				4.0~6.0				
		12								
	35	12							M4	3.5
		15								
		12								
	40	15								
		20	40~100	7.0~15.0	5.0~12.0					
		15				4.0~7.0				
	50	20							M5	4
		25								
		20								
	60	25							M6	4.5
		30								
		25								
80	30							M8	6	
	35									

键槽孔+螺孔型

型号 代码	D	NH7	最小单位1			最小单位0.1			M	V
			L	X	Y	Z				
ENE11	30	8				4.0~7.0			M3	
		10 K10				4.0~6.0				
		12								
	35	12							M4	3.5
		15								
		12								
	40	15							M4	
		20	D≤50时	7.0~15.0	5.0~12.0					
		15	40~100							
	50	20							M5	4
		25	D=60/80时			4.0~7.0				
		20	60~100							
	60	25							M6	4.5
		30								
		25								
80	25							M6	6	
	30									

键槽孔+螺孔型

型号 代码	D	NH7	最小单位1			最小单位0.1		
			L	X	Y	Z		
ENE11	30	10	40~100	7.0~15.0	5.0~12.0	4.0~7.0		

ENE11 - D30 - N8 - L80 - X10 - Y6 - Z5



优惠价

数量	1~9	10~20
价格	100%	另行报价



交货期

5

滑
惰
轮
轮

F8

