

管型导向轴





来图定制



RoHS

导向轴

两端内螺纹带扳手槽型
Y-FCW41

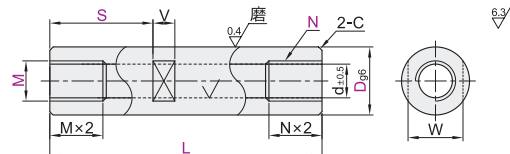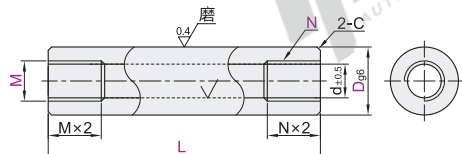

视角标准：第一视角

代码	技术说明																																							
增加2处扳手槽	选型方法 SD12-S8 ① 最小单位1 ② 仅适用Y-FCW31。 <table> <tr> <th>D</th><th>W</th><th>V</th></tr> <tr> <td>6</td><td>5</td><td></td></tr> <tr> <td>8</td><td>7</td><td>8</td></tr> <tr> <td>10</td><td>8</td><td></td></tr> <tr> <td>12</td><td>10</td><td></td></tr> <tr> <td>13</td><td>11</td><td></td></tr> <tr> <td>16</td><td>14</td><td>10</td></tr> <tr> <td>20</td><td>17</td><td></td></tr> <tr> <td>25</td><td>22</td><td></td></tr> <tr> <td>30</td><td>27</td><td>15</td></tr> <tr> <td>35</td><td>30</td><td></td></tr> <tr> <td>40</td><td>36</td><td>20</td></tr> <tr> <td>50</td><td>41</td><td></td></tr> </table>	D	W	V	6	5		8	7	8	10	8		12	10		13	11		16	14	10	20	17		25	22		30	27	15	35	30		40	36	20	50	41	
D	W	V																																						
6	5																																							
8	7	8																																						
10	8																																							
12	10																																							
13	11																																							
16	14	10																																						
20	17																																							
25	22																																							
30	27	15																																						
35	30																																							
40	36	20																																						
50	41																																							
M侧 SD()																																								



数量	1~9	10~
价格	100%	另行报价

型号		L	M-N	S	可选加工 代码
代码	D	最小单位1	选择		
Y-FCW41	16 20	45~1200	12 T2(RC1/4) 16 T3(RC3/8)	根据使用要求指定S尺寸	LC
Y-FCW41—D16— 100—M12—N12—S5— C					