

风扇

◀ EC节能型·AC轴流风扇

代码	类型	材质	轴承	预期寿命
ZHJ10	轴流风扇	AC型	PBT	双滚珠
				70000H(25°C)


特点

- 低功率低耗电，长寿命，寿命70000H；
- 使用范围广，使用电压范围AC110~230V。


CE




外形尺寸：6025H

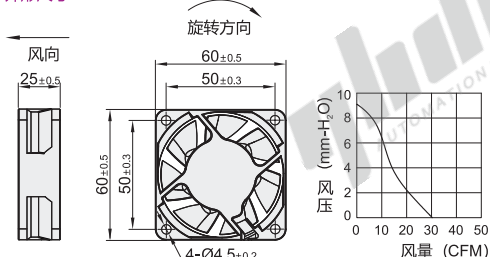


外形尺寸：8025M/8025H

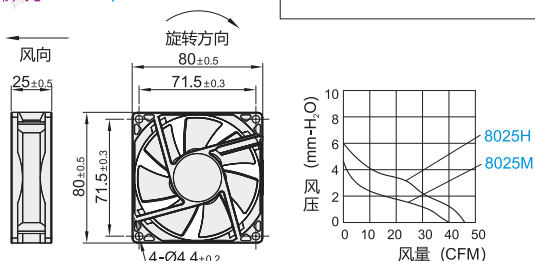


外形尺寸：9225H

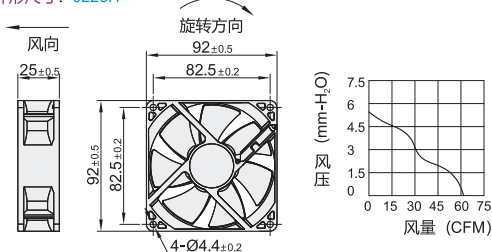


外形尺寸：9238L

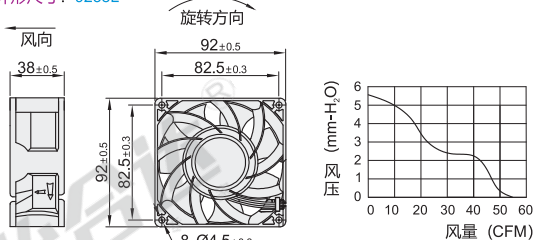


外形尺寸：9238M

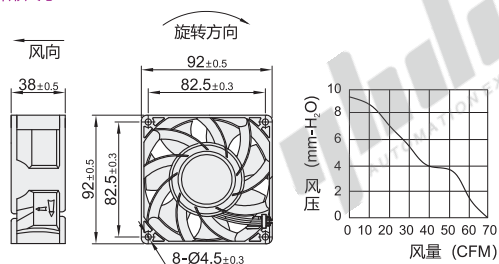


外形尺寸：12025M/12025H

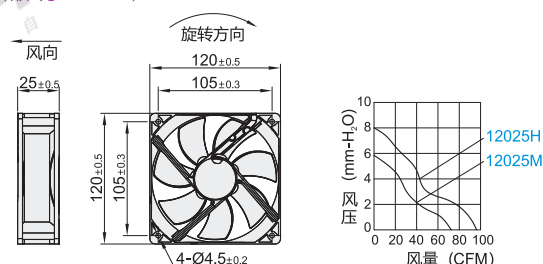


外形尺寸：12038

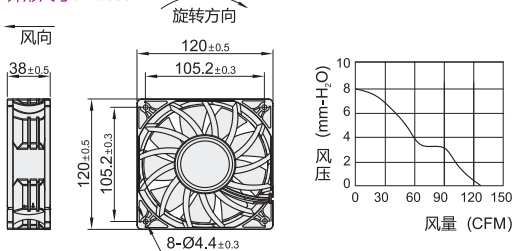


外形尺寸：12038H

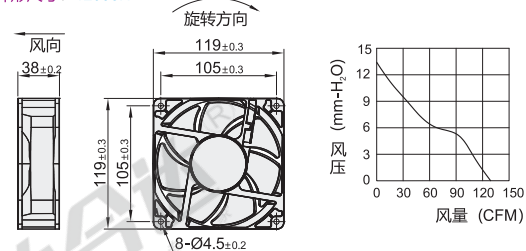

外形尺寸：15050

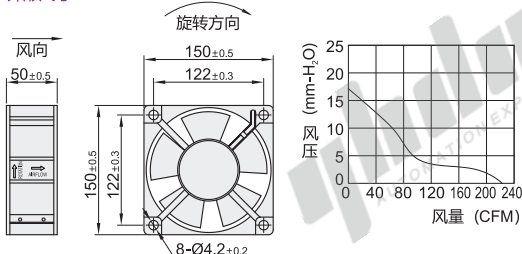

外形尺寸：17251


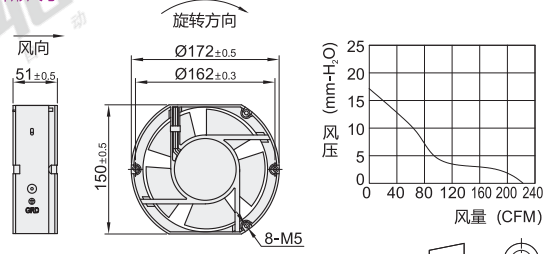


视角标准：第一视角

风扇

◀ EC节能型·AC轴流风扇

外形尺寸：20060

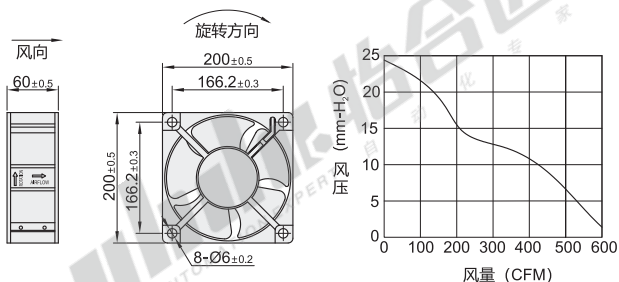

型号		长×宽×高 (mm)	输入电压	频率 (Hz)	电流 (A)	功率 (W)	转速 (RPM)	风量 (CFM)	风压 (mm-H ₂ O)	噪音 (Db[A])	重量 (g)
代码	外形尺寸										
ZHJ10	6025H	60×60×25			0.016	3.5	5200	30.2	9.14	35.2	50
	8025M	80×80×25			0.017	3.8	3500	40.2	4.57	34.5	54
	8025H	80×80×25			0.016	3.5	4000	46.2	5.11	37.5	
	9225H	92×92×25			0.02	4.4	3500	63.9	5.45	43.5	78
	9238L	92×92×38			0.03/0.028	2.7	2700	53.56	5.66	39.2	
	9238M	92×92×38			0.036/0.038	4.2/4.3	3500	69.42	9.25	44.8	196
	12025M	120×120×25	AC220V	50/60	0.019	4.2	2800	73.3	5.90	43.2	125
	12025H	120×120×25			0.025	5.5	3500	93.6	8.15	49.1	
	12038	120×120×38			0.07	7.3	2800	123.71	8.08	51	280
	12038H	120×120×38			0.07	7	3500	138.6	13.17	50.5	290
	15050	150×150×50			0.5	22	3000	220	13.2	51	830
	17251	172×150×51			0.5	22	3000	220	13.2	51	850
20060	200×200×60			0.3	21	2800	610	23	60	1500	



型号	代码	外形尺寸
ZHJ10	9238L	
ZHJ10	9238M	

ZHJ10—9238M