

温度传感器



L型/防射插头 K型热电偶

L型

代码	类型	形状
ZKP09	K型热电偶	L型

特点：可在狭窄的部位使用。

请避免用于运动设备，不可走拖链，如需可选用耐折弯型。

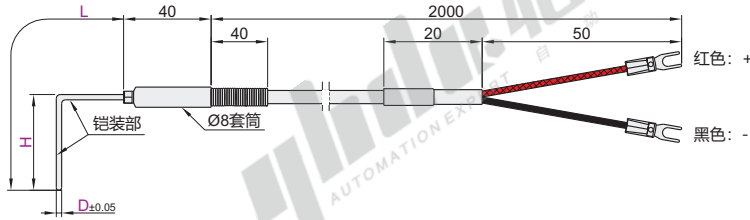

视角标准：第一视角

型号 代码	D	L	H	耐温范围	线缆 (金属网线)	电阻 类型	等级	温度 接点	铠装部 材质	型号 代码	D	L	H	耐温范围	线缆 (金属网线)	电阻 类型	等级	温度 接点	铠装部 材质																								
ZKP09	1.6	100	20	0~650°C	2M	K电阻	1级	非接地型	INC0600 (镍基合金)	ZKP09	2M	K电阻	1级	非接地型	SUS310	100	100	0~700°C	2M	K电阻	1级	非接地型	SUS310																				
			120														120																										
			40														40																										
			50														50																										
			70														70																										
			200														200																										
		2.3	150														20							0~700°C	2M	K电阻	1级	非接地型	SUS310	ZKP09	2M	K电阻	1级	非接地型	SUS310	150	100	0~750°C	2M	K电阻	1级	非接地型	SUS310
		30															30																										
		40															40																										
		50															50																										
		70															70																										
		100															100																										
	3.2	300	20	0~750°C	2M	K电阻	1级	非接地型	SUS310	ZKP09	2M	K电阻	1级	非接地型	SUS310	300	100	0~750°C	2M	K电阻	1级	非接地型	SUS310																				
	30		30																																								
	40		40																																								
	50		50																																								
	70		70																																								
	100		100																																								
	2.3	150	40	0~700°C	2M	K电阻	1级	非接地型	SUS310	ZKP09	2M	K电阻	1级	非接地型	SUS310	150	50	0~750°C	2M	K电阻	1级	非接地型	SUS310																				
	50		50																																								
	70		70																																								
	100		100																																								
	120		120																																								
	150		150																																								
3.2	300	100	0~750°C	2M	K电阻	1级	非接地型	SUS310	ZKP09	2M	K电阻	1级	非接地型	SUS310	300	50	0~750°C	2M	K电阻	1级	非接地型	SUS310																					
70		70																																									
100		100																																									
120		120																																									
150		150																																									
170		170																																									

温度传感器



请按图示订货

型号	代码	D	L	H
ZKP09	1.6	100	20	30


ZKP09—D1.6—L100—H20

防射插头

代码	类型	销售方式	材质
ZKP17	K型热电偶 插头+插口	套	PA66(尼龙)

特点：将补偿导线分别连接连接器的插头和插口，补偿导线的拆装更简便。

插头与插口配套使用，配套发货。

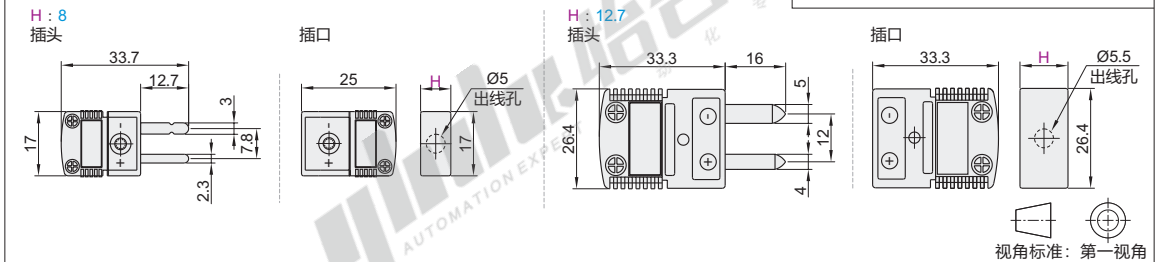

代码	型号	H	耐温范围
ZKP17	8	12.7	0~200°C



请按图示订货

型号	代码	H
ZKP17	8	12.7

ZKP17—H8