

铰链销


- ▶ 两端内螺纹型
- ▶ 止动螺丝固定型
- 轴径公差选择型

代码		材质		硬度	表面处理
两端内螺纹型	止动螺丝固定型	国标	相当		
MIW01	MIW21			—	发黑
MIW02	MIW22			40~45HRC	
MIW03	MIW23	45	S45C	—	无电解镍
MIW04	MIW24			40~45HRC	
MIW05	MIW25			40~45HRC 镀层硬度850HV~	镀铬层, 镀层厚度3~5μm
MIW11	MIW31	0Cr18Ni9	SUS304	—	
MIW16	MIW36	9Cr18Mo	SUS440C	48~53HRC	



RoHS


两端内螺纹型
MIW01/02/03/04/05/11/16

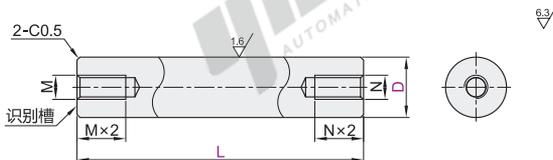

D	公差选择					
	M	P	H	F	C	T※
2-3	+0.008 +0.002	+0.012 +0.006	0 -0.010	-0.006 -0.020	-0.060 -0.085	-0.025 -0.034
4-5-6	+0.012 +0.004	+0.020 +0.012	0 -0.012	-0.010 -0.028	-0.070 -0.100	-0.025 -0.037
8-10	+0.015 +0.006	+0.024 +0.015	0 -0.015	-0.013 -0.035	-0.080 -0.116	-0.025 -0.040
12-18	+0.018 +0.007	+0.028 +0.018	0 -0.018	-0.016 -0.043	-0.095 -0.138	-0.025 -0.043
20-25	+0.021 +0.008	+0.035 +0.022	0 -0.021	-0.020 -0.053	-0.110 -0.162	-0.025 -0.046

※ T公差是与无油衬套配合使用时的建议公差。

止动螺丝固定型
MIW21/22/23/24/25/31/36

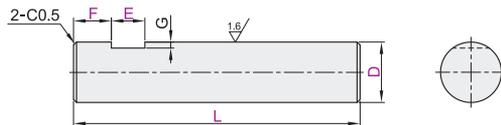

① 工艺孔加工条件: 止动螺丝固定型: 4≤D≤11且总长度≥70; 11<D≤18且总长度≥90; D>18且总长度≥110。(工艺孔详细尺寸见产品简介)



② 两端内螺纹型

代码	型号	公差	D	L		M	N
				最小单位0.1			
MIW01 MIW02 MIW03 MIW04 MIW05 MIW11 MIW16	M(m6) P(p6) H(h7) F(f8) C(c9) T(衬套用)		6	20.0~110.0	M3	M3	
			8	25.0~110.0	M5	M5	
			10	25.0~110.0	M6	M6	
			12	25.0~220.0	M8	M8	
			13	35.0~220.0	M8	M8	
			14	35.0~220.0	M8	M8	
			15	40.0~220.0	M10	M10	
			16	40.0~220.0	M10	M10	
			17	40.0~220.0	M12	M12	
			18	50.0~220.0	M12	M12	
20							
22							
25				M16	M16		

③ 止动螺丝固定型

代码	型号	公差	D	L	最小单位1		G
					E	F	
MIW21 MIW22 MIW23 MIW24 MIW25 MIW31 MIW36	M(m6) P(p6) H(h7) F(f8) C(c9) T(衬套用)		3	5.0~32.0			0.5
			4	10.0~65.0			
			5	10.0~65.0			
			6	10.0~110.0			
			8	15.0~110.0			1
			10	15.0~220.0			
			12	25.0~220.0	1≤E≤50	0≤F≤L/2	
			13				
			14				
			15				2
			16				
			17				
			18	30.0~220.0			
20							
22							
25							

④ 两端内螺纹型

代码	技术说明														
MF() NF()	<p>变更螺纹直径</p> <p>选型方法 MF4</p> <table border="1"> <thead> <tr> <th>D</th> <th>MF-NF</th> </tr> </thead> <tbody> <tr> <td>8</td> <td>3 4</td> </tr> <tr> <td>10-12</td> <td>4 5</td> </tr> <tr> <td>13-15</td> <td>5 6</td> </tr> <tr> <td>16-18</td> <td>6 8</td> </tr> <tr> <td>20-22</td> <td>8 10</td> </tr> <tr> <td>25</td> <td>10 12</td> </tr> </tbody> </table>	D	MF-NF	8	3 4	10-12	4 5	13-15	5 6	16-18	6 8	20-22	8 10	25	10 12
D	MF-NF														
8	3 4														
10-12	4 5														
13-15	5 6														
16-18	6 8														
20-22	8 10														
25	10 12														

⑤ 止动螺丝固定型

代码	技术说明															
MA	<p>增加单侧螺孔</p> <p>选型方法 MA</p> <table border="1"> <thead> <tr> <th>D</th> <th>M</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>6</td> <td>M3</td> <td>6</td> </tr> <tr> <td>8-14</td> <td>M4</td> <td>8</td> </tr> <tr> <td>15-22</td> <td>M6</td> <td>12</td> </tr> <tr> <td>25</td> <td>M8</td> <td>16</td> </tr> </tbody> </table>	D	M	A	6	M3	6	8-14	M4	8	15-22	M6	12	25	M8	16
D	M	A														
6	M3	6														
8-14	M4	8														
15-22	M6	12														
25	M8	16														

⑥ 两端内螺纹型-可选加工

代码	型号	公差	D	L	最小单位0.1	M
MIW01	M(m6)	6	20.0~110.0		M3	
MIW02	P(p6)	8	20.0~110.0		M5	

MIW02—M—D6—L30

⑦ 两端内螺纹型-可选加工

代码	型号	公差	D	L	最小单位0.1	可选加工代码
MIW01	M(m6)	6	20.0~110.0		M3	MF() MF()
MIW02	P(p6)	8	20.0~110.0		M5	

MIW02—M—D8—L30—MF4

⑧ 止动螺丝固定型

代码	型号	公差	D	L	最小单位0.1	E	F
MIW21	M(m6)	6	10.0~110.0		1≤E≤50	0≤F≤L/2	
MIW22	P(p6)	8	10.0~110.0		1≤E≤50	0≤F≤L/2	

MIW22—M—D6—L30—E10—F10

⑨ 止动螺丝固定型-可选加工

代码	型号	公差	D	L	最小单位0.1	E	F	可选加工代码
MIW21	M(m6)	6	20.0~110.0		1≤E≤50	0≤F≤L/2		MA
MIW22	P(p6)	8	20.0~110.0		1≤E≤50	0≤F≤L/2		

MIW22—M—D8—L30—E10—F10—MA

● 优惠价

数量	1~9	10~
价格	100%	另行报价

未税价(元)



① 无表面处理



② 有表面处理



③ 无硬度

悬臂链销

A5