

气压用连接块



端面贯穿形

代码	类型	边长	材质		常压
			国标	相当	
KAC01	I形端面贯穿	标准型	30×30	LF2	1MPa≈10.2Kg/cm ² 以下
KAC02			40×40	A5052	





RoHS


边长:30×30
KAC01-2K





KAC01-3K




KAC01-5K

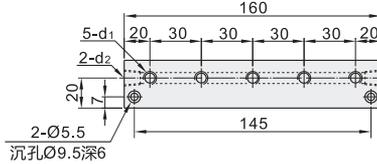



KAC01-4K




KAC01-6K

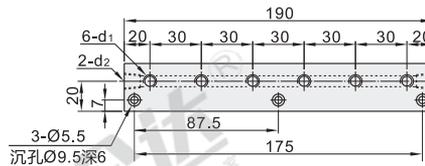



边长:40×40
KAC02-2K





KAC02-5K

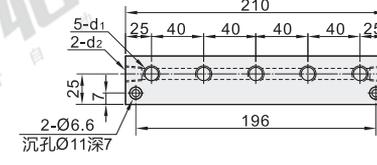



KAC02-3K



KAC02-6K

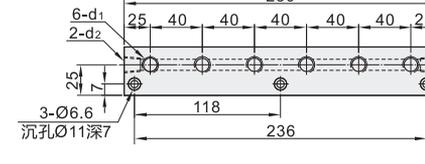

KAC02-4K



视角标准: 第一视角

□ 边长 30×30

代码	型号	侧面孔数	螺纹代号	d ₁	d ₂
				Rc(PT)	Rc(PT)
KAC01	2K	11	1/8	1/8	
		12	1/8	1/4	
		22	1/4	1/4	
		55	M5	M5	
	3K	11	1/8	1/8	
		12	1/8	1/4	
		22	1/4	1/4	
		55	M5	M5	
	4K	11	1/8	1/8	
		12	1/8	1/4	
		22	1/4	1/4	
		55	M5	M5	

□ 边长 30×30

代码	型号	侧面孔数	螺纹代号	d ₁	d ₂
				Rc(PT)	Rc(PT)
KAC01	5K	11	1/8	1/8	
		12	1/8	1/4	
		22	1/4	1/4	
		55	M5	M5	
	6K	12	1/8	1/4	
		22	1/4	1/4	
		55	M5	M5	

□ 螺纹代号如12表示d₁为1/8管螺纹, d₂为1/4管螺纹。

□ 边长 40×40

代码	型号	侧面孔数	螺纹代号	d ₁	d ₂
				Rc(PT)	Rc(PT)
KAC02	2K	24	1/4	1/2	
		33	3/8	3/8	
		44	1/2	1/2	
		33	3/8	3/8	
	3K	44	1/2	1/2	
		23	1/4	3/8	
		24	1/4	1/2	
		33	3/8	3/8	
	4K	44	1/2	1/2	
		24	1/4	1/2	
		24	1/4	1/2	
		33	3/8	3/8	
5K	44	1/2	1/2		
	24	1/4	1/2		
	24	1/4	1/2		
	33	3/8	3/8		
6K	23	1/4	3/8		

□ 螺纹代号如24表示d₁为1/4管螺纹, d₂为1/2管螺纹。



● 优惠价
数量 1~4 5~
价格 100% 另行报价



4

□ 边长 30×30

代码	侧面孔数	螺纹代号	型号
			代码
KAC01	2K	12	KAC01-2K-11