

内六角圆柱头组合螺钉 内六角平圆头组合螺钉

◀ 带平垫圈、弹簧垫圈


内六角圆柱头组合螺钉

代码	类型	螺纹	材质		硬度	表面处理	强度等级
			国标	相当			
TAM01	组合型 带平垫圈、弹簧垫圈	粗牙	35CrMo	SCM435	39~44HRC	发黑	12.9
TAM02			0Cr18Ni9	SUS304	—	—	A2-70


TAM01



TAM02

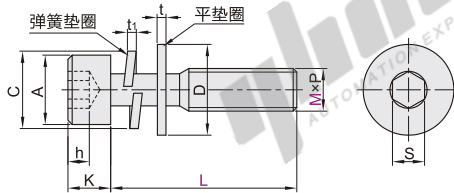

EX
Example
使用示例



① 组合螺钉，使用方便，安装时无需再
一个一个的装入平垫圈、弹簧垫圈，
且拆下螺钉时垫圈不会掉出，防止丢失。



视角标准：第一视角

型号	L										P	A		K		S		C		D		t		t ₁		h									
代码	M											螺距	max	min	max	min	max	min	max	min	max	min	max	min	max	(min)									
(SCM435) TAM01	3	8 10 12		22												0.5	5.68	5.32	3	2.86	2.58	2.52	5.43	4.89	7	6.64	0.55	0.45	0.9	0.7	1.3				
	4	6 8 10 12		16 18 20		22 25 30 35 40		50 55 60												0.7	7.22	6.78	4	3.82	3.08	3.02	6.98	6.4	9	8.64	0.9	0.7	1.2	1	2
	5	12 14 16		20 22 25		40												0.8	8.72	8.28	5	4.82	4.095	4.02	8.95	8.25	10	9.64	1.1	0.9	1.4	1.2	2.5		
	6	12 16		20 25 30		40		55												1	10.22	9.78	6	5.7	5.14	5.02	11.01	10.11	12	11.57	1.8	1.4	1.7	1.5	3
	8	20 22 25		35 40												1.25	13.27	12.73	8	7.64	6.14	6.02	13.94	12.98	16	15.57	2.2	1.8	2.1	1.9	4				
	10	25 30 35 40 45 50 55												1.5	16.27	15.73	10	9.64	8.175	8.025	16.99	15.83	20	19.48	2.7	2.3	2.65	2.35	5						
	12	20		30 35 40 45 50		60 70 80												1.75	18.27	17.73	12	11.57	10.175	10.025	19.93	18.7	24	23.48	3.3	2.7	3.15	2.85	6		
	14	4 5 6 8 10 12 14 16												0.4	3.98	3.62	2	1.86	1.56	1.52	3.75	3.45	5	4.6							1				
(SUS304) TAM02	2.5	5 6 8 10 12 14 16												0.45	4.68	4.32	2.5	2.36	2.06	2.02	4.54	4	6	5.7	0.55	0.45		0.68	0.52	1.1					
	3	6 8 10 12 14 16		20												0.5	5.68	5.32	3	2.86	2.58	2.52	5.43	4.89	7	6.64				0.9	0.7	1.3			
	4	6 8 10 12 14 16 18 20		25 30 35												0.7	7.22	6.78	4	3.82	3.08	3.02	6.98	6.4	9	8.64	0.9	0.7	1.2	1	2				
	5	8 10 12 14 16 18 20		25 30 35 40 45 50												0.8	8.72	8.28	5	4.82	4.095	4.02	8.95	8.25	10	9.64	1.1	0.9	1.4	1.2	2.5				
	6	10 12 14 16 18 20		25 30 35 40 45 50												1	10.22	9.78	6	5.7	5.14	5.02	11.01	10.11	12	11.57	1.8	1.4	1.7	1.5	3				
	8	12 16		20 25 30 35 40 45 50												1.25	13.27	12.73	8	7.64	6.14	6.02	13.94	12.98	16	15.57	2.2	1.8	2.1	1.9	4				
	10	16 20		25 30 35 40												1.5	16.27	15.73	10	9.64	8.175	8.025	16.99	15.83	20	19.48	2.7	2.3	2.65	2.35	5				



请按图示订货

型号	代码	M	L
TAM02	3	6 8 10 12	20 25 30 35 40 45 50 55 60 70 80
TAM02	4	6 8 10 12	20 25 30 35 40 45 50 55 60 70 80

TAM02—M3—L8



未税价(元)

● 优惠价

数量 1~49 50~
价格 100% 另行报价





交货期


5

内六角平圆头组合螺钉


代码	类型	螺纹	材质		表面处理	强度等级
			国标	相当		
TAM09	组合型 带平垫圈、弹簧垫圈	粗牙	0Cr18Ni9	SUS304	—	A2-70

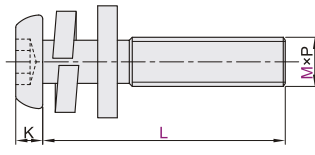

弹簧垫圈



平垫圈



视角标准：第一视角

型号		L										P	D		K		S		弹簧垫圈				平垫圈									
代码	M											螺距	max	min	max	min	max	min	max	min	max	min	max	min	max	min						
TAM09	3	6	8	10	12	16	18	20	25	30		0.5	5.7	5.4	1.65	1.4	2.08	2.02	2.83	2.69	1.3	1.1	0.9	0.7	2.83	2.73	7	6.64	0.55	0.45		
	4	6	8	10	12	16	18	20	25	30	35	40	0.7	7.6	7.24	2.2	1.95	2.58	2.52	3.78	3.6	1.6	1.4	1.2	1	3.78	3.66	9	8.64	0.9	0.7	
	5	8	10	12	16	18	20	25	30	35	40	45	50	0.8	9.5	9.14	2.75	2.5	3.08	3.02	4.75	4.45	2.1	1.9	1.4	1.2	4.75	4.57	10	9.64	1.1	0.9
	6	8	10	12	16	18	20	25	30	35	40	45	50	1	10.5	10.07	3.3	3	4.095	4.02	5.71	5.41	2.65	2.35	1.7	1.5	5.71	5.53	12	11.57	1.8	1.4
	8	12	16	18	20	25	30	35	40	45	50		1.25	14	13.57	4.4	4.1	5.14	5.02	7.64	7.28	3.15	2.85	2.1	1.9	7.64	7.42	16	15.57	2.2	1.8	



请按图示订货

型号	代码	M	L
TAM09	3	6 8 10 12	16 18 20 25 30 35 40 45 50
TAM09	4	6 8 10 12	16 18 20 25 30 35 40 45 50

TAM09—M3—L8



未税价(元)

● 优惠价

数量 1~99 100~
价格 100% 另行报价



交货期

7