


带座轴承

双轴承法兰型
带挡圈L尺寸指定型

类型			材质		表面处理
圆法兰	方法兰	对边法兰	轴承	轴承座	挡圈
BFP31	BFP41	BFP51	钢	S45C	弹簧钢
BFP32	BFP42	BFP52			发黑
BFP33	—	BFP53			喷细砂无电解镀锌
BFP34	—	BFP54	不锈钢	A2017	SUS304
BFP36	BFP46	BFP56			喷细砂本色阳极氧化

① 由于产品批次不同，发货镀锌产品可能存在喷细砂，不影响尺寸及功能。

② 轴承精度：GB/T 307.1 0 级
相当于：JIS B 1514 0 级

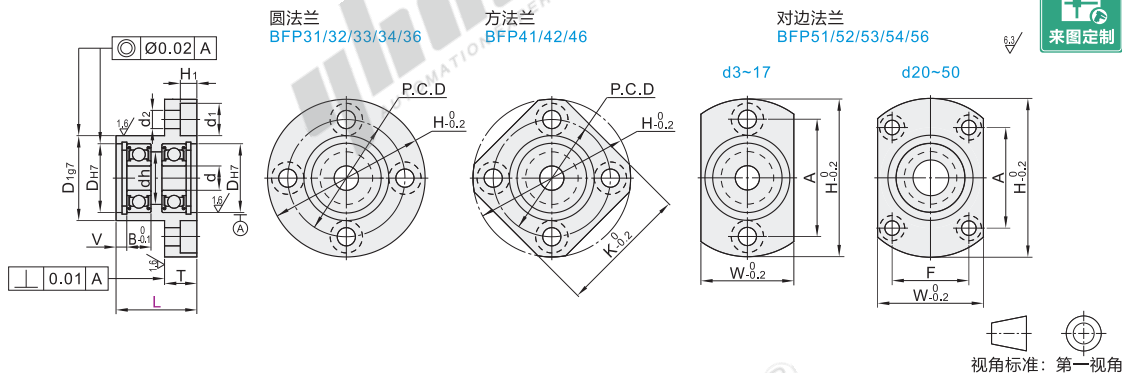

型号	最小单位1	d	D _{H7}	B	V	H	W	T	dh	D _{1g7}	P.C.D	K	A	F	d ₁	d ₂	H ₁
代码	轴承型号	密封圈	L														
圆法兰	623		20~40	3	10	+0.015	4		33	16	7	7	14	-0.006	24	27	24
	624		20~40	4	13	0			35	18		9	17	-0.024	26	28	26
	605		20~30	5	16	+0.018	5		36	20		10	18		30		
	625		20~30		16		2.65		38	22		12	20		28	31	28
	606		20~40	6					39	23		13	21		29	32	29
	626		30~50		19		6		41	25		15	24		31	34	31
	698		25~50														
	608		20~50	8	22		7		45	29		18	27	-0.007	35	36	35
	628		30~50		24		8	2.85	47	32		20	30	-0.028	37	37	37
	6800		20~40		19		5		41	25		15	24		31	34	31
	6900		25~60		22		6	2.65	45	29		19	27		35	36	35
	6000		30~60	10	26	+0.021	8		50	34		22	32	-0.009	40	39	40
	6200		40~60		30		9		54	38		24	36	-0.034	44	42	44
	6801		25~50		21		5		44	29		17	26	-0.007	34	35	34
	6901		30~60	12	24		6		48	31		21	30	-0.028	38	38	38
	6001	ZZ	30~60		28		8	2.85	52	36		24	34	-0.009	42	40	42
	6201	(双盖式)	40~70		32	+0.025	10		56	40		26	38	-0.034	46	43	46
	6802		25~60		24	+0.021	5		47	32		20	30	-0.007	37	37	37
	6902	※VV	30~70		28		7		57	37		25	35		45	45	45
	6002	(非接触式橡胶密封圈)	40~70	15	32	+0.025	9		60	40		28	38		48	46	48
	BFP41		40~70		30	+0.021	7	2.85	60	38		29	42		52	49	52
	BFP42				30		7		60	38		27	36		48	46	48
	BFP46				35		10	3.75	66	44		31	42	-0.009	54	50	54
	6003	DD	50~70	17	40		12	3.95	72	50		34	48	-0.034	60	54	60
	6203	(接触式橡胶密封圈)	35~70		32		7		62	40		28	38		48	46	38
	6804		45~70		37		9	3.75	69	47		34	45		56	54	51
	BFP51		55~80	20	42	+0.025	12		77	54		36	50	-0.010	64	59	56
	6204				47		14	3.95	81	58		40	54	-0.040	68	62	59
	6805		35~70		37		7	3.75	69	47		34	45	-0.009	56	54	51
	6905				42		9		77	54		36	50	-0.034	64	59	56
	6005		55~80	25	47		12	3.95	88	58		41	54	-0.010	72	67	63
	6205				52	+0.030	15	4.2	94	64		45	60	-0.040	78	72	68
	6806		35~70		42	+0.025	7	3.95	77	54		36	50	-0.009	64	59	56
	6906				47		9		88	58		41	54	-0.034	72	67	63
	6006		55~80	30	55		13		96	66		48	62	-0.010	80	73	70
	6206				62		16	4.2	104	74		55	70	-0.040	88	79	75
	6007		55~120		72	+0.030	17	6	126	88		64	84	-0.012	105	95	92
	6207				68		15	5.2	114	82		60	78	-0.040	96	86	80
	6008				80		18	6	134	96		74	92	-0.012	113	98	95
	6208		65~120	40			16							-0.047			
	6010	ZZ			90	+0.035	20	7	147	110		83	106		104	72	11.2
	6210	(双盖式)	70~120	50			20										

※ VV(非接触式橡胶密封圈)不适用于型号为67开始的型号及623、624、605、606的轴承。※ VV(非接触式橡胶密封圈)、DD(接触式橡胶密封圈)、轴承材质为钢。

① 请注意避让挡圈，挡圈尺寸请参考P892。

② 可选加工

型号	最小单位1	型号	最小单位1	可选加工代码
代码	轴承型号	代码	轴承型号	
BFP31	6800	BFP31	6800	20~40
BFP32	6900	BFP32	6900	25~60
BFP32	6900VV	BFP32	6900VV	L40
BFP32	6900VV	BFP32	6900VV	L40



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价

交货期	5
-----	---

可选加工	不装配轴承、挡圈
代码	NA
技术说明	不装配轴承及挡圈(附带出货)