

# S2M/S3M/S5M/S8M型

闭环型 · 标准型


# 圆弧齿同步带

代码	类型	齿距	材质		颜色	使用温度	
			主体	芯线			
Y-EFA31	S2M	标准型	2	橡胶	玻璃纤维线	黑色	-20~80°C
	S3M		3				
	S5M		5				
	S8M		8				

### 皮带宽公差

皮带宽(mm)	公差
3~30	±0.5
31~50	±0.8

RoHS

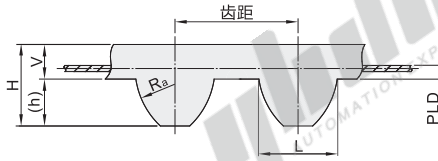

代码	齿形	齿距	L	(h)	H	V	Ra	PLD
Y-EFA31	S2M	2	1.3	0.76	1.31	0.55	1.3	0.254
	S3M	3	1.95	1.14	2.1	0.96	1.95	0.381
	S5M	5	3.25	1.91	3.61	1.7	3.25	0.480
	S8M	8	5.2	3.05	5	1.95	5.2	0.686



视角标准：第一视角

### Y-EFA31-S2M(齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
86	43	86	43
88	44	88	44
90	45	90	45
92	46	92	46
94	47	94	47
98	49	98	49
100	50	100	50
102	51	102	51
104	52	104	52
106	53	106	53
108	54	108	54
110	55	110	55
112	56	112	56
114	57	114	57
116	58	116	58
118	59	118	59
120	60	120	60
122	61	122	61
124	62	124	62
126	63	126	63
128	64	128	64
130	65	130	65
132	66	132	66
134	67	134	67
136	68	136	68
138	69	138	69
140	70	140	70
142	71	142	71
144	72	144	72
146	73	146	73
148	74	148	74
150	75	150	75
152	76	152	76
156	78	156	78
158	79	158	79
160	80	160	80
162	81	162	81
164	82	164	82
166	83	166	83
168	84	168	84
170	85	170	85
172	86	172	86
174	87	174	87
176	88	176	88
178	89	178	89
180	90	180	90
182	91	182	91
184	92	184	92
186	93	186	93
188	94	188	94
190	95	190	95
192	96	192	96
194	97	194	97
196	98	196	98
198	99	198	99
200	100	200	100
202	101	202	101
204	102	204	102
208	104	208	104
210	105	210	105
212	106	212	106
216	108	216	108
218	109	218	109
220	110	220	110
222	111	222	111
224	112	224	112
226	113	226	113
230	115	230	115
232	116	232	116
234	117	234	117
236	118	236	118
238	119	238	119
240	120	240	120
242	121	242	121
244	122	244	122
248	124	248	124
250	125	250	125
252	126	252	126
254	127	254	127
256	128	256	128
258	129	258	129
260	130	260	130
262	131	262	131

### Y-EFA31-S2M(齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
264	132	264	132
268	134	268	134
270	135	270	135
272	136	272	136
274	137	274	137
276	138	276	138
278	139	278	139
280	140	280	140
282	141	282	141
284	142	284	142
286	143	286	143
288	144	288	144
292	146	292	146
294	147	294	147
296	148	296	148
300	150	300	150
304	152	304	152
306	153	306	153
308	154	308	154
310	155	310	155
312	156	312	156
314	157	314	157
316	158	316	158
318	159	318	159
320	160	320	160
322	161	322	161
324	162	324	162
326	163	326	163
328	164	328	164
330	165	330	165
332	166	332	166
334	167	334	167
336	168	336	168
338	169	338	169
340	170	340	170
342	171	342	171
344	172	344	172
350	175	350	175
354	177	354	177
360	180	360	180
364	182	364	182
370	185	370	185
372	186	372	186
374	187	374	187
376	188	376	188
380	190	380	190
386	193	386	193
390	195	390	195
400	200	400	200
406	203	406	203
408	204	408	204
410	205	410	205
416	208	416	208
420	210	420	210
426	213	426	213
428	214	428	214
434	217	434	217
436	218	436	218
438	219	438	219
440	220	440	220
446	224	446	224
452	226	452	226
454	227	454	227
456	228	456	228
460	230	460	230
468	234	468	234
474	237	474	237
480	240	480	240
486	243	486	243
490	245	490	245
494	247	494	247
500	250	500	250
506	253	506	253
520	260	520	260
524	262	524	262
530	265	530	265
532	266	532	266
540	270	540	270
550	275	550	275
558	279	558	279
560	280	560	280
572	286	572	286
580	290	580	290

### Y-EFA31-S2M(齿距: 2)

型号	皮带公称宽度	皮带周长	齿数
594	297	594	297
596	298	596	298
600	300	600	300
604	302	604	302
606	303	606	303
620	310	620	310
630	315	630	315
632	316	632	316
650	325	650	325
652	326	652	326
654	327	654	327
656	328	656	328
660	330	660	330
668	334	668	334
676	338	676	338
692	346	692	346
700	350	700	350
710	355	710	355
726	363	726	363
742	371	742	371
752	376	752	376
766	383	766	383
796	398	796	398
800	400	800	400
810	405	810	405
826	413	826	413
828	414	828	414
848	424	848	424
856	428	856	428
864	432	864	432
898	449	898	449
900	450	900	450
940	470	940	470
946	473	946	473
950	475	950	475
984	492	984	492
1000	500	1000	500
1020	510	1020	510
1024	512	1024	512
1032	516	1032	516
1036	518	1036	518
1042	521	1042	521
1064	532	1064	532
1066	533	1066	533
1074	537	1074	537
1086	543	1086	543
1094	547	1094	547
1100	550	1100	550
1110	555	1110	555
1136	568	1136	568
1154	577	1154	577
1166	583	1166	583
1200	600	1200	600
1224	612	1224	612
1228	614	1228	614

### Y-EFA31-S3M(齿距: 3)

型号	皮带公称宽度	皮带周长	齿数
93	31	93	31
99	33	99	33
108	36	108	36
120	40	120	40
123	41	123	41
129	43	129	43
132	44	132	44
141	47	141	47
144	48	144	48
147	49	147	49
150	50	150	50
156	52	156	52
159	53	159	53
162	54	162	54
168	56	168	56
171	57	171	57
174	58	174	58
177	59	177	59
180	60	180	60
183	61	183	61
186	62	186	62
189	63	189	63
192	64	192	64
195	65	195	65
198	66	198	66
201	67	201	67
204	68	204	68
207	69	207	69
210	70	210	70
213	71	213	71
219	73	219	73
222	74	222	74
225	75	225	75
228	76	228	76
234	78	234	78
237	79	237	79
240	80	240	80
243	81	243	81
246	82	246	82
249	83	249	83
252	84	252	84
255	85	255	85
258	86	258	86
261	87	261	87
267	89	267	89
270	90	270	90
273	91	273	91
279	93	279	93
282	94	282	94
285	95	285	95
288	96	288	96
291	97	291	97
294	98	294	98
297	99	297	99
303	101	303	101
306	102	306	102
309	103	309	103
312	104	312	104
315	105	315	105
324	108	324	108
327	109	327	109
330	110	330	110
333	111	333	111
336	112	336	112
339	113	339	113
351	117	351	117
363	121	363	121
366	122	366	122

# 圆弧齿同步带

## S2M/S3M/S5M/S8M型 闭环型 · 标准型

Y-EFA31-S5M(齿距: 5)

型号		皮带公称宽度	齿数
代码	皮带周长		
Y-EFA31-S5M	100 (10mm)	225	45
		230	46
		255	51
		260	52
		275	55
		295	59
		300	60
		320	64
		325	65
		350	70
	360	72	
	375	75	
	380	76	
	390	78	
	400	80	
	410	82	
	420	84	
	425	85	
	435	87	
	440	88	
	445	89	
	450	90	
	475	95	
	490	98	
	500	100	
	520	104	
	525	105	
	550	110	
	560	112	
	565	113	
570	114		
575	115		
600	120		
625	125		
635	127		
645	129		
650	130		
665	133		
670	134		
675	135		
695	139		
700	140		
710	142		
725	145		
740	148		
750	150		
765	153		

Y-EFA31-S5M(齿距: 5)

型号		皮带公称宽度	齿数
代码	皮带周长		
Y-EFA31-S5M	100 (10mm)	770	154
		775	155
		800	160
		810	162
		830	166
		850	170
		860	172
		870	174
		900	180
		920	184
	940	188	
	950	190	
	965	193	
	975	195	
	1000	200	
	1025	205	
	1050	210	
	1125	225	
	1135	227	
	1145	229	
	1195	239	
	1225	245	
	1250	250	
	1260	252	
	1270	254	
	1295	259	
	1350	270	
	1420	284	
	1595	319	
	1715	343	
1800	360		
2000	400		

Y-EFA31-S8M(齿距: 8)

型号		皮带公称宽度	齿数
代码	皮带周长		
Y-EFA31-S8M	150 (15mm)	352	44
		384	48
		408	51
		424	53
		440	55
		456	57
		480	60
		512	64
		520	65
		528	66
	560	70	
	584	73	
	600	75	
	632	79	
	640	80	
	656	82	
	672	84	
	680	85	
	712	89	
	720	90	
	728	91	
	760	95	
	800	100	
	824	103	
	840	105	
	848	106	
	880	110	
	888	111	
	896	112	
	920	115	
944	118		
960	120		
976	122		
984	123		
1000	125		
1032	129		
1040	130		
1056	132		
1096	137		
1120	140		
1136	142		
1152	144		
1160	145		
1184	148		
1192	149		
1200	150		
1216	152		

Y-EFA31-S8M(齿距: 8)

型号		皮带公称宽度	齿数
代码	皮带周长		
Y-EFA31-S8M	150 (15mm)	1224	153
		1240	155
		1248	156
		1272	159
		1280	160
		1296	162
		1304	163
		1312	164
		1344	168
		1352	169
	1384	173	
	1392	174	
	1400	175	
	1424	178	
	1440	180	
	1480	185	
	1520	190	
	1552	194	
	1600	200	
	1680	210	
250 (25mm)	1728	216	
	1760	220	
	1776	222	
	1800	225	
	1808	226	
	1824	228	
	1840	230	
	1952	244	
	2000	250	
	2120	265	
300 (30mm)	2240	280	
	2304	288	
	2400	300	
	2496	312	
	2560	320	
	2600	325	
	2800	350	
	2880	360	
	2944	368	
	3200	400	
400 (40mm)	3600	450	
	3720	465	
	3904	488	
	4400	550	

同步带

Y-EFA31-S5M(齿距: 5)

型号		皮带公称宽度	皮带周长
代码	皮带公称宽度		
Y-EFA31-S5M	100	225	
	150	230	

Y-EFA31-S5M-150-225



优惠价		
数量	1~4	5~
价格	100%	另行报价

