


氮气弹簧

头部安装万向型


代码	类型	材质			表面处理			使用气体	使用温度
		气缸	活塞杆	前端部	气缸	活塞杆	前端部		
FHJ46	标准型	STKM11A	S20C	Q235	烤漆	镀硬铬	烤漆	N ₂	-20℃~60℃
E-FHJ46	经济型				(黑色亚光)		(黑色亚光)		



规格: 15050A~22300B

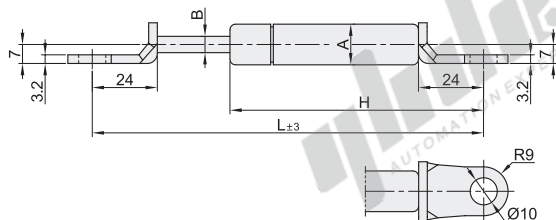

规格: 27150A~27300B

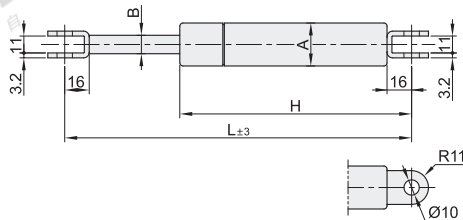

① 适用氮气弹簧支架详见下页。

视角标准: 第一视角

型号		最大长度 Lmax	最小长度 Lmin	行程	氮气弹簧反作用力(20℃)					A	B	H	适用安装 支架	重量 (g)
代码	规格				最大长度-10mm行程时		最大长度-(s)mm行程时							
					Fa		Fb		(S)					
FHJ46 E-FHJ46	15050A*	246	196	50	N	kgf	N	kgf	40	15	6	164		
	49				5	69	7							
	70				7.1	90	9.1							
	15050B*	98	10	127	13	70	218							
	15080A*	49	5	69	7									
	15080B*	98	10	127	13									
	15090A*	49	5	69	7	80	238	153						
	15090B*	98	10	127	13									
	15100A*	49	5	69	7									
	15100B*	98	10	127	13	90	254	168						
	18100A*	196	20	255	26									
	18100B*	294	30	382	39									
	18150A*	196	20	265	27	18	8	253	208					
	18150B*	294	30	392	40									
	22050A*	196	20	265	27									
	22050B*	294	30	402	41	40	163	213						
	22050C*	392	40	529	54									
	22050D*	490	50	655	66									
	22080A*	196	20	274	28	70	217	268						
	22080B*	294	30	412	42									
	22080C*	392	40	539	55									
	22080D*	490	50	675	68	22	10	237	FHJ52-8A FHJ52-8B FHJ52-8C FHJ52-8D	278				
	22090A*	196	20	265	27									
	22090B*	294	30	402	41									
	22090C*	392	40	529	54	80	253	303						
	22090D*	490	50	659	67									
	22100A*	196	20	274	28									
	22100B*	294	30	412	42	90	287	318						
	22100C*	392	40	549	56									
	22120A*	196	20	274	28									
	22120B*	294	30	402	41	110	307	328						
	22120C*	392	40	539	55									
	22120D*	490	50	672	68									
	22130A*	196	20	274	28	120	343	398						
	22130B*	294	30	402	41									
	22130C*	392	40	539	55									
	22150A*	196	20	274	28	140	397	418						
	22150B*	294	30	402	41									
	22150C*	392	40	539	55									
	22180A*	196	20	265	27	170	433	478						
	22180B*	294	30	402	41									
	22180C*	392	40	539	55									
	22200A*	196	20	265	27	190	467	538						
	22200B*	294	30	402	41									
	22200C*	392	40	529	54									
	22250A*	196	20	304	31	240	517	598						
	22250B*	294	30	451	46									
	22250C*	392	40	598	61									
	22300A*	196	20	323	33	290	525	998						
	22300B*	294	30	490	50									
	27150A*	490	50	657	67									
	27150B*	588	60	784	80	140	351	608						
	27150C*	686	70	921	94									
	27200A*	490	50	657	67									
	27200B*	588	60	784	80	190	441	758						
	27200C*	686	70	921	94									
	27250A*	490	50	725	74									
	27250B*	588	60	872	89	240	475	898						
27250C*	686	70	1019	104										
27300A*	490	50	774	79										
27300B*	588	60	931	95	290	525	998							

① 经济型仅适用带*号规格。

型号		最大长度 Lmax
代码	规格	
FHJ46	15050A	246
E-FHJ46	15050K	

请按图示订货 FHJ46 — 15050A



数量	优惠价	
	1~4	5~
价格	100%	另行报价

交货期
6