


旋转泛塞封

密封圈
C5

代码	材质			用途	工况条件			使用介质
	主体	弹簧	颜色		最高压力(MPa) 动态 静态	最高速度(m/s) 旋转	使用温度范围	
XTS21	聚四氟乙烯+碳纤维	SUS301	黑色	轴用 旋转密封	45 60	2	-40~260°C	水、蒸汽、油、原油、 普通化学品、石油化学品

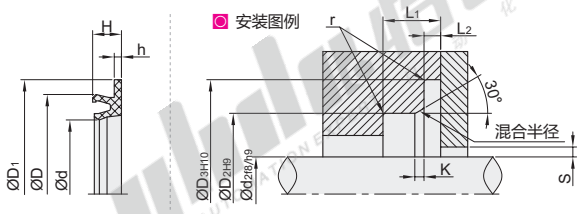

型号		产品尺寸					安装尺寸										
代码	规格	d	D	D1	H	h	d2 轴径	沟槽底径			槽宽		K 倒角	r(max) 倒圆	S径向间隙(max)		
								D2	D3	L1	L2			<2MPa	<10MPa	<20MPa	
XTS21	01	4.5	10.5	14	3.4	0.9	5	10	14.2	3.6	0.85 ⁰ _{-0.1}	0.8	0.3	0.25	0.15	0.1	
	02	5.5	11.5	15			6	11	15.2								
	03	7.5	13.5	17			8	13	17.2								
	04	9.5	15.5	19			10	15	19.2								
	05	11.5	17.5	21			12	17	21.2								
	06	13.5	19.5	23			14	19	23.2								
	07	14.5	20.5	24			15	20	24.2								
	08	15.5	21.5	25			16	21	25.2								
	09	17.5	23.5	27			18	23	27.2								
	10	19.4	27.6	32			20	27	32.5								
	11	21.4	29.6	34	4.3	1.4	22	29	34.5	4.8	1.35 ⁰ _{-0.15}	1.1	0.4	0.35	0.2	0.15	
	12	24.4	32.6	37			25	32	37.5								
	13	27.4	35.6	40			28	35	40.5								
	14	29.4	37.6	42			30	37	42.5								
	15	31.4	39.6	44			32	39	44.5								
	16	34.4	42.6	47			35	42	47.5								
	17	35.4	43.6	48			36	43	48.5								
	18	39.2	51.3	56.9			40	50.5	57.5								
	19	41.2	53.3	58.9			42	52.5	59.5								
	20	44.2	56.3	61.9			45	55.5	62.5								
	21	47.2	59.3	64.9	48	58.5	65.5										
	22	49.2	61.3	66.9	50	60.5	67.5										
	23	51.2	63.3	68.9	52	62.5	69.5										
	24	54.2	66.3	71.9	55	65.5	72.5										
	25	55.2	67.3	72.9	56	66.5	73.2										
	26	59.2	71.3	76.9	60	70.5	77.5										
	27	62.2	74.3	79.9	63	73.5	80.5										
	28	64.2	76.3	81.9	65	75.5	82.5										
	29	69.2	81.3	86.9	70	80.5	87.5										
	30	74.2	86.3	91.9	75	85.5	92.5										
	31	79.2	91.3	96.9	80	90.5	97.5										
	32	84.2	96.3	101.9	85	95.5	102.5										
	33	89.2	101.3	106.9	90	100.5	107.5										
	34	94.2	106.3	111.9	95	105.5	112.5										
	35	99.2	111.3	116.9	100	110.5	117.5										
36	104.2	116.3	121.9	105	115.5	122.5											
37	109.2	121.3	126.9	110	120.5	127.5											
38	114.2	126.3	131.9	115	125.5	132.5											
39	119.2	131.3	136.9	6.6	1.9	120	130.5	137.5	7.1	1.8 ⁰ _{-0.2}	1.4	0.5	0.5	0.25	0.2		
40	124.2	136.3	141.9			125	135.5	142.5									
41	129.2	141.3	146.9			130	140.5	147.5									
42	134.2	146.3	151.9			135	145.5	152.5									
43	139.2	151.3	156.9			140	150.5	157.5									
44	149.2	161.3	166.9			150	160.5	167.5									
45	159.2	171.3	176.9			160	170.5	177.5									
46	169.2	181.3	186.9			170	180.5	187.5									
47	179.2	191.3	196.9			180	190.5	197.5									
48	189.2	201.3	206.9			190	200.5	207.5									
49	194.2	206.3	211.9	195	205.5	212.5											
50	199.2	211.3	216.9	200	210.5	217.5											
51	209.2	221.3	226.9	210	220.5	227.5											
52	214.2	226.3	231.9	215	225.5	232.5											
53	219.2	231.3	236.9	220	230.5	237.5											
54	229.2	241.3	246.9	230	240.5	247.5											
55	239.2	251.3	256.9	240	250.5	257.5											
56	249.2	261.3	266.9	250	260.5	267.5											
57	279.2	291.3	296.9	280	290.5	297.5											
58	299.2	311.3	316.9	300	310.5	317.5											
59	319.2	331.3	336.9	320	330.5	337.5											
60	349.2	361.3	366.9	350	360.5	367.5											
61	359.2	371.3	376.9	360	370.5	377.5											
62	399.2	411.3	416.9	400	410.5	422											
63	419.2	431.3	436.9	420	430.5	442											
64	449.2	461.3	466.9	450	460.5	472											
65	479.2	491.3	496.9	480	490.5	502											
66	499.2	511.3	516.9	500	510.5	522											
67	599.2	611.3	616.9	600	610.5	622											
68	699.2	711.3	716.9	700	710.5	722											

请按图示订货

型号
代码 规格
XTS21 01
XTS21-02

优惠价
数量 1~7 8~
价格 100% 另行报价
未税价(元)

交货期
7