


代码	类型	轴承类型代码	轴承精度	轴承材质	
				国标	相当
BAR...J	进口型	6	GB/T 307.1 6级	GCr15	SUJ2
J-BAR06		16			



① 出厂前未封入润滑脂，请在使用前封入。
② 不承诺品牌。

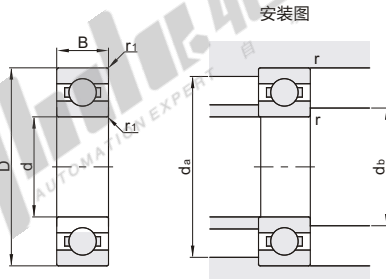

轴承类型代码6

代码	轴承型号	d	D	B	r ₁ (min)	基本额定负载(KN)		极限转速 rpm (参考)	安装尺寸				重量 (g) (参考)
						Cr(动)	Cor(静)		d _b		d _a (max)	r (max)	
									(min)	(max)			
6700		10	15	3	0.2	0.85	0.43	15000	10.4	11.21	14.2	0.2	5
6800		10	19	5		1.83	0.93	24000		12.5	17		
6900		10	22	6	0.3	2.7	1.27	21000	12	13	20	0.3	9
6000		10	26	8		4.55	1.97	21000		13.5	24		19
6200		10	30	9	0.6	5.1	2.39	18000	14	16	26	0.6	32
6701		10	18	4	0.2	1.1	0.7	8300	13.6	13.8	16.4	0.2	2
6801		10	21	5		1.92	1.04	20000		14.5	19		6
6901		10	24	6	0.3	2.89	1.46	19000	14	15	22	0.3	11
6001		10	28	8		5.1	2.37	18000		16	26		22
6201		10	32	10	0.6	6.82	3.08	16000	16	17	28	0.6	37
6802		10	24	5		2.1	1.25	17000		17.5	22		7
6902		10	28	7	0.3	4.3	2.3	16000	17	17.5	26	0.3	16
6002		10	32	9		5.6	2.84	15000		19	30		30
6202		10	35	11	0.6	7.6	3.7	15000	19	20	31	0.6	45
6803		10	26	5		2.2	1.5	15000		19.5	24		8
6903		10	30	7	0.3	4.6	2.6	14000	19	20	28	0.3	18
6003		10	35	10		6	3.25	14000		21	33		39
6203		10	40	12	0.6	9.57	4.8	12000	21	23	36	0.6	66
6804		10	32	7		3.5	2.2	13000		22.5	30		19
6904		10	37	9	0.3	6.4	3.7	12000	22	24	35	0.3	36
6004		10	42	12	0.6	9.38	5.03	11000		26	38	0.6	69
6204		10	47	14	1	12.8	6.65	10000	25	26	42	1	106
6805		10	37	7		4.3	2.95	10000		28	35		22
6905		10	42	9	0.3	7.02	4.53	9800	27	29	40	0.3	42
6005		10	47	12	0.6	10.07	5.82	9400	29	30.5	43	0.6	80
6205		10	52	15	1	14	7.88	8900	30	32	47	1	128
6806		10	42	7		4.96	3.62	8800		33	40		26
6906		10	47	9	0.3	7.24	5	8400	32	34	45	0.3	48
6006		10	55	13		13.2	8.27	7700		37	50		116
6206		10	62	16	1	19.5	11.3	7300	35	39	57	1	199
6807		10	47	7	0.3	4.2	3.5	7600	37	38	45	0.3	29
6907		10	55	10	0.6	9.6	6.8	7100	39	40	51	0.6	74
6007		10	62	14	1	15.9	10.3	6800	40	42	57		155
6207		10	72	17	1.1	25.7	15.3	6300	41.5	45	65.5	1.1	288
6808		10	52	7	0.3	5.07	4.37	6700	42	43	50	0.3	33
6908		10	62	12	0.6	13.7	9.9	6300	44	45	58	0.6	110
6008		10	68	15	1	16.8	11.5	6100	45	47	63		190
6208		10	80	18	1.1	30.8	19.8	5800	46.5	51	73.5	1.1	366
6010		10	80	16	1	21.8	16.6	4600	55	57.5	75		261
6210		10	90	20	1.1	35	23.2	4700	56.5	60	83.5	1.1	454
6811		10	72	9	0.3	9.1	8.5	4800	57	59	70	0.3	83
6911		10	80	13	1	15.96	13.25	4300	60	61.5	75		180
6011		10	90	18	1.1	30.9	22.4	4500	61.5	64	83.5	1.1	388
6812		10	78	10	0.3	9.1	8.7	4400	62	64.5	76	0.3	106
6912		10	85	13	1	28.7	17.2	4300	65	66.5	80		193
6012		10	95	18	1.1	30.7	22.7	4100	66.5	69	88.5	1.1	414
6813		10	85	10	0.6	11.9	11.5	4100	69	70	81	0.6	128
6913		10	90	13	1	17.4	16.1	4000	70	71.5	85		206
6013		10	100	18	1.1	29.2	23.5	3900	71.5	74	93.5	1.1	421

① 1Kg=9.81N

深沟球轴承

无防尘盖式 进口型

轴承类型代码6

代码	轴承型号	d	D	B	r ₁ (min)	基本额定负载/极限转速			安装尺寸				重量 (g) (参考)
						Cr(动)	Cor(静)	rpm (参考)	d _b (min)	d _b (max)	d _a (max)	r (max)	
BAR...J	6814	70	90	10	0.6	12.2	11.9	3800	74	75.5	86	0.6	137
	6914	70	100	16	1	23.7	21.1	3700	75	77.5	95		334
	6014	70	110	20	1.1	38.6	30.4	3600	76.5	80.5	103.5	1	604
	6815	75	95	10	0.6	12.5	12.8	3600	79	80	91	0.6	145
	6915	75	105	16	1	24.3	22.5	3500	80	82.5	100		353
	6015	75	115	20	1.1	40.1	33.1	3300	81.5	85.5	108.5	1	649
	6816	80	100	10	0.6	12.8	12.7	3400	84	85	96	0.6	154
	6916	80	110	16	1	25	23.9	3200	85	88	105		373
	6016	80	125	22	1.1	47.5	39.8	3100	86.5	91.5	118.5		854
	6817	85	110	13	1	19.8	19.2	3100	90	91	105		270
	6917	85	120	18	1	31.9	29.7	3000		94	113.5	1	536
	6017	85	130	22	1.1	52.8	44.5	2900	91.5	97	123.5		890
	6818	90	115	13	1	19	19.7	3000	95	96	110		285
	6918	90	125	18	1.1	32.8	31.5	2900	96.5	99	118.5		554
	6018	90	140	24	1.5	61.2	50.6	2800	98	102	132	1.5	1020
	6819	95	120	13	1	20.8	19.8	2800	100	101	115		300
	6919	95	130	18	1.1	33.7	33.4	2800		104	123.5	1	579
	6019	95	145	24	1.5	60.8	51	2600	103	109	137	1.5	1080
	6820	100	125	13	1	20.1	22	2700	105	106	120		313
	6920	100	140	20	1.1	42.7	41.9	2600	106.5	110	133.5	1	783
	6020	100	150	24	1.5	60.2	54.2	2600	108	110	142	1.5	1150
	6821	105	130	13	1	19.8	22	4800	110	110.5	125		330
	6921	105	145	20	1.1	42.5	42	2500	111.5	115	138.5	1	816
	6021	105	160	26	2	59.2	61.2	2400	114	119	151	2	1590
	6822	110	140	16	1	28.1	30.7	4300	115	117	135		515
	6922	110	150	20	1.1	43.5	44.5	2400	116.5	120	143.5	1	849
	6022	110	170	28	2	82	73	2300	119	126	161	2	1960
	6824	120	150	16	1	28.9	32.1	4000	125	127	145		555
	6924	120	165	22	1.1	53	53.9	3800	126.5	132	158.5	1	1150
	6024	120	180	28	2	88.1	79.7	2100	129	136	171	2	2070
	6826	130	165	18	1.1	37.9	42.9	3600	136.5	138	158.5	1	800
	6926	130	180	24	1.5	65.1	67.2	3400	138	144	172	1.5	1520
	6026	130	200	33	2	105	96.8	3200	139	148	191	2	3160
	6828	140	175	18	1.1	38.2	44.3	3400	146.5	148.5	168.5	1	850
	6928	140	190	24	1.5	68.5	71.5	3200	148	153.5	182	1.5	1620
	6028	140	210	33	2	105.4	101.8	3000	149	158	201	2	3350
	6830	150	190	20	1.1	47.5	55	3000	156.5	160	183.5	1	1160
	6930	150	210	28	2	84.7	90.2	2800	159	166	201	2	2470
	6030	150	225	35	2.1	131.7	124.5	2600	161	169	214	2	4080

1 KgF=9.81N

轴承类型代码16

代码	轴承型号	d	D	B	r ₁ (min)	基本额定负载(KN)			极限转速 rpm(参考)	安装尺寸			重量(g) (参考)
						Cr(动)	Cor(静)			d _b (min)	d _a (max)	r(max)	
J-BAR06	16001	12	28	7		5.1	2.37	32000	14	26		19	
	16002	15	32			5.6	2.83	28000	17	30		27	
	16003	17	35	8		6	3.25	26000	19	33		33	
	16004	20	42		0.3	7.9	4.45	20000	22	40	0.3	48	
	16005	25	47			8.85	5.6	18000	27	45		59	
	16006	30	55			11.2	7.35	15000	32	53		87	
	16007	35	62	9		11.7	8.2	13000	37	60		107	
	16008	40	68			12.6	9.65	12000	42	66		130	
	16009	45	75	10		14.9	11.4	11000	49	71		167	
	16010	50	80			15.4	12.4	10000	54	76		175	
	16011	55	90			19.4	16.3	9000	59	86		257	
	16012	60	95	11		20	17.5	8500	64	91		281	
	16013	65	100		0.6	20.5	18.7	8000	69	96	0.6	300	
	16014	70	110	13		26.8	23.6	7100	74	106		441	
	16015	75	115			27.6	25.3	6700	79	111		463	
	16016	80	125	14		32	29.6	6300	84	121		621	
	16017	85	130			33	31.5	6000	89	126		652	
	16018	90	140	14		41.5	39.5	5600	95	135		873	
	16019	95	145	16		43	42	5300	100	140		904	
	16020	100	150			42.5			105	145		945	
	16021	105	160	18		52	50.5	4800	110	155		1240	
	16022	110	170			57.5	56.5	4500	115	165	1	1510	
	16024	120	180	19		56.5	57.5	4300	125	175		1600	
	16026	130	200	22		75.5	77.5	3600	136.5	193.5		2400	
	16028	140	210		1.1	77.5	82.5	3400	146.5	203.5		2840	
	16030	150	225	24		84	91	3000	156.5	218.5		3620	
	16032	160	240	25		99	108	2800	168	232		4200	
	16034	170	260	28		114	126	2600	178	252	1.5	5710	
	16036	180	280			145	157		189	271		7500	
	16038	190	290	31		149	168	2400	199	281		7780	
	16040	200	310	34		161	180	2200	209	301	2	10000	
	16044	220	340	37	2.1	180	217	1600	231	329		13100	

1 KgF=9.81N

请按照图示订货

代码	轴承型号	d
BAR6700-J	6700 6800	10


轴承类型代码16

代码	轴承型号	d
J-BAR06	16001 16002	12 15

J-BAR06—16001



深沟球轴承内部装配轴，外部固定块用于固定，起到支撑、传动的作用。



优惠价

数量	1~9	10~
价格	100%	另行报价

未税价(元)

交货期

5