

代码	类型	外框材质	轴承
ZHJ67	轴流风扇	DC型	PBT 双滚珠


CE

UL


① 所有风量曲线图都是基于24V电压绘制，仅供参考。




长×宽×高: 40×40×10

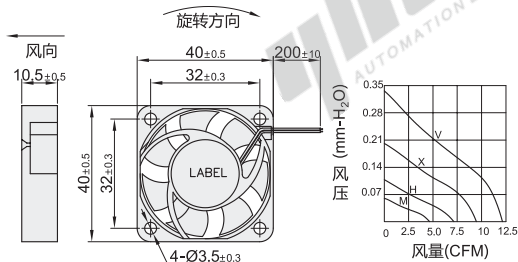


长×宽×高: 40×40×20

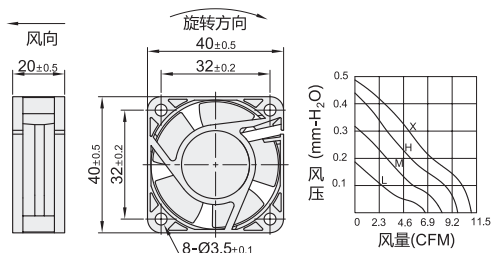


长×宽×高: 50×50×15

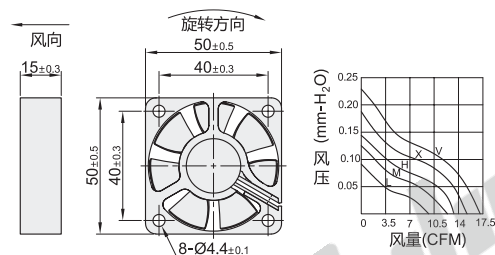


长×宽×高: 60×60×25

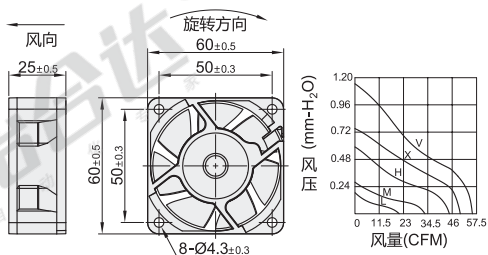


长×宽×高: 60×60×38

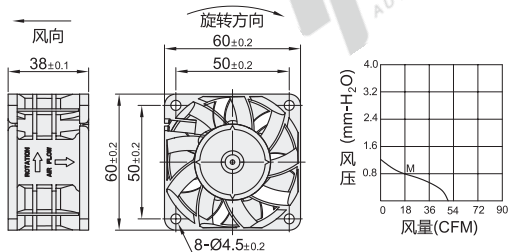


长×宽×高: 70×70×25

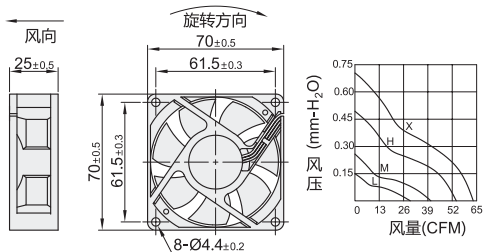

长×宽×高: 80×80×15

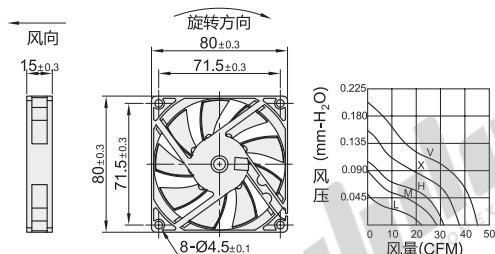

长×宽×高: 80×80×25


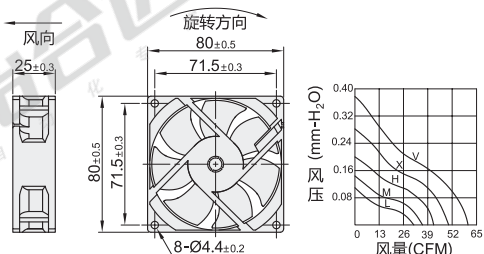


风扇



标准型 · DC轴流风扇

散热风扇



长×宽×高: 80×80×38





长×宽×高: 92×92×25





长×宽×高: 92×92×38





长×宽×高: 120×120×25





长×宽×高: 120×120×38



长×宽×高: 150×150×50




长×宽×高: 172×150×51



接线图

+	红色单线
-	黑色单线
FG	黄色单线
PWM	蓝色单线
RD(NPN)	白色单线



视角标准: 第一视角

型号	规格	输出功能	长×宽×高	适用配件	输入电压	转速等级	电流 (A)	转速 (RPM)	风量 (CFM)	风压 (mm-H ₂ O)	噪音 (Db[A])
ZHJ67	4010B05LP		40×40×10	防护网ZHJ42 过滤网ZHJ41 或 百叶窗ZHJ43	DC5V	L	0.14	4000	4.75	1.5	21
	4010B05MP					M	0.18	6000	7.24	2.8	26
	4010B05HP					H	0.29	8000	9.25	5.1	35
	4010B12LP				DC12V	L	0.10	4000	4.75	1.5	21
	4010B12MP					M	0.11	6000	7.24	2.8	26
	4010B12HP	00(无功能)				H	0.14	8000	9.25	5.1	33
	4010B12XP	0F(FG脉冲输出)	40×40×20		DC24V	X	0.18	10000	12.23	8.4	39
	4010B24MP	0R(RD转停输出)				M	0.06	6000	8	1.5	21
	4010B24HP	0Rb(反RD转停输出)				H	0.09	8000	9.25	5.1	33
	4010B24XP	1F(FG+PWM调速)			DC12V	X	0.09	9000	12.23	7.6	35
	4010B24VP	1R(RD+PWM调速)				V	0.15	10000	12.23	8.4	39
	4020B12LP	1Rb(反RD转停输出+ PWM调速)				L	0.1	5000	6.7	4.8	23
	4020B12MP		40×40×20		DC12V	M	0.12	6500	8.4	8.1	27
	4020B12HP					H	0.16	8500	9.7	6.5	36
	4020B12XP					X	0.22	9500	11.1	11.9	37
	4020B24LP				DC24V	L	0.07	5000	5.2	3.2	23
	4020B24MP					M	0.09	6500	7.1	5.3	27
	4020B24HP					H	0.13	8500	9.7	6.5	36
	4020B24XP					X	0.15	10000	11.1	8.1	42

① 转速等级: L-低, M-标准, H-高, X-超高, V-极高。

型号		输出功能	长×宽×高	适用配件	输入电压	转速等级	电流 (A)	转速 (RPM)	风量 (CFM)	风压 (mm-H ₂ O)	噪音 (Db[A])	
代码	规格											
ZHJ67	5015B12LP		50×50×15		DC12V	L	0.08	4000	12.2	3.0	27	
	5015B12MP					M	0.10	5000	15.0	4.1	30	
	5015B12HP					H	0.13	6000	17	5.8	32	
	5015B12XP					X	0.18	7000	19	7.1	35	
	5015B24LP				DC24V	L	0.08	4000	12.2	3.0	27	
	5015B24MP					M	0.10	5000	14	4.1	30	
	5015B24HP					H	0.13	6000	17	5.8	32	
	5015B24XP					X	0.18	7000	19	7.1	35	
	6015B12LP				DC12V	L	0.08	3000	16.3	3.4	29	
	6015B12MP					M	0.12	3500	21.3	3.82	34	
	6015B12HP					H	0.18	4000	25.6	6.6	40	
	6015B12XP					X	0.20	4500	34.8	12.9	49	
	6015B12VP		60×60×15		V	0.24	5000	26.5	5.58	42		
	6015B24LP				L	0.07	3500	19	3.56	33		
	6015B24MP				DC24V	M	0.10	4000	21.7	4.06	37	
	6015B24HP					H	0.12	4500	23.1	4.57	40	
	6015B24XP					X	0.14	5000	26.5	5.58	42	
	6025B12LP				DC12V	L	0.12	3600	18.5	3.6	31	
	6025B12MP					M	0.16	4250	21.5	4.8	34	
	6025B12HP					H	0.35	5000	25.6	6.6	40	
	6025B12XP					X	0.40	6800	34.8	10.2	47	
	6025B24LP		60×60×25		DC24V	L	0.08	3600	18.5	3.6	31	
	6025B24MP					M	0.11	4250	21.5	4.8	34	
	6025B24HP					H	0.2	5000	25.6	6.6	40	
	6025B24XP					X	0.25	6800	34.8	10.2	47	
	6025B48LP				DC48V	L	0.06	3600	18.5	3.6	31	
	6025B48MP					M	0.07	4250	21.5	4.8	34	
	6025B48HP					H	0.12	5000	25.6	6.6	40	
	6038B24MP		60×60×38		70×70×25	DC24V	M	0.52	8000	43.1	22.9	51
	7025B24LP		L				0.05	3000	30	3.8	29	
	7025B24MP		M				0.06	3600	35.9	5.5	32	
	7025B24HP		H				0.08	4000	39.9	6.9	37	
	7025B24XP		80×80×15			DC12V	X	0.35	5500	54.8	12.7	45
	8015B12LP	00(无功能)		L			0.1	2700	27.5	2.3	30	
	8015B12MP	0F(FG脉冲输出)		M			0.12	3100	31.5	2.5	32	
	8015B12HP	0R(RD转停输出)		H			0.16	3600	37.6	3.8	36	
	8015B12XP	0Rb(反RD转停输出)		X		0.3	4500	45.2	5.3	43		
	8015B24LP	0Rb(反RD转停输出)		DC24V		L	0.06	2700	27.5	1.3	30	
	8015B24MP	1F(FG+PWM调速)				M	0.08	3100	31.5	2.3	32	
	8015B24HP	1R(RD+PWM调速)				H	0.1	3600	37.6	2.5	36	
	8025B12LP	1Rb(反RD转停输出+PWM调速)			DC12V	L	0.19	3000	35.4	3.6	33	
	8025B12MP			M		0.23	3600	42.4	5.1	38		
	8025B12HP			H		0.32	4300	50.5	6.9	43		
	8025B12XP		X	0.5		5000	60	9.1	48			
	8025B24LP		80×80×25	DC24V	L	0.1	3000	35.4	3.6	33		
	8025B24MP				M	0.16	3600	42.4	5.1	38		
	8025B24HP				H	0.23	4300	50.5	6.9	43		
	8025B24XP				X	0.25	5000	60	9.1	48		
	8025B48LP			DC48V	L	0.06	3000	35.4	3.6	33		
	8025B48MP				M	0.09	3600	42.4	5.1	38		
	8025B48HP				H	0.13	4300	50.5	6.9	43		
	8025B48XP				X	0.21	5000	60	9.1	48		
	8038B12LP		80×80×38	DC12V	L	0.40	4200	58.2	10.4	45		
	8038B12MP				M	0.76	5600	78.8	19.3	53		
	8038B12HP				H	1	6100	84.8	22.6	56		
	8038B12XP				X	1.5	7500	105.5	34.6	62		
	8038B24LP			DC24V	L	0.25	4200	58.2	9.3	45		
	8038B24MP				M	0.35	5600	78.8	17.2	53		
	8038B24HP				H	0.45	6100	84.8	20.1	56		
	8038B24XP				X	0.82	7500	105.5	29.5	62		
	9225B12LP			92×92×25	DC12V	L	0.11	2450	44.8	3.0	30	
	9225B12MP					M	0.14	2850	52.1	4.3	34	
	9225B12HP					H	0.20	3200	58.3	5.6	38	
	9225B12XP					X	0.30	3800	69.2	7.1	45	
	9225B24LP		DC24V		L	0.08	2450	44.8	3.0	25		
	9225B24MP				M	0.13	2850	52.1	4.3	30		
	9225B24HP				H	0.15	3200	56.8	5.6	38		
	9225B24XP				X	0.2	3800	69.2	7.1	45		
	9238B12LP		92×92×38	DC12V	L	0.5	4300	87.9	10.2	52		
	9238B12MP				M	0.9	5000	102.1	13.5	58		
	9238B12HP				H	1.2	6000	122.5	19.7	64		
	9238B12XP				X	2.5	7000	143.1	26.8	67		
	9238B24LP			DC24V	L	0.35	4300	87.9	10.2	52		
	9238B24MP				M	0.45	5000	102.1	13.5	58		
	9238B24HP				H	0.76	6000	122.5	19.7	64		
	9238B24XP				X	1.1	7000	143.1	26.8	67		

① 转速等级：L-低，M-标准，H-高，X-超高，V-极高。

风扇

标准型 · DC轴流风扇

散热风扇

型号		输出功能	长×宽×高	适用配件	输入电压	转速等级	电流(A)	转速(RPM)	风量(CFM)	风压(mm-H ₂ O)	噪音(Db[A])
代码	规格										
ZHJ67	1225B12LP		120×120×25		DC12V	L	0.3	2500	77.2	5.8	39
	1225B12MP					M	0.48	2800	86.7	7.1	42
	1225B12HP					H	0.5	3400	103.9	10.2	47
	1225B12XP					X	0.62	3700	114.8	11.7	50
	1225B12VP					V	0.65	4000	121.1	13.0	52
	1225B24LP				DC24V	L	0.17	2500	77.2	5.8	39
	1225B24MP					M	0.23	2800	86.7	7.1	42
	1225B24HP					H	0.28	3400	103.9	10.2	47
	1225B24XP					X	0.30	3700	114.8	11.7	50
	1225B24VP					V	0.40	4000	121.1	13.0	52
	1225B48LP		120×120×38		DC48V	L	0.10	2500	56.9	5.8	39
	1225B48MP					M	0.11	2800	69.6	7.1	42
	1225B48HP					H	0.12	3400	99	10.2	47
	1238B12LP				DC12V	L	0.14	2300	101.4	8.1	38
	1238B12MP					M	0.3	2600	114.7	10.4	41
	1238B12HP					H	0.48	2900	123.2	11.4	44
	1238B12XP					X	0.62	3200	135.9	13.7	48
	1238B12VP					V	0.85	4200	178.4	23.9	54
	1238B24LP				DC24V	L	0.14	2300	101.4	8.1	38
	1238B24MP					M	0.25	2600	114.7	10.4	41
	1238B24HP	00(无功能)				H	0.3	2900	123.2	11.4	44
	1238B24XP	0F(FG脉冲输出)		防护网ZHJ42		X	0.48	3200	135.9	13.7	44
	1238B24VP	0R(RD转停输出)		或		V	0.8	5000	172	23.9	60
	1238B48LP	0Rb(反RD转停输出)	150×150×50	过滤网ZHJ41	DC48V	L	0.1	2300	101.4	8.1	38
	1238B48MP	1F(FG+PWM调速)		或		M	0.14	2600	114.7	10.4	41
	1238B48HP	1R(RD+PWM调速)		百叶窗ZHJ43		H	0.25	2900	123.2	11.4	44
	1238B48XP	1Rb(反RD转停输出+PWM调速)				X	0.3	3200	135.9	13.7	48
	1238B48VP					V	0.48	4200	178.4	23.9	54
	1550B24LP				DC24V	L	0.6	2600	176.2	13.3	54
	1550B24MP					M	0.75	2800	189.7	15.5	55.5
	1550B24HP					H	0.9	3200	216.8	20.2	58.5
	1550B24XP					X	1.2	3600	243.9	25.5	61
	1550B24VP					V	1.7	4000	271	31.5	63
	1550B48LP		172×150×51		DC48V	L	0.3	2800	189.7	15.5	55.5
	1550B48MP					M	0.5	3200	216.8	20.2	58.5
	1550B48HP					H	0.6	3600	243.9	25.5	61
	1550B48XP					X	0.8	4000	271	31.5	63
	1550B48VP					V	1	4400	298.1	38.1	65
	1751B24LP				DC24V	L	0.8	3500	263	20.84	57
	1751B24MP					M	1.25	4000	291	23.12	62
	1751B24HP					H	1.55	4400	323	26.93	64
	1751B24XP					X	1.85	4800	350	31.51	66
	1751B24VP					V	2.25	5200	378	34.55	68
	1751B48LP				DC48V	L	0.5	3500	263	20.84	57
	1751B48MP					M	0.8	4000	323	26.93	62
	1751B48HP					H	0.95	4800	350	31.51	66
	1751B48XP					X	1.3	5200	378	34.55	68
	1751B48VP					V	2.3	6500	472	53.82	73

① 转速等级：L-低，M-标准，H-高，X-超高，V-极高。

② 性能参数

期望寿命	70000H, 在40°C, 15%~65%的湿度下
框叶材质	塑料: 阻燃材料, P.B.T(黑色)UL94V-0
风扇旋转锁定	在额定电压下锁住扇叶24小时, 当锁定解除后风扇仍能正常运转
极性保护	Vcc与GND反接时, 回路不烧毁
绝缘阻抗	在本体与两条导线间加500V直流电压之间绝缘阻抗10MΩ以上
绝缘耐压	5mA Max/导线与外框之间测量, 500VAC/min
工作温度	-10°C ~ +70°C
工作湿度	15~65%RH
储存温度	-40°C ~ +70°C
储存湿度	15~65%RH



请按图示订货

型号		输出功能
代码	规格	
1225B12LP		00(无功能)
1225B12MP		0F(FG脉冲输出)
1225B12HP		0R(RD转停输出)

ZHJ67 — 1225B12LP — 0F