


锁紧螺母

缩紧锁紧型

代码	类型	材质		热处理	表面处理
		国标	相当		
BKC01	缩紧锁紧型	45	S45C	28~32HRC	发黑

特点：该产品通过螺母本身的弹性变形，使螺纹面紧密贴合于外螺纹，实现轴向强力紧固。其锁紧能力优异，适用于易松脱、高扭矩、工作条件恶劣的场合。

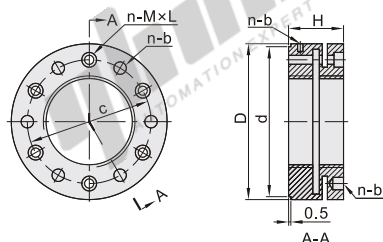

螺纹精度：ISO 4H
端面偏摆：0.005



视角标准：第一视角

型号	螺距	D	H	d	c	n-b	n-MxL	扭紧力矩 (NM)
代码	公称尺寸							
M10	0.75	24	14	22	17	3-2.5	3-M3x10	2
M12	1.0	26	14	25	19	3-3	3-M4x10	3
M15	1.0	33	31	23.5				
M17	1.5	37	34	26				
M18	1.5	38	34	28				
M20	1.0	40	18	36	30	4-4	4-M4x12	
M22	1.5	42		38	32			
M24		44			34			
M25		45		41	35			
M26								
M27		46	20	43	37		4-M4x14	
M28		48		45	39			
M30		50		47	41	4-5		3.5
M32								
M33		50		47	41			
M35		53		50	44			
M36	1.5	56	22	53	47		4-M4x16	
M38		58		55	49			
M39		60		57	51			
M40		60		57	51			
M42		68		63	57		6-M4x16	
M45		69		65	58			
M48		70		66	60			
M50	2.0	72	25	68	62		6-M4x18	
M52	1.5	75		71	65			
M55	2.0	82		77	70	6-6		
M56	1.5							
M58	2.0	84		79	72		6-M5x18	4.5
M60	1.5							
M62	2.0	86	28	82	75		6-M5x20	
M64	1.5							
M65	2.0	88		84	77			

型号	螺距	D	H	d	c	n-b	n-MxL	扭紧力矩 (NM)
代码	公称尺寸							
M65	2.0	88		84	77	6-6		
M68	1.5	93		89				
M70	2.0	95	28		82	6-7	6-M5x20	4.5
M72	1.5	97		91	84			
M75	2.0	100		94	87			
M80	1.5	110		103	95			
M85		115		108	100			
M90		120		113	105			
M95	2.0	125	32	118	110		6-M6x22	
M100		130		123	115			
M105		135		128	120	6-8		
M110		140		133	125			
M115		145	34	138	130			8
M120		155		146	136			
M125		160	36	150	140		6-M6x25	
M130	3.0	165		156	148			
M140	2.0	180	38	168	160		8-M6x25	
M150	2.0	190		178	170			
M160		205		193	182			
M170	3.0	215		204	193		8-M8x30	
M180		230		216	205			
M190		240	40	226	215	8-10		
M200		245		234	223		8-M8x25	18
M210	4.0			253			8-M8x30	
M220	3.0	265		255	243			
M230	4.0			253				
M235		275		265	251			
M240	3.0	285		270	257			
M250		285		275	261			
M250	4.0	295	42	285	271		8-M10x30	
M260	3.0	305		295	283	8-12		35
M280		325		315	303			
M300	4.0	345		335	323			



请按图示订货

型号	代码	公称尺寸	螺距	D
BKC01	M10	0.75	1	24

BKC01—M10—0.75



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

7