


一端左旋一端右旋

两端一阶型

30度梯形丝杠

代码	类型	螺纹旋向	材质		表面处理
			国标	相当	
LHR22	两端一阶型	一端左旋	45	S45C	发黑
LHR26		一端右旋	Y1Cr18Ni9	SUS303	—

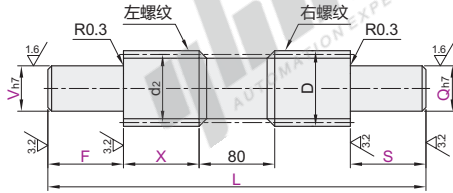

视角标准：第一视角

型号	最小单位0.5		V-Q 选择		最小单位0.5	螺距	有效直径	螺纹牙根直径 (min)	螺纹升角
代码	D	L	F-S		X	P	d ₂		
LHR22	8	154~500	3≤F≤V×8 3≤S≤Q×8	6	① 请根据使用要求指定尺寸。	1.5	7.25	5.9	3°46'
	10			6 7		2	9	7.2	4°03'
	12			6 7 8 9		3	12.5	10.1	4°22'
	14	7 8 9 10		4		14.5	12.1	3°46'	
	16	154~1200		8 9 10 12		5	16	13.1	4°33'
	18			8 9 10 12 14 15		6	18	15.1	4°03'
	20			9 10 12 14 15 16 17		7	19.5	16.1	4°40'
	22			10 12 14 15 16 17 20		8	22.5	19	4°03'
	25			10 12 14 15 16 17 20 25		9	25.5	22	3°34'
	LHR26	28		200~1200		12 14 15 16 17 20 25	10	29	24.5
32		15 16 17 20 25	11		33	28.5	3°19'		
36		16 17 20 25 30	12		37	32.5	2°57'		
40		25 30 35 40	13		46	40.4	3°10'		
50									

① Q尺寸14、20与P1588-1589数字式位置显示器配合使用。
② D=8时，2≤F≤V×7，2≤S≤Q×7



可选加工

可增加加工	增加挡圈槽	增加两平面	增加端面粗牙螺孔	增加外螺纹	增加四平面	增加键槽																																																																																																																																									
代码	AC() (V部) AQ() (Q部)	SC() (V部) SQ() (Q部)	MC() (V部) MQ() (Q部)	BV() (V部) BC() (Q部)	ZC() (V部) ZQ() (Q部)	KV() (V部) KC() (Q部)																																																																																																																																									
技术说明	<p>选型方法 AC13.3</p> <p>① 最小单位0.1</p> <p>② 挡圈槽尺寸详见P1567。</p>	<p>选型方法 SC5-SW10-SY8</p> <p>① 最小单位0.5</p>	<p>选型方法 MC24</p> <table border="1"> <tr><th>V-Q</th><th>MC-MQ选择</th></tr> <tr><td>6</td><td>3</td></tr> <tr><td>7-8</td><td>3-4</td></tr> <tr><td>9-10</td><td>3-4-5</td></tr> <tr><td>12-14</td><td>3-4-5-6</td></tr> <tr><td>15-16</td><td>3-4-5-6-8</td></tr> <tr><td>17-18</td><td>3-4-5-6-8-10</td></tr> <tr><td>20-22</td><td>3-4-5-6-8-10-12</td></tr> <tr><td>25-28-30</td><td>3-4-5-6-8-10-12-16</td></tr> <tr><td>32-35</td><td>3-4-5-6-8-10-12-16-20</td></tr> <tr><td>36-40-50</td><td>3-4-5-6-8-10-12-16-20-24</td></tr> </table>	V-Q	MC-MQ选择	6	3	7-8	3-4	9-10	3-4-5	12-14	3-4-5-6	15-16	3-4-5-6-8	17-18	3-4-5-6-8-10	20-22	3-4-5-6-8-10-12	25-28-30	3-4-5-6-8-10-12-16	32-35	3-4-5-6-8-10-12-16-20	36-40-50	3-4-5-6-8-10-12-16-20-24	<p>选型方法 BC20</p> <p>① BV, BC≤F, S-螺距×3</p> <table border="1"> <tr><th>V-Q</th><th>M×螺距</th></tr> <tr><td>6</td><td>M6×0.75</td></tr> <tr><td>8</td><td>M8×1.0</td></tr> <tr><td>10</td><td>M10×1.0</td></tr> <tr><td>12</td><td>M12×1.0</td></tr> <tr><td>14</td><td>M14×1.0</td></tr> <tr><td>15</td><td>M15×1.0</td></tr> <tr><td>17</td><td>M17×1.0</td></tr> <tr><td>20</td><td>M20×1.0</td></tr> <tr><td>25</td><td>M25×1.5</td></tr> <tr><td>30</td><td>M30×1.5</td></tr> <tr><td>35</td><td>M35×1.5</td></tr> <tr><td>40</td><td>M40×1.5</td></tr> </table>	V-Q	M×螺距	6	M6×0.75	8	M8×1.0	10	M10×1.0	12	M12×1.0	14	M14×1.0	15	M15×1.0	17	M17×1.0	20	M20×1.0	25	M25×1.5	30	M30×1.5	35	M35×1.5	40	M40×1.5	<p>选型方法 ZC10-W8-A8</p> <p>① 最小单位0.5</p> <p>② A=5~20</p> <p>ZC=V, ZQ=Q (W:最小单位1)</p> <table border="1"> <tr><th>V-Q</th><th>6-7</th><th>5</th></tr> <tr><td>8</td><td>6</td><td></td></tr> <tr><td>9</td><td>7</td><td></td></tr> <tr><td>10</td><td>8</td><td></td></tr> <tr><td>12</td><td>9</td><td>10</td></tr> <tr><td>14-15</td><td>10</td><td>11</td></tr> <tr><td>17</td><td>11</td><td>12</td></tr> <tr><td>20</td><td>12</td><td>13</td></tr> <tr><td>25</td><td>14</td><td>15</td></tr> <tr><td>30</td><td>17</td><td>20</td></tr> <tr><td>35</td><td>21</td><td>24</td></tr> <tr><td>40</td><td>25</td><td>28</td></tr> <tr><td></td><td>29</td><td>30</td></tr> </table>	V-Q	6-7	5	8	6		9	7		10	8		12	9	10	14-15	10	11	17	11	12	20	12	13	25	14	15	30	17	20	35	21	24	40	25	28		29	30	<p>选型方法 KV8-C10</p> <p>① 最小单位0.5</p> <p>② KV(KC)=0时，键槽形状如上图：</p> <table border="1"> <tr><th colspan="5">轴键槽尺寸</th></tr> <tr><th>V-Q</th><th>b1</th><th>t1</th><th>r1</th><th></th></tr> <tr><td>6-7</td><td>2</td><td>1.2</td><td></td><td></td></tr> <tr><td>8-10</td><td>3</td><td>1.8</td><td>0.08</td><td></td></tr> <tr><td>11-12</td><td>4</td><td>2.5</td><td>+0.1</td><td>-0.16</td></tr> <tr><td>13-17</td><td>5</td><td>3.0</td><td></td><td></td></tr> <tr><td>18-22</td><td>6</td><td>3.5</td><td>0.16</td><td></td></tr> <tr><td>23-30</td><td>8</td><td>4.0</td><td>-0.25</td><td></td></tr> <tr><td>31-38</td><td>10</td><td>5.0</td><td>+0.2</td><td>0.25</td></tr> <tr><td>39-40</td><td>12</td><td>5.0</td><td>-0.40</td><td></td></tr> </table>	轴键槽尺寸					V-Q	b1	t1	r1		6-7	2	1.2			8-10	3	1.8	0.08		11-12	4	2.5	+0.1	-0.16	13-17	5	3.0			18-22	6	3.5	0.16		23-30	8	4.0	-0.25		31-38	10	5.0	+0.2	0.25	39-40	12	5.0	-0.40	
V-Q	MC-MQ选择																																																																																																																																														
6	3																																																																																																																																														
7-8	3-4																																																																																																																																														
9-10	3-4-5																																																																																																																																														
12-14	3-4-5-6																																																																																																																																														
15-16	3-4-5-6-8																																																																																																																																														
17-18	3-4-5-6-8-10																																																																																																																																														
20-22	3-4-5-6-8-10-12																																																																																																																																														
25-28-30	3-4-5-6-8-10-12-16																																																																																																																																														
32-35	3-4-5-6-8-10-12-16-20																																																																																																																																														
36-40-50	3-4-5-6-8-10-12-16-20-24																																																																																																																																														
V-Q	M×螺距																																																																																																																																														
6	M6×0.75																																																																																																																																														
8	M8×1.0																																																																																																																																														
10	M10×1.0																																																																																																																																														
12	M12×1.0																																																																																																																																														
14	M14×1.0																																																																																																																																														
15	M15×1.0																																																																																																																																														
17	M17×1.0																																																																																																																																														
20	M20×1.0																																																																																																																																														
25	M25×1.5																																																																																																																																														
30	M30×1.5																																																																																																																																														
35	M35×1.5																																																																																																																																														
40	M40×1.5																																																																																																																																														
V-Q	6-7	5																																																																																																																																													
8	6																																																																																																																																														
9	7																																																																																																																																														
10	8																																																																																																																																														
12	9	10																																																																																																																																													
14-15	10	11																																																																																																																																													
17	11	12																																																																																																																																													
20	12	13																																																																																																																																													
25	14	15																																																																																																																																													
30	17	20																																																																																																																																													
35	21	24																																																																																																																																													
40	25	28																																																																																																																																													
	29	30																																																																																																																																													
轴键槽尺寸																																																																																																																																															
V-Q	b1	t1	r1																																																																																																																																												
6-7	2	1.2																																																																																																																																													
8-10	3	1.8	0.08																																																																																																																																												
11-12	4	2.5	+0.1	-0.16																																																																																																																																											
13-17	5	3.0																																																																																																																																													
18-22	6	3.5	0.16																																																																																																																																												
23-30	8	4.0	-0.25																																																																																																																																												
31-38	10	5.0	+0.2	0.25																																																																																																																																											
39-40	12	5.0	-0.40																																																																																																																																												



请按图示订货

型号	D	L	F-S	V-Q 选择	X
LHR22	12	154~1000	3≤F≤V×8	6 7 8 9	① 请根据使用要求指定尺寸。
LHR26	14	154~1000	3≤S≤Q×8	7 8 9 10	

LHR22—D14—L201—F8—S10—V10—Q7—X40

可选加工

型号	D	L	F-S	V-Q 选择	X	可选加工代码
LHR22	12	154~1000	3≤F≤V×8	6 7 8 9	① 请根据使用要求指定尺寸。	AC() SC()...
LHR26	14	154~1000	3≤S≤Q×8	7 8 9 10		

LHR22—D14—L201—F10—S10—V10—Q7—X40—AC7



未标价(元)

优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

8

丝杠相关零件

E5