


内六角螺栓型  
 紧定螺钉型  
 角座型

# 无弹簧定位珠

## 内六角螺栓型

代码	类型	主体			球头	
		材质	硬度	表面处理	材质	硬度
PKZ01	内六角螺栓型	SCM435	35~45HRC	发黑	SUJ2	53~60HRC
PKZ03		SUS304	—	—	SUS440C	55HRC~




型号	公称尺寸	L	L <sub>1</sub>	D	K	S	h	d	H	耐负载 (kN)	
PKZ01 PKZ03	4	10	10.5	2.1	7	4	3	2	2.5	0.8	1.3
		12	12.5								
		16	16.5								
		20	20.5								
		25	25.5								
		30	30.6								
	5	12	12.6	2.4	8.5	5	4	2.5	3	1	1.4
		16	16.6								
		20	20.6								
		25	25.6								
		30	30.6								
		40	40.8								
6	16	16.8	3	10	6	5	3	4	1.3	3.3	
	20	20.8									
	25	25.8									
	30	30.8									
	40	40.8									
	50	51.2									
PKZ01 PKZ03	8	20	21.2	3.5	13	8	6	4	5.5	1.8	3.9
		30	31.2								
		35	36.2								
		40	41.2								
		50	51.2								
		60	61.7								
	10	25	26.7	4.5	16	10	8	5	7	2.3	3.4
		30	31.7								
		40	41.7								
		50	51.7								
		60	61.7								
		80	82								
12	30	32	5	18	12	10	6	8.5	2.8	4.8	
	50	52									
	60	61.7									
	80	82									
	100	102									
	120	122									

kgf=N×0.101972

## 紧定螺钉型

代码	类型	主体			球头	
		材质	硬度	表面处理	材质	硬度
PKZ11	紧定螺钉型	SCM435	35~45HRC	发黑	SUJ2	53~60HRC
PKZ13		SUS304	—	—	SUS440C	55HRC~
PKZ15		相当40Cr	48HRC~	发黑	相当SUS440C	50~55HRC

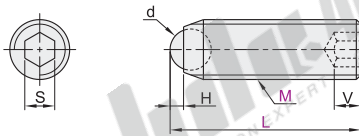

型号	公称尺寸	L	d	S	V	H	耐负载 (kN)							
PKZ11 PKZ13	3	5.2	10.2	1.5	1.5	1.2	0.5	0.5						
		4	6.5	10.5	16.5	2.5	2	0.8	1.3					
		5	8.6	12.6	20.6	3	2.5	1	1.4					
		6	10.8	16.8	20.8	25.8	4	3	3.5	1.3	3.3			
		8	11.2	13.2	21.2	26.2	31.2	5.6	4	5(2.5)	1.8	3.9		
		10	13.7	17.7	21.7	26.7	36.7	7.1	5	6(3.5)	2.3	3.4		
	PKZ11 PKZ13	12	18	22	32	42	8.7	6	8(3)	2.8	4.8			
			PKZ15	3	5.2	10.2	1.5	1.5	2	0.5	0.5			
					4	6.5	10.5	16.5	2.38	2	2.5	0.7	1.3	
					5	8.6	12.6	20.6	3	2.5	3	0.9	1.4	
					6	10.8	16.8	20.8	25.8	3.5	3	3.5	1.2	3.3
					8	11.2	13.2	21.2	26.2	5	4	5	1.7	3.9
10	13.7	17.7			21.7	26.7	7.1	5	6(3.5)	2.3	3.4			



kgf=N×0.101972

带 \* L 尺寸的 V 尺寸为 ( ) 内尺寸。

kgf=N×0.101972

## 角座型

代码	类型	主体			挡块	
		材质	硬度	表面处理	材质	硬度
PKZ21	角座型	SCM435	38~43HRC	发黑	SUJ2	55HRC~
PKZ23		SUS304	—	—	SUS440C	—
PKZ25		相当40Cr	48HRC~	发黑	相当SUS440C	50~55HRC



型号	公称尺寸	L	d	S	V	H	耐负载 (kN)					
PKZ21	4	6	10	16	2	2	0.3	1.3				
		5	8	12	20	2.5	2.5	0.4	1.4			
		6	10	16	20	25	3.2	3	3.5	0.6	3.3	
		8	10* 12	20	25	30	4.5	4	5(2.5)	0.8	3.9	
		10	12* 16	20	25	35	6	5	6(3.5)	1	4.8	
		12	16* 20	30	40	7.2	6	8(3)	1	4.8		
PKZ21	16	20* 25	35	50	10.7	8	10(3)	1.3	8.9			
		PKZ25	4	6	10	16	2	2	2.5	0.3	1.3	
				5	8	12	20	2.5	2.5	3	0.4	1.4
				6	10	16	25	3.2	3	3.5	0.6	3.3
				8	12	20	25	4.5	4	5	0.8	3.9
				10	16	25	35	6	5	6	1	4.8
12	20			30	40	7.2	6	8	1	4.8		

kgf=N×0.101972

带 \* L 尺寸的 V 尺寸为 ( ) 内尺寸。

kgf=N×0.101972

## 内六角螺栓型

型号	公称尺寸
PKZ01	10
PKZ03	12

## 角座型

型号	公称尺寸
PKZ21	4
PKZ23	5
PKZ25	6



PKZ01—M4—12

PKZ21—M4—L10



## 优惠价

数量	1~200	201~
价格	100%	另行报价

PKZ21/23



## 优惠价

数量	1~9	10~
价格	100%	另行报价

其余



## 交货期

7

定向零件

A7