


圆皮带用滑轮

◀ 夹紧型 · U形槽

代码	类型	U形槽	材质		表面处理
			国标	相当	
ENS21	夹紧型	U形槽	45	S45C	发黑
ENS31			铝合金		喷细砂本色阳极氧化

① 3D模型仅供参考，具体尺寸请以参数表为准，注意选型。

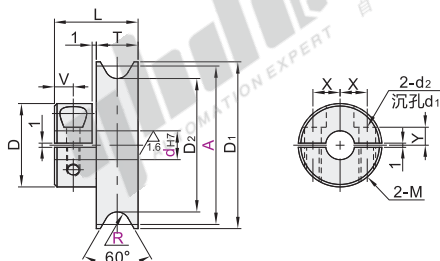

① M=M3时, $d_1=\varnothing 6.5$ $d_2=\varnothing 3.5$
M=M4时, $d_1=\varnothing 8$ $d_2=\varnothing 4.5$

视角标准：第一视角

型号	A	R	dH7选择	D	D1	D2	L	T	V	X	Y	M	适用皮带直径
代码													
20			4 5	16	22	18				5	3		
30	1		4 5 6 6.35 8	20	32	28	11	5		7	3.5	M3	2
40					42	38			2.5				
30		1.5	4 5 6 6.35 8	20	32	27	16			7	3.5	M3	
40					42	37							3
45			4 5 6 6.35 8 10 11 12	25	47	42	20		4.5	9	4.5	M4	
60					62	57							
23					25	19							
28			4 5 6 6.35 8	20	30	24	16		2.5	7	3.5	M3	
30					32	26							
40		2			42	36							4
45					47	41							
48			4 5 6 6.35 8 10 11 12	25	50	44	20		4.5	9	4.5	M4	
60					62	56							
80					82	76							
28			4 5 6 6.35 8	20	30	23	16	10	2.5	7	3.5	M3	
40					42	35							
48					50	43							
50		2.5	4 5 6 6.35 8 10 11 12	25	52	45	20		4.5	9	4.5	M4	5
60					62	55							
75					77	70							
80					82	75							
28			4 5 6 6.35 8	20	30	22	16		2.5	7	3.5	M3	
38			4 5 6 6.35		40	32				6.5			
48					50	42							
50					52	44							
58		3			60	52	20		4.5	9	4.5	M4	6
60			4 5 6 6.35 8 10 11 12	25	62	54							
75					77	69							
95					97	89							
100					102	94							

② 可选加工



型号	代码	A	R	dH7选择
ENS21	20		1.5	4 5
ENS31	30		1.5	4 5 6 6.35 8

ENS21—A20—R1—d5

型号	代码	A	R	dH7选择	可选加工代码
ENS21	20		1.5	4 5	DC
ENS31	30		1.5	4 5 6 6.35 8	

ENS21—A20—R1—d5—DC



优惠价	数量	1~9	10~
价格	100%	另行报价	



交货期	1
-----	---



代码	技术说明										
DC	切割D₁尺寸 选型方法 DC ① 切割D₁尺寸，减小外径。 ② 外经切割的加工面可能不进行表面处理。 ③ 适用皮带半径R1/R1.5/R2/R2.5。 适用皮带半径R <table> <tr> <td>DC</td> <td></td> </tr> <tr> <td>1</td> <td>A+0.8</td> </tr> <tr> <td>1.5</td> <td>A+1.2</td> </tr> <tr> <td>2</td> <td>A+1.6</td> </tr> <tr> <td>2.5</td> <td>A+1.8</td> </tr> </table>	DC		1	A+0.8	1.5	A+1.2	2	A+1.6	2.5	A+1.8
DC											
1	A+0.8										
1.5	A+1.2										
2	A+1.6										
2.5	A+1.8										