

ISO标准矩形弹簧

中载荷弹簧(蓝色)

代码	类型	材质	最大压缩量
YSIM	中载荷型	SWOSC-V	L×37.5%

L尺寸公差

L	公差
89以下	±1
102以上	±1%

① 载荷(±10%)


① 直角度(3°以下)

① 负载(N)=弹簧常数(N/mm)×压缩量

① 理论使用次数: 30万次(L×25%为100万次)

① 弹簧颜色和圈数可能会因生产批次不同而异, 但产品性能均符合标准, 不影响使用!

① 参考标准 ISO 10243-2019

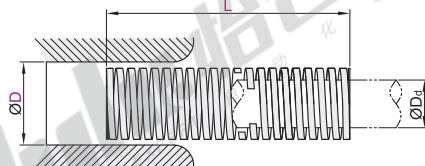

视角标准: 第一视角

型号			轴径 Dd	弹簧常数 N/mm	使用方法 30万次 F=L×37.5%	
代码	孔径D	长度L			Fmm	负载N
YSIM	10	25	5	16	9.4	150.4
		32		13	12	156
		38		11.9	14.2	169
		44		10.3	16.5	170
		51		8.9	19.1	170
		64		7.5	24	180
	12.5	76	6.3	6.2	28.5	176.7
		305		1.6	114	182.4
		25		30	9.4	282
		32		24.8	12	297.6
		38		21.4	14.2	303.9
		44		18	16.5	297
YSIM	16	51	8	15.5	19.1	296.1
		64		12.1	24	290.4
		76		10.2	28.5	290.7
		89		8.4	33.3	279.7
		305		2.4	114	273.6
		25	10	49.4	9.4	464.4
	20	32		38.5	12	462
		38		33.9	14.2	481.4
		44		30	16.5	495
		51		26.4	19.1	504.2
		64		20.5	24	492
YSIM	25	76	12.5	17.8	28.5	507.3
		89		15.2	33.3	506.2
		102		13.5	38.2	515.7
		305		4.3	114	490.2
		25	15	98	9.4	921.2
	30	32		72.6	12	871.2
		38		56	14.2	795.2
		44		47.5	16.5	783.8
		51		41.7	19.1	796.5
		64		32.3	24	775.2
		76		25.1	28.5	715.4
YSIM	35	89	20	22	33.3	732.6
		102		19.8	38.2	756.4
		115		18.1	43.1	780.1
		127		16.6	47.6	790.2
		139		15.1	52.1	786.7
		152		13.2	57	752.4
	40	305	25	6.1	114	695.4
		25		157	9.4	1476
		32		118	12	1416
		38		93	14.2	1321
		44		80.8	16.5	1333
		51		68.6	19.1	1310
YSIM	50	64	30	53	24	1272
		76		43.2	28.5	1231
		89		38.2	33.3	1272
		102		33	38.2	1261
		115		28	43.1	1207
		127		25.9	47.6	1233
	60	139	35	23.2	52.1	1209
		152		20.8	57	1186
		178		17.8	66.7	1187
		203		15.7	66.7	1187
		229		13.7	66.7	1187
		254		11.7	66.7	1187

型号			轴径 Dd	弹簧常数 N/mm	使用方法 30万次 F=L×37.5%	
代码	孔径D	长度L			Fmm	负载N
YSIM	25	203	12.5	15.8	76.1	1202
		305		10.2	114	1163
		38		185	14.2	2627
		44		158	16.5	2607
		51		134	19.1	2559
		64		99	24	2376
	32	76	16	80.5	28.5	2294
		89		69.1	33.3	2301
		102		58.8	38.2	2246
		115		51.5	43.1	2220
		127		44.8	47.6	2132
		139		42.3	52.1	2204
YSIM	40	152	20	37.8	57	2155
		178		32.5	66.7	2168
		203		28.9	76.1	2199
		254		22.2	95.2	2113
		305		18.3	114	2086
		51	25	182	19.1	3476
	50	64		140	24	3360
		76		108	28.5	3078
		89		90.7	33.3	3020
		102		81	38.2	3094
		115		71.8	43.1	3095
YSIM	60	127	30	62.7	47.6	2985
		139		57.5	52.1	2996
		152		51.6	57	2941
		178		44.1	66.7	2941
		203		36.7	76.1	2793
		254		30.1	95.2	2866
	80	305	35	24.6	114	2804
		64		209	24	5016
		76		168	28.5	4788
		89		140	33.3	4662
		102		119	38.2	4546
		115		106	43.1	4569
YSIM	100	127	40	97	47.6	4617
		139		87	52.1	4533
		152		80	57	4560
		178		69.5	66.7	4636
		203		59.8	76.1	4551
		229		50.9	85.8	4367
	120	254	45	46	95.2	4379
		305		38.6	114	4400
		76		320	28.5	9120
		89		260	33.3	8658
		102		221	38.2	8442
		115		187	43.1	8060
YSIM	150	127	50	168	47.6	7997
		152		136	57	7752
		178		114	66.7	7604
		203		100	76.1	7610
		229		89.2	85.8	7653
		254		78.4	95.2	7464
	200	305	60	64.7	114	7376
		76		520	28.5	18240
		89		416	33.3	17616
		102		355	38.2	17082
		115		304	43.1	16548
		127		273	47.6	16014

氮气
弹簧

C4



请按图示订货 YSIM—D10—L25

型号	代码	孔径D	长度L
YSIM	10	25	32



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

7