

无油线性滑板

尺寸选择型 · 沉孔型


高力黄铜/高强度黄铜 线性滑板厚度10

高力黄铜

代码	类型	线性滑板厚度	材质
OBJ11	尺寸选择型 沉孔型	10	高力黄铜(SP2) 镶嵌固体润滑剂



RoHS10

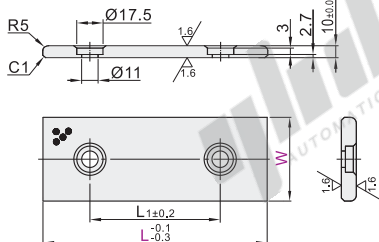


① W=28、38时仅纵向R为R2

② 滑动方向 →

③ W=28、38时仅纵向 (L方向)

④ 适用螺钉: TAF01-M10-L20

⑤ 附带螺钉, 无需另行购买。



型号	代码	W	L	L1
OBJ11	28	75	45	
		100	50	
		125	75	
		150	100	
	38	75	45	
		100	50	
		125	75	
		150	100	
	48	75	45	
		100	50	
		125	75	
		150	100	
	58	75	45	
		100	50	
		125	75	
		150	100	

型号	代码	W	L	L1
OBJ11	75	75	25	
		100	50	
		125	75	
		150	100	
	100	75	25	
		100	50	
		125	75	
		150	100	
	125	75	25	
		100	50	
		125	75	
		150	100	



OBJ11—W28—L75



数量	1~9	10~
价格	100%	另行报价



数量	1~9	10~
价格	100%	另行报价




高强度黄铜

代码	类型	线性滑板厚度	材质
OBJ12	尺寸选择型 沉孔型	10	高强度黄铜 镶嵌固体润滑剂



W=50~70

W=80~120



型号	代码	W	L	安装孔
OBJ12	50	50	30	
		70	40	
		80	40	
		100	40	
	70	50	30	
		70	40	
		80	40	
		100	40	
	80	50	30	
		70	40	
		80	40	
		100	40	
	100	50	30	
		70	40	
		80	40	
		100	40	
	120	50	30	
		70	40	
		80	40	
		100	40	



OBJ12—W50—L30

型号	代码	W	L
OBJ12	50	50	30



数量	1~9	10~
价格	100%	另行报价



数量	1~9	10~
价格	100%	另行报价

无油衬套

E1