


| 代码      | 类型     | 材质     |    | 表面处理 |
|---------|--------|--------|----|------|
|         |        | 螺杆     | 底座 | 螺杆   |
| E-WAG01 | 全尼龙底座型 | S45C   | PA | 镀铬   |
| E-WAG11 |        | SUS304 | PA | —    |


特点

- 底部材质为增强尼龙 (PA6)，有良好的减震及耐磨作用；
- 底部配有橡胶垫，能进一步巩固产品防滑能力；
- 螺杆使用球头和底座之间进行连接，可进行万向幅度转动，用于不平衡地面保持设备平行。

① 标准螺杆长度以25mm为一个梯度，可根据客户要求定制长度，需要注意定制长度后，切短的面无表面处理，碳钢会喷漆防锈。

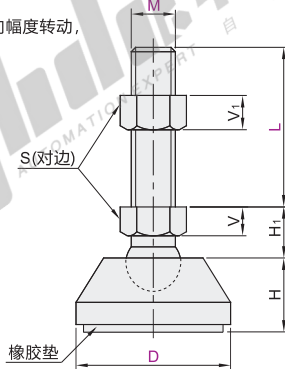

① 请根据脚杯螺杆尺寸M进行相关配件选择，详见脚杯可选配件汇总。



| 代码                 | 型号  | D   | M   | L    | 螺距   | S    | H    | H <sub>1</sub> | V    | V <sub>1</sub> | 垂直承载能力 (Kg) | 参考重量(Kg/pcs) |         |      |      |      |
|--------------------|-----|-----|-----|------|------|------|------|----------------|------|----------------|-------------|--------------|---------|------|------|------|
|                    |     |     |     |      |      |      |      |                |      |                |             | E-WAG01      | E-WAG11 |      |      |      |
| E-WAG01<br>E-WAG11 | 40  | 40  | 10  | 50   | 1.5  | 17   | 10.3 | 7              | 8    | 175            | 0.07        | 0.07         |         |      |      |      |
|                    |     |     |     | 100  |      |      |      |                |      |                | 0.09        | 0.11         |         |      |      |      |
|                    |     |     | 12  | 30   | 1.75 | 19   |      |                |      |                | 18          | 11.3         | 8       | 10   | 0.07 | 0.07 |
|                    |     |     |     | 50   |      |      |      |                |      |                |             |              |         |      | 0.08 | 0.11 |
|                    |     |     | 100 | 100  | 2    | 22   |      |                |      |                | 12.3        | 9            | 11      | 0.12 | 0.18 |      |
|                    |     |     |     | 150  |      |      |      |                |      |                |             |              |         | 0.1  | 0.12 |      |
|                    | 50  | 50  | 10  | 50   | 1.5  | 17   | 8.3  | 7              | 8    | 175            | 0.14        | 0.16         |         |      |      |      |
|                    |     |     |     | 100  |      |      |      |                |      |                | 0.08        | 0.08         |         |      |      |      |
|                    |     |     | 12  | 100  | 1.75 | 19   |      |                |      |                | 9.3         | 8            | 10      | 0.11 | 0.1  |      |
|                    |     |     |     | 150  |      |      |      |                |      |                |             |              |         | 0.13 | 0.13 |      |
|                    |     |     | 150 | 30   | 2    | 24   |      |                |      |                | 11.3        | 10           | 13      | 0.08 | 0.07 |      |
|                    |     |     |     | 50   |      |      |      |                |      |                |             |              |         | 0.1  | 0.1  |      |
|                    | 100 | 100 | 2   | 24   | 11.3 | 10   | 13   | 0.13           | 0.15 |                |             |              |         |      |      |      |
|                    |     | 150 |     |      |      |      |      | 0.17           | 0.18 |                |             |              |         |      |      |      |
|                    | 60  | 60  | 10  | 50   | 1.5  | 17   | 14.9 | 7              | 8    | 250            | 0.17        | 0.08         |         |      |      |      |
|                    |     |     |     | 100  |      |      |      |                |      |                | 0.22        | 0.11         |         |      |      |      |
|                    |     |     | 12  | 100  | 1.75 | 19   |      |                |      |                | 22.5        | 15.9         | 8       | 10   | 0.3  | 0.19 |
|                    |     |     |     | 150  |      |      |      |                |      |                |             |              |         |      | 0.16 | 0.15 |
|                    |     |     | 14  | 100  | 2    | 22   |      |                |      |                | 16.9        | 9            | 11      | 0.12 | 0.11 |      |
|                    |     |     |     | 150  |      |      |      |                |      |                |             |              |         | 0.15 | 0.16 |      |
|                    | 50  | 50  | 2   | 24   | 17.9 | 10   | 13   | 0.18           | 0.19 |                |             |              |         |      |      |      |
|                    |     | 100 |     |      |      |      |      | 0.14           | 0.13 |                |             |              |         |      |      |      |
|                    | 350 | 350 | 16  | 50   | 2.5  | 27   | 19.9 | 12             | 15   | 350            | 0.16        | 0.19         |         |      |      |      |
|                    |     |     |     | 100  |      |      |      |                |      |                | 0.2         | 0.1          |         |      |      |      |
| 18                 |     |     | 50  | 2.5  | 30   | 20.9 |      |                |      |                | 13          | 16           | 0.21    | 0.17 |      |      |
|                    |     |     | 100 |      |      |      |      |                |      |                |             |              | 0.24    | 0.24 |      |      |
| 100                |     |     | 100 | 2.5  | 30   | 20.9 |      |                |      |                | 13          | 16           | 0.3     | 0.3  |      |      |
|                    |     |     | 150 |      |      |      |      |                |      |                |             |              | 0.21    | 0.13 |      |      |
| 50                 | 50  | 2.5 | 30  | 20.9 | 13   | 16   | 0.25 | 0.16           |      |                |             |              |         |      |      |      |
|                    | 100 |     |     |      |      |      | 0.37 | 0.32           |      |                |             |              |         |      |      |      |
| 150                | 150 | 2.5 | 30  | 20.9 | 13   | 16   | 0.47 | 0.48           |      |                |             |              |         |      |      |      |



| 型号      | D  | M  | L   |
|---------|----|----|-----|
| E-WAG01 | 40 | 12 | 50  |
| E-WAG11 | 40 | 12 | 100 |

E-WAG01—D40—M12—L50

可选加工

| 型号      | D  | M  | L   | 可选加工代码      |
|---------|----|----|-----|-------------|
| E-WAG01 | 40 | 12 | 50  | WS WL BS... |
| E-WAG11 | 40 | 12 | 100 |             |

E-WAG01—D40—M12—L50—WS

可选配件

| 型号      | D  | M  | L   | 可选配件代码     |
|---------|----|----|-----|------------|
| E-WAG01 | 60 | 16 | 100 | JOJP JQ... |

E-WAG01—D60—M16—L100—JO



| 优惠价 | 数量   | 1~9  | 10~ |
|-----|------|------|-----|
| 价格  | 100% | 另行报价 |     |



1



可选加工

| 代码 | 技术说明          |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
|----|---------------|--|----|----|----|----|----|---|----|---|----|----|----|----|----|----|------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|--|
| WS | 螺杆末端加工外四角<br> | 选型方法 WS<br><table border="1"> <thead> <tr> <th>M</th> <th>n</th> <th>e</th> </tr> </thead> <tbody> <tr><td>10</td><td>6</td><td></td></tr> <tr><td>12</td><td>8</td><td>10</td></tr> <tr><td>14</td><td>10</td><td>12</td></tr> <tr><td>16</td><td>12</td><td>13.5</td></tr> <tr><td>24</td><td>14</td><td>15</td></tr> <tr><td>30</td><td>18</td><td>22</td></tr> </tbody> </table>   | M  | n  | e  | 10 | 6  |   | 12 | 8 | 10 | 14 | 10 | 12 | 16 | 12 | 13.5 | 24 | 14 | 15 | 30 | 18 | 22 |    |    |    |    |    |    |    |    |    |  |  |
|    |               | M  | n  | e  |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 10 | 6             |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 12 | 8             | 10   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 14 | 10            | 12   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 16 | 12            | 13.5   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 24 | 14            | 15   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 30 | 18            | 22   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| WL | 螺杆末端加工外六角<br> | 选型方法 WL<br><table border="1"> <thead> <tr> <th>M</th> <th>n1</th> <th>e1</th> </tr> </thead> <tbody> <tr><td>10</td><td>6</td><td></td></tr> <tr><td>12</td><td>8</td><td>10</td></tr> <tr><td>14</td><td>9</td><td></td></tr> <tr><td>16</td><td>10</td><td></td></tr> <tr><td>20</td><td>13</td><td>14</td></tr> <tr><td>24</td><td>16</td><td>18</td></tr> <tr><td>30</td><td>20</td><td>21</td></tr> </tbody> </table>   | M  | n1 | e1 | 10 | 6  |   | 12 | 8 | 10 | 14 | 9  |    | 16 | 10 |      | 20 | 13 | 14 | 24 | 16 | 18 | 30 | 20 | 21 |    |    |    |    |    |    |  |  |
|    |               | M  | n1 | e1 |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 10 | 6             |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 12 | 8             | 10   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 14 | 9             |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 16 | 10            |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 20 | 13            | 14   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 24 | 16            | 18   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 30 | 20            | 21   |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| BS | 螺杆末端加工扳手槽<br> | 选型方法 BS<br><table border="1"> <thead> <tr> <th>M</th> <th>n2</th> <th>ee</th> <th>e2</th> </tr> </thead> <tbody> <tr><td>10</td><td>8</td><td>8</td><td></td></tr> <tr><td>12</td><td>10</td><td></td><td></td></tr> <tr><td>14</td><td>12</td><td>10</td><td>12</td></tr> <tr><td>16</td><td>13</td><td></td><td></td></tr> <tr><td>20</td><td>17</td><td></td><td></td></tr> <tr><td>24</td><td>20</td><td>15</td><td>18</td></tr> <tr><td>30</td><td>26</td><td></td><td></td></tr> </tbody> </table> | M  | n2 | ee | e2 | 10 | 8 | 8  |   | 12 | 10 |    |    | 14 | 12 | 10   | 12 | 16 | 13 |    |    | 20 | 17 |    |    | 24 | 20 | 15 | 18 | 30 | 26 |  |  |
|    |               | M  | n2 | ee | e2 |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 10 | 8             | 8  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 12 | 10            |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 14 | 12            | 10   | 12 |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 16 | 13            |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 20 | 17            |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 24 | 20            | 15   | 18 |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |
| 30 | 26            |  |    |    |    |    |    |   |    |   |    |    |    |    |    |    |      |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |  |  |

| 代码 | 技术说明                          |   |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
|----|-------------------------------|---|----|----|----|----|---|---|----|---|----|----|---|----|----|----|------|----|----|----|----|----|----|
| NS | 螺杆末端加工内四角<br>                 | 选型方法 NS<br><table border="1"> <thead> <tr> <th>M</th> <th>n3</th> <th>e3</th> </tr> </thead> <tbody> <tr><td>10</td><td>5</td><td></td></tr> <tr><td>12</td><td>6</td><td>10</td></tr> <tr><td>14</td><td>8</td><td>12</td></tr> <tr><td>16</td><td>10</td><td>13.5</td></tr> <tr><td>24</td><td>10</td><td>15</td></tr> <tr><td>30</td><td></td><td>20</td></tr> </tbody> </table> | M  | n3 | e3 | 10 | 5 |   | 12 | 6 | 10 | 14 | 8 | 12 | 16 | 10 | 13.5 | 24 | 10 | 15 | 30 |    | 20 |
|    |                               | M   | n3 | e3 |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 10 | 5                             |   |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 12 | 6                             | 10  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 14 | 8                             | 12  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 16 | 10                            | 13.5  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 24 | 10                            | 15  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 30 |                               | 20  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| NL | 螺杆末端加工内六角<br>                 | 选型方法 NL<br><table border="1"> <thead> <tr> <th>M</th> <th>n4</th> <th>e4</th> </tr> </thead> <tbody> <tr><td>10</td><td>4</td><td>5</td></tr> <tr><td>12</td><td>6</td><td>8</td></tr> <tr><td>14</td><td>8</td><td>10</td></tr> <tr><td>16</td><td>10</td><td>12</td></tr> <tr><td>20</td><td>12</td><td>15</td></tr> <tr><td>24</td><td>16</td><td>18</td></tr> </tbody> </table> | M  | n4 | e4 | 10 | 4 | 5 | 12 | 6 | 8  | 14 | 8 | 10 | 16 | 10 | 12   | 20 | 12 | 15 | 24 | 16 | 18 |
|    |                               | M   | n4 | e4 |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 10 | 4                             | 5   |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 12 | 6                             | 8   |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 14 | 8                             | 10  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 16 | 10                            | 12  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 20 | 12                            | 15  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| 24 | 16                            | 18  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |
| MS | 铆死底座与螺杆<br>铆死状态      正常状态<br> | 选型方法 MS<br>① 底座与螺杆铆死，可以提高底座和螺杆的连接刚度，但是底座与螺杆无法相对转动；<br>② 铆死后调节是底座也会随螺杆一起转动。<br>③ 不适用于万向类型、橡胶底座型和非铆接组装的脚杯。  |    |    |    |    |   |   |    |   |    |    |   |    |    |    |      |    |    |    |    |    |    |

- ① 请根据脚杯螺杆尺寸M进行扳手位加工参数的选择；
- ② 扳手位加工部位不带镀层，有防锈漆；
- ③ 工具可根据不同扳手位加工类型进行选择，可选用开口扳手、活动扳手、内六角扳手、内六角扳手等。



