

二阶型/引导型 大头锥角型

定位销




二阶型-标准型

代码		材质		硬度	表面处理
Dm6	Dp6	国标	相当		
YCL01	YCL21	9CrWMn	SKS3	淬火硬度58~61HRC	—
YCL02	—	0Cr18Ni9	SUS304	—	—
YCL03	YCL23	0Cr18Ni9	SUS304	镀层硬度850HV~	镀硬铬, 镀层厚度5~8μm

D尺寸公差

D	m6	p6
2~3	+0.008 +0.002	+0.012 +0.006
4~6	+0.012 +0.004	+0.020 +0.012
8~10	+0.015 +0.006	+0.024 +0.015
12~16	+0.018 +0.007	+0.029 +0.018
20	+0.021 +0.008	+0.035 +0.022

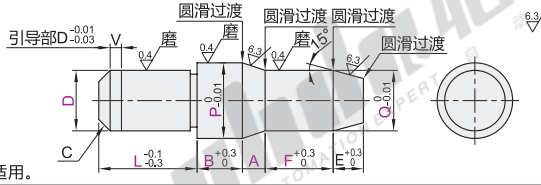

① P < Q 不适用。

型号	最小单位0.01			最小单位1	最小单位0.1			E	C	V
代码	D	P	Q	L	B	A	F			
Dm6 YCL01 YCL02 YCL03	2	2.00~4.00	1.00~3.00	2~8	2.0~6.0	1.0~3.0	2.0~6.0	1	0.3	0.5
	3	3.00~6.00	1.00~5.00	3~8	2.0~10.0	1.0~5.0	2.0~10.0	2	0.5	
	4	4.00~7.00	2.00~6.00	4~10	2.0~15.0	1.0~8.0	2.0~15.0			1.5
	5	5.00~8.00	2.00~7.00	5~12				3	1	
	6	6.00~10.00	2.00~9.00	6~15	2.0~20.0		2.0~20.0			1.5
	8	8.00~13.00	3.00~12.00	8~18						2.5
Dp6 YCL21 YCL23	10	10.00~15.00	3.00~14.00	10~22		1.0~10.0		4		
	12	12.00~16.00	5.00~15.00	12~26	3.0~20.0		3.0~20.0			
	16	16.00~25.00	10.00~24.00	16~35						
	20	20.00~30.00	13.00~29.00	20~42	5.0~20.0		5.0~20.0	5	3	



型号	最小单位0.01	最小单位1	最小单位0.1				
代码	D	P	Q	L	B	A	F
YCL01	2	3	3	3	3	3	3
YCL21	3	3	3	3	3	3	3


数量	1~4	5~
价格	100%	另行报价



① 无表面处理/无硬度
② 有表面处理

二阶型-内螺型

代码		类型	公差等级	材质		硬度	表面处理
YCL31	YCL32	二阶型	内螺型	国标	相当		
YCL31	YCL32	二阶型	内螺型	Dg6	9CrWMn	SKS3	淬火硬度58~61HRC
YCL33	—	—	—	0Cr18Ni9	SUS304	—	—
—	—	—	—	—	—	—	镀层硬度850HV~ 镀硬铬, 镀层厚度5~8μm

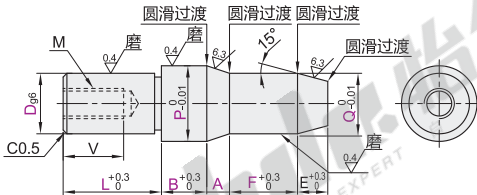

① P < Q 不适用。

D尺寸公差

D	g6
6	-0.004 -0.012
8~10	-0.005 -0.014
12~16	-0.009 -0.017
20	-0.007 -0.020



型号	最小单位0.01			最小单位1	最小单位0.1			E	M	V
代码	Dg6	P	Q	L	B	A	F			
YCL31 YCL32 YCL33	6	6.00~10.00	2.00~9.00	6~15	2.0~20.0		2.0~20.0	3	M3	5
	8	8.00~13.00	3.00~12.00	8~18					M4	
	10	10.00~15.00	3.00~14.00	10~22	3.0~20.0	1.0~10.0	3.0~20.0	4	M5	8
	12	12.00~16.00	5.00~15.00	12~26						
	16	16.00~25.00	10.00~24.00	16~35	5.0~20.0		5.0~20.0	5	M8	12
	20	20.00~30.00	13.00~29.00	20~42						



型号	最小单位0.01	最小单位1	最小单位0.1				
代码	D	P	Q	L	B	A	F
YCL31	6	8	8	8	8	8	8
YCL32	8	8	8	8	8	8	8

数量	1~4	5~
价格	100%	另行报价



① 无表面处理/无硬度
② 有表面处理

引导型

代码		类型	公差等级	材质		硬度	表面处理
YCP01	YCP02	引导型	Dg6	国标	相当		
YCP01	YCP02	引导型	Dg6	9CrWMn	SKS3	淬火硬度58~61HRC	—
YCP03	YCP04	—	—	0Cr18Ni9	SUS304	—	—
YCP05	—	—	—	9Cr18Mo	SUS440C	淬火硬度48~53HRC	—
—	—	—	—	GCr15	SUJ2	淬火硬度HRC56~	镀层硬度850HV~ 镀硬铬, 镀层厚度3~5μm


P尺寸公差表

P	g6
10	-0.005 -0.014
12~16	-0.006 -0.017
20~30	-0.007 -0.020



YCP01
YCP02
YCP03
YCP04

YCP05

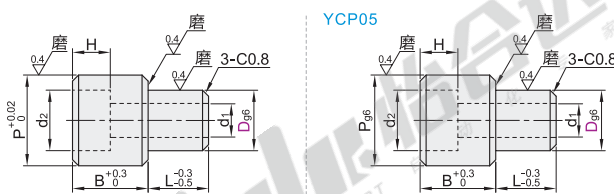


型号		Dg6		P	d1	d2	H	B	L	适用螺栓
代码										
YCP01 YCP02 YCP03 YCP04 YCP05	6	-0.004 -0.012	10	3.5	6.5	4				M3
	8	-0.005 -0.014	12	4.5	8	5				M4
	10		15	5.5	9.5	6	10	5		M5
	12		16	6.5	11	7				M6
	15	-0.006 -0.017	20	6.5	11	7				M8
	16			9	14	9				M10
20	-0.007 -0.020		11	17.5	11				M12	
25			14	20	13					



型号	D	P
YCP01	6	10
YCP02	8	12



数量	1~4	5~
价格	100%	另行报价



① 无表面处理
② 有表面处理

夹具用衬套
A6