


O 型圈

特殊线径型


代码	类型	材质	硬度(肖氏)	颜色	使用温度范围	用途
XTM61	特殊线径型	丁腈橡胶	HS70 $\pm$ 5	黑色	-20~100℃	耐矿物油用
XTM62		氟橡胶	HS75 $\pm$ 5		-10~100℃	耐高温用

特点:

- 线径、内径可按照需要选择;
- 采用一体成型制造, 气密性高。

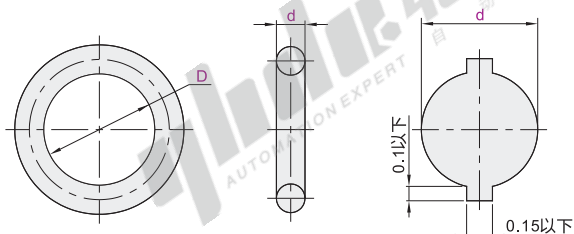

① 截面放大图



型号		d公差	D内径	D公差
代码	d			
XTM61	2.5	± 0.08	3	
			4	
			5	
			6	
			7	
			8	± 0.12
			9	
			10	
			11	
			12	
			13	
			14	
			15	
			16	
			17	
			18	
			19	
			20	± 0.22
			21	
			22	
			23	
			24	
			25	
			26	
			27	
			28	± 0.25
			29	
			30	
			31	
			32	
			33	
			34	± 0.30
			35	
			36	
			37	
			38	
			39	
			40	± 0.33
			41	
			42	
			43	
			44	
			45	± 0.38
			46	
			47	
			48	
			49	
			50	
			51	
			52	± 0.43
			53	
			54	
			55	
			56	
			57	
			58	
			59	± 0.45
			60	

型号		d公差	D内径	D公差
代码	d			
XTM61	3	± 0.08	3	
			4	
			5	
			6	
			7	
			8	± 0.12
			9	
			10	
			11	
			12	
			13	
			14	
			15	
			16	
			17	
			18	
			19	
			20	± 0.22
			21	
			22	
			23	
			24	
			25	
			26	
			27	
			28	± 0.25
			29	
			30	
			31	
			32	
			33	
			34	± 0.30
			35	
			36	
			37	
			38	
			39	
			40	± 0.33
			41	
			42	
			43	
			44	
			45	± 0.38
			46	
			47	
			48	
			49	
			50	
			51	
			52	± 0.43
			53	
			54	
			55	
			56	
			57	
			58	
			59	± 0.45
			60	

型号		d公差	D内径	D公差
代码	d			
XTM61	5	± 0.12	5	
			6	
			7	
			8	
			9	± 0.12
			10	
			11	
			12	
			13	
			14	
			15	
			16	
			17	
			18	
			19	
			20	± 0.22
			21	
			22	
			23	
			24	
			25	
			26	
			27	
			28	± 0.25
			29	
			30	
			31	
			32	
			33	
			34	± 0.30
			35	
			36	
			37	
			38	
			39	
			40	± 0.33
			41	
			42	
			43	
			44	
			45	± 0.38
			46	
			47	
			48	
			49	
			50	
			51	
			52	
			53	± 0.43
			54	
			55	
			56	
			57	
			58	
			59	± 0.45
			60	



请按图示订货



型号		D
代码	d	
XTM61	2.5	3
XTM62	2.5	4

XTM61—d2.5—D4



未税价(元)

优惠价

数量	1~50	51~
价格	100%	另行报价



交货期

9