

双轴承法兰型

带挡圈L尺寸选择型


带座轴承

类型			材质		表面处理
圆法兰	方法兰	对边法兰	轴承	轴承座	挡圈
BFP01	BFP11	BFP21	钢	S45C	弹簧钢
BFP02	BFP12	BFP22			发黑
BFP05	BFP15	BFP25			喷细砂无电解镀镍
BFP03	BFP13	BFP23			镀铬
BFP04	BFP14	BFP24	不锈钢	A2017	喷细砂本色阳极氧化
BFP06	BFP16	BFP26			—
				SUS304	—



① 由于产品批次不同，发货镀镍产品可能存在喷细砂，不影响尺寸及功能。

② 轴承精度：GB/T 307.1 0 级
相当于：JIS B 1514 0 级

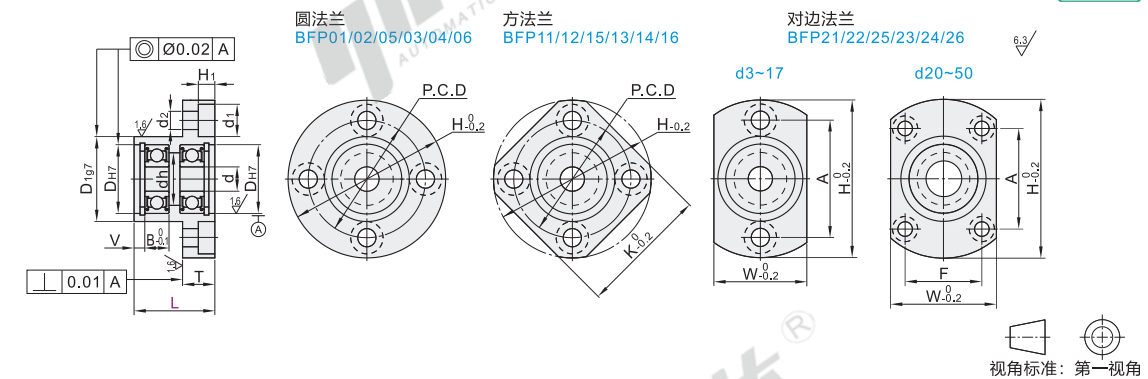

型号	L	d	DH7	B	V	H	W	T	dh	D197	P.C.D	K	A	F	d1	d2	H1
代码	轴承型号	密封圈	选择														
圆法兰	623		20 30	3	10	+0.015 0	4		33	16	7	7	14	-0.006 -0.024	24	27	24
	624		20 30	4	13				35	18	9	9	17		26	28	26
	605		20 30	5	14	+0.018 0	5		36	20	10	10	18		30	30	
	625		25 30	5	16				38	22	12	20			28	31	28
	606		20 35	6	17		2.65		39	23	13	21			29	32	29
	626		25 35	6	19		6		41	25	15	24			31	34	31
	698		25 35														
	608		25 35	8	22		7		45	29	18	27	-0.007 -0.028		35	36	35
	628		25 35		24		8.25		47	32	20	30			37	37	37
	6800		20 30	19	5				41	25	15	24			31	34	31
	6900		25 40	10	22	+0.021 0	6	2.65	45	29	19	27			35	36	35
	6000		25 40	10	26		8		50	34	22	32	-0.009 -0.034		40	39	40
方法兰	6200		30 40	30	9		9		54	38	24	36	-0.007 -0.028		44	42	44
	6801		25 35	21	5				44	29	17	26			34	35	34
	6901		25 40	24	6				48	31	21	30	-0.007 -0.028		38	38	38
	6001		25 40	12	28		8.25		52	36	24	34	-0.009 -0.034		42	40	42
	6201	(双盖式)	30 40	32	+0.025 0	10			56	40	26	38			46	43	46
	6802		25 35	24	+0.021 0	5			47	32	20	30	-0.007 -0.028		37	37	37
	6902	※VV	25 50	28	7				57	37	25	35			45	45	45
	6002	(非接触式)	30 50	32	9				60	40	28	38			48	46	48
	6202	橡胶密封圈	35 50	35	+0.025 0	11	3.75		64	44	29	42			52	49	52
	6903		30 40	30	+0.021 0	7	2.85		60	38	10	27			48	46	48
	6003	DD	35 50	17	35		10	3.75	66	44	31	42	-0.009 -0.034		54	50	54
	6203	(接触式)	40 50	40	12		3.95		72	50	34	48			60	54	60
对边法兰	6804	橡胶密封圈	35 50	32	7		3.75		60	40	28	38			48	46	38
	6904		35 50	37	9				69	47	34	45			56	54	51
	6004		40 50	42	+0.025 0	12			77	54	36	50			64	59	56
	6204		45 50	47	14		3.95		81	58	40	54	-0.010 -0.040		68	62	59
	6805		35 50	37	7		3.75		69	47	34	45	-0.009 -0.034		56	54	51
	6905		35 50	42	9		3.95		77	54	36	50			64	59	56
	6005		40 60	47	12				88	58	41	54	-0.010 -0.040		72	67	63
	6205		45 50	52	+0.030 0	15	4.2		94	64	45	60			78	72	68
	6806		35 50	42	+0.025 0	7	3.95		77	54	36	50	-0.009 -0.034		64	59	56
	6906		35 50	47	9				88	58	41	54			72	67	63
	6006		40 60	55	13				96	66	48	62	-0.010 -0.040		80	73	70
	6206		50 60	62	16		4.2		104	74	55	70			88	79	75
对边法兰	6007		50 60	35	14										75	44	14
	6207		60 80	72	+0.030 0	17	6	126	88	20	64	84	-0.012 -0.040		105	95	92
	6008		60 70	68	15		5.2	114	82	13	60	78	-0.010 -0.040		96	86	80
	6208		60 80	80	18				134	96	74	92			102	98	56
	6010	ZZ	70	16	6						20		-0.012 -0.047		113		17.5
	6210	(双盖式)	90	90	+0.035 0	20	7	147	110		83	106			126	—	11.2

※ VV(非接触式橡胶密封圈)不适用于型号为623、624、605、606的轴承。※ VV(非接触式橡胶密封圈)、DD(接触式橡胶密封圈)、轴承材质为钢。

① 请注意避让挡圈，挡圈尺寸请参考P892。

② 可选加工



型号				L	型号				L	可选加工代码
代码	轴承型号	密封圈			代码	轴承型号	密封圈			
BFP01	6801	ZZ	25	35	BFP01	6801	ZZ	25	35	
BFP02	6901	OD	25	40	BFP02	6901	OD	25	40	NA

BFP02—6901DD—L40 BFP02—6901DD—L40—NA

数量	1~9	10~
价格	100%	另行报价
未税价(元)		
交货期		
5		

可选加工	不装配轴承、挡圈
代码	NA
可选加工	
技术说明	不装配轴承及挡圈(附带出货)