


微型带凸缘深沟球轴承

双面带防尘盖式

标准型



代码	类型	轴承类型 代码	轴承游隙	轴承精度	后置代码	轴承材质	
						国标	相当
BAL	标准型	6	CO/CN	GB/T 307.1 6级	ZZ(双面带防尘盖)	GCr15	SUJ2
BAL....-SUS						9Cr18Mo	SUS440C

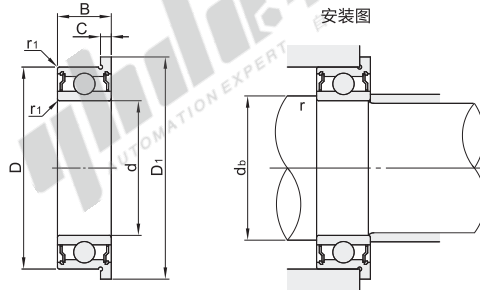

- ① 不承诺品牌。
② 基本额定负载/极限转速/重量值不适用于SUS440C材质。



型号		d	D	B	D ₁	C	r ₁ (min)	基本额定负载(N)		极限转速 rpm (参考)	安装尺寸		重量 (g) (参考)
代码	轴承型号							Cr(动)	Cor(静)		d _b (min)	r (max)	
BAL BAL....-SUS	682ZZ	2	5	2.3	6.1	0.6	0.08	135	40	68000	2.7	0.08	0.23
	692ZZ		3	7.5	0.8	0.15	264	79	60000	3	0.15	0.44	
	682AZZ	2.5	6	2.6	7.1	0.8	0.08	167	59	56000	3.7	0.08	0.41
	692AZZ		7	3.5	8.5	0.9	0.15	308	103	50000	3.85	0.15	0.67
	673ZZ	3	6	2.5	7.2	0.6	0.08	193	75	56000	3.6	0.08	0.25
	683ZZ		7	3	8.1	0.8	0.1	312	104	50400	3.9	0.1	0.52
	693ZZ	4	8	4	9.5	0.9		448	144	48000			0.71
	603ZZ		9	5	10.5	1	0.15	456	151	44000	4.2	0.15	1.6
	623ZZ	5	10	4	11.5			512	179	40000			1.79
	674ZZ		7	2.5	8.2	0.6	0.08	177	70	48000	4.6	0.08	0.34
	684ZZ	6	9		10.3		0.15	512	179	42000	5	0.1	1.13
	694ZZ		11	4	12.5	1		572	220	38000	5.2	0.15	2
	604ZZ	7	12		13.5		0.2	765	280				2.56
	624ZZ		13	5	15			1048	392	32000	5.6	0.2	3.49
	675ZZ	8	8	2.5	9.2	0.6	0.08	173	72	42000		0.08	0.39
	685ZZ		11	5	12.5		0.15	572	225	36000	6.2	0.15	2.17
	695ZZ	9	13	4	15	1	0.2	864	344	34000	6.6	0.2	2.69
	605ZZ		14		16			1064	404	32000			3.89
	625ZZ	10	16		18		0.3	1383	540	28000	7.7	0.3	5.51
	676ZZ		10	3	11.2	0.6	0.1	372	156	36000	6.6	0.1	0.73
	686ZZ	11	13		15	1.1	0.15	864	352		7	0.15	3.03
	696ZZ		15		17	1.2	0.2	1080	424	32000	7.6	0.2	4.29
	606ZZ	12	17		19		0.3	1752	692	30000	8	0.3	6.49
	626ZZ		19		22	1.5		1868	716	25000			9.77
	678ZZ	13	12	3.5	13.6	0.8	0.1	412	201	32000	8.8	0.1	0.85
	688ZZ		16	5	18	1.1	0.2	1288	572	28000	9.6	0.2	4.46
	698ZZ	14	19	6	22	1.5	0.3	1592	692		10	0.3	8.39
	608ZZ		22	7	25		0.3	2680	1120	27000			13
	6700ZZ	15	15	4	16.5	0.8	0.15	684	348	12000	10.3	0.15	2.09
	6800ZZ		19	5	21	1	0.3	1372	672	29000	12	0.3	6.09
	6900ZZ	16	22	6	25	1.5		2156	1018	27200	13.2		11.09
	6701ZZ		18	4	19.5	0.8	0.2	740	424	10000	12.4	0.2	3.39
	6801ZZ	17	21	5	23	1.1	0.3	1532	832	26000	14	0.3	7.09
	6901ZZ		24	6	26.5	1.5		2308	1172	24000			13.19
	6702ZZ	18	21	4	22.5	0.8	0.2	749	465	8800	15.4	0.2	3.89
	6802ZZ		24	5	26	1.1	0.3	1658	1002	22000	17	0.3	8.29
	6902ZZ	19	28	7	30.5	1.5		3456	1807	20000			19.89
	6703ZZ		23	4	24.5	0.8	0.2	800	526	7600	17.4	0.2	4.39
	6803ZZ	20	26	5	28	1.1	0.3	1786	1164	20000	19	0.3	8.89
	6903ZZ		30	7	32.5	1.5		3670	2052	18000			21.39
	6704ZZ	21	27	4	28.5	0.8	0.2	832	583	6800	20.4	0.2	6.29
	6804ZZ		32	7	35	1.5		3212	1969	16000	22		19.79
	6904ZZ*	22	37	9	40	2	0.3	51048	2945	15000		0.3	42.79
	6805ZZ		7		40	1.5		3442	2345	14000			26.09
	6905ZZ	23	42	9	45	2		5600	3632	12000	27		50.19

① 带*规格仅适用SUJ2材质。

① 1Kg=9.81N



型号		d	D
代码	轴承型号		
BAL	682ZZ	2	5
	692ZZ		6

BAL682ZZ



优惠价	
数量	1~9
价格	100% 另行报价



交货期
5