


内六角平圆头螺钉

代码	类型	螺纹	材质	硬度	表面处理	强度等级
TAR01	内六角平圆头螺钉	粗牙	10B21	37~42HRC	发黑	10.9
TAR04					镀镍	
TAR02			SUS304	—	A2-70	
TAR05			SUS316	—	A4-70	

TAR01



TAR02/05

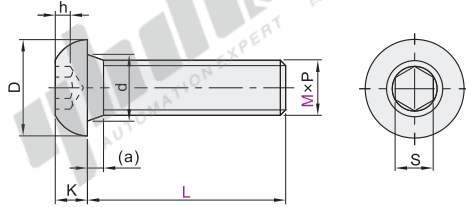

适用标准: ISO 7380-1-2011
JIS B 1174-2006
GB/T 70.2-2008

视角标准: 第一视角

10B21(发黑)

型号	L										P	D	K	S	h	d	a		
代码	M											螺距				(min)			
TAR01	2	4 5 6 8 10 12 16 20											0.4	3.5	1.3	1.35	0.6	2.5	0.8
	2.5	4 5 6 8 10 12 16 20 30											0.45	4.7	1.5	1.56	0.8		0.6
	3	4 6 8 10 12 14 16 18 20 25 30 35 40 45 50											0.5	5.7	1.65	2	1.04	3.6	1
	4	6 8 10 12 16 20 25 30 35 40 45 50											0.7	7.6	2.2	2.5	1.3	4.7	1.4
	5	6 8 10 12 14 16 20 25 30 35 40 45 50											0.8	9.5	2.75	3	1.56	5.7	1.6
	6	8 10 12 14 16 20 25 30 35 40 45 50 55 60											1.0	10.5	3.3	4	2.08	6.8	2
	8	10 12 16 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100											1.25	14	4.4	5	2.6	9.2	2.5
	10	16 20 25 30 35 40 45 50 55 60 65 70 75 80 90 100											1.5	17.5	5.5	6	3.12	11.2	3
	12	16 20 25 30 35 40 45 50 55 60 65 70 75 80 90 100											1.75	21	6.6	8	4.16	14.2	3.5
	16	30 35 40 45 50 55 60 65 70 75 80 90 100											2.0	28	8.8	10	5.2	18.2	4

10B21(镀镍)

型号	L										P	D	K	S	h	d	a		
代码	M											螺距				(min)			
TAR04	3	6 8 10 12 16 20 25 30 35 40 45 50											0.5	5.7	1.65	2	1.04	3.6	1
	4	6 8 10 12 14 16 18 20 25 30 35 40 45 50											0.7	7.6	2.2	2.5	1.3	4.7	1.4
	5	6 8 10 12 14 16 20 25 30 35 40 45 50											0.8	9.5	2.75	3	1.56	5.7	1.6
	6	8 10 12 16 18 20 25 30 35 40 45 50 55 60 65 70											1.0	10.5	3.3	4	2.08	6.8	2
	8	10 12 16 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90											1.25	14	4.4	5	2.6	9.2	2.5
	10	16 20 25 30 35 40 45 50 55 60											1.5	17.5	5.5	6	3.12	11.2	3

SUS304

型号	L										P	D	K	S	h	d	a		
代码	M											螺距				(min)			
TAR02	2.5	3 4 5 6 8 10 12 16 18 20 25											0.45	4.7	1.5	1.5	0.8	2.5	0.6
	3	4 6 8 10 12 14 16 18 20 25 30 35 40 45 50											0.5	5.7	1.65	2	1.04	3.6	1
	4	6 8 10 12 14 16 18 20 25 30 35 40 45 50 55 60 65 70 75											0.7	7.6	2.2	2.5	1.3	4.7	1.4
	5	6 8 10 12 14 16 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100											0.8	9.5	2.75	3	1.56	5.7	1.6
	6	8 10 12 14 16 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100											1.0	10.5	3.3	4	2.08	6.8	2
	8	12 14 16 18 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100											1.25	14	4.4	5	2.6	9.2	2.5
	10	16 18 20 22 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100											1.5	17.5	5.5	6	3.12	11.2	3
	12	20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 100											1.75	21	6.6	8	4.16	14.2	3.5

SUS316

型号	L										P	D	K	S	h	d	a		
代码	M											螺距				(min)			
TAR05	3	6 8 10 12 18 35											0.5	5.7	1.65	2	1.04	3.6	1
	4	6 8 10 12 14 16 20 25 30 35 40 55 65 75											0.7	7.6	2.2	2.5	1.3	4.7	1.4
	5	10 12 16 20 25 30 35 40 45 50 55 65 70											0.8	9.5	2.75	3	1.56	5.7	1.6
	6	10 12 16 20 25 30 35 40 45 50											1.0	10.5	3.3	4	2.08	6.8	2
	8	12 16 20 25 30 35 40 45 50											1.25	14	4.4	5	2.6	9.2	2.5
	10	16 20 25 30 35 40 45 50 60 70 80											1.5	17.5	5.5	6	3.12	11.2	3
	12	25 30 35 40											1.75	21	6.6	8	4.16	14.2	3.5

垫圈·吊环
螺帽·螺母
C2

请按图示订货

型号		L										
代码	M											
(TAR01)	2	4 5 6 8 10 12										
(TAR02)	3	4 6 8 10 12										
(TAR05)	4	6 8 10 12										

TAR01—M4—L12



优惠价
数量 1~49 50~
价格 100% 另行报价

未税价(元)



交货期
5