


系列	类型	接插方式	材质		
			外壳	绝缘体	接触体
WS系列	面板安装方型母插座	螺纹连接	锌铝合金(镀铬)	热塑塑料PPS(耐高温260°C)	铜(镀金)

WEIPU 威浦电器

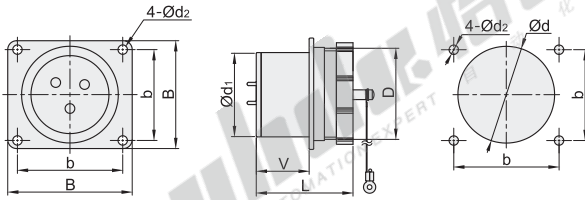

□ 安装开孔尺寸


插座与面板配合直径	16	20	24	28
Ød1	15.8	19.8	23.8	27.8
D	M18×1	M22×1	M26×1	M30×1
V	9.7	9.8	10	9.8
L	21.6	23	23	23
b	20	22	26	30
B	26	29	32	36
Ød	16.5	20.5	24.5	28.5
Ød2	3.2	3.2	3.2	3.2

单位: mm




□ 孔位排列图(从针的方向看)


WS16系列




WS20系列



WS24系列



WS28系列



代码	插座与面板配合直径	芯数	接插件种类	接线方式	适配插针类型		
					中继公插头	弯角公插头	
WS16K2Z	16	2	插孔	焊接	WS16J2TQ		
WS16K3Z		3			WS16J3TQ		
WS16K4Z		4			WS16J4TQ		
WS16K5Z		5			WS16J5TQ	—	
WS16K7Z		7			WS16J7TQ		
WS16K9Z		9			WS16J9TQ		
WS16K10Z		10			WS16J10TQ		
WS20K2Z		20			2	WS20J2TQ	WS20J2TS
WS20K3Z					3	WS20J3TQ	WS20J3TS
WS20K4Z	4				WS20J4TQ	WS20J4TS	
WS20K5Z	5				WS20J5TQ	WS20J5TS	
WS20K7Z	7				WS20J7TQ	WS20J7TS	
WS20K9Z	9				WS20J9TQ	WS20J9TS	
WS20K12Z	12				WS20J12TQ	WS20J12TS	
WS24K2Z	24				2	WS24J2TQ	WS24J2TS
WS24K3Z					3	WS24J3TQ	WS24J3TS
WS24K4Z		4			WS24J4TQ	WS24J4TS	
WS24K9Z		9			WS24J9TQ	WS24J9TS	
WS24K10Z		10			WS24J10TQ	WS24J10TS	
WS24K12Z		12			WS24J12TQ	WS24J12TS	
WS24K19Z		19			WS24J19TQ	WS24J19TS	
WS28K3Z		28			3	WS28J3TQ	WS28J3TS
WS28K4Z					4	WS28J4TQ	WS28J4TS
WS28K7Z	7				WS28J7TQ	WS28J7TS	
WS28K8Z	8		WS28J8TQ	WS28J8TS			
WS28K10Z	10		WS28J10TQ	WS28J10TS			
WS28K12Z	12		WS28J12TQ	WS28J12TS			
WS28K16Z	16		WS28J16TQ	WS28J16TS			
WS28K20Z	20		WS28J20TQ	WS28J20TS			
WS28K24Z	24		WS28J24TQ	WS28J24TS			
WS28K26Z	26	WS28J26TQ	WS28J26TS				

① 适配插针: 中继公插头详见P557, 弯角公插头详见P558.

② 插座与面板配合直径为16的连接器无防尘盖.

□ 电气技术特性

WS16系列

芯数	2	3	4	5	7	9	10
额定电流(A)	10						
接触件直径	Ø1.5x2	Ø1.5x3	Ø1x4	Ø1x5	Ø1x7	Ø1x9	Ø1x10
工作电压(V)	500			400			
耐压(V)	1500			1200			
接触电阻(mΩ)	2.5		5				
线规(mm²/AWG)	≤2/14						

WS20系列

芯数	2	3	4	5	7	9	12	
额定电流(A)	25		10					5
接触件直径	Ø2.5x2	Ø2.5x3	Ø2.5x4	Ø1.5x5	Ø1.5x7	Ø1x9	Ø1x12	
工作电压(V)	500			400				
耐压(V)	1500			1200				
接触电阻(mΩ)	1		2.5		5			
线规(mm²/AWG)	≤4/11		≤2/14		≤0.75/18			

WS24系列


芯数	2	3	4	9	10	12	19	
额定电流(A)	25		5.25					10
接触件直径	Ø2.5x2	Ø2.5x3	Ø2.5x4	Ø1.5x9	Ø1.5x10	Ø1.5x12	Ø1x19	
工作电压(V)	500			400				
耐压(V)	1500			1200				
接触电阻(mΩ)	1		5.1		2.5		5	
线规(mm²/AWG)	≤4/11		≤0.75/18, 54/11		≤2/14			

WS28系列

芯数	3	4	7	8	10	12	16	20	24	26	
额定电流(A)	50		25					10			
接触件直径	Ø3.5x3	Ø2.5x4	Ø2.5x7	Ø2.5x8	Ø2.5x10	Ø1.5x12	Ø1.5x16	Ø1x20	Ø1x24	Ø1x26	
工作电压(V)	500			400							
耐压(V)	1500			1200							
接触电阻(mΩ)	0.5		1		2.5			5			
线规(mm²/AWG)	≤10/7		≤4/11		≤2/14			≤0.75/18			

□ 技术参数

接插方式	螺纹连接
接线方式	焊接: Ø1, Ø2.5, Ø3.5, Ø5.5
接插次数	500
温度范围	-40°C ~ +85°C
绝缘电阻	2000MΩ



请按图示订货

WS16K2Z

WS16K3Z