


代码	类型		材质					
			护套	法兰	发热丝	引出线	线缆	绝缘粉末
ZIM93	法兰固定型	标准型	SUS321	SUS304	Ni80Cr20	纯镍耐热线	Ni-GB	MgO
E-ZIM93		经济型				铜镀镍		

注意事项

- 最高使用温度为铠装管部温度，导线最高耐温200℃，导线务必从安装孔引出；
- 请勿使加热管露出被加热物体在大气中空烧；
- 使用温度500℃以下。

① 不适用在运动设备上，需单独定制。




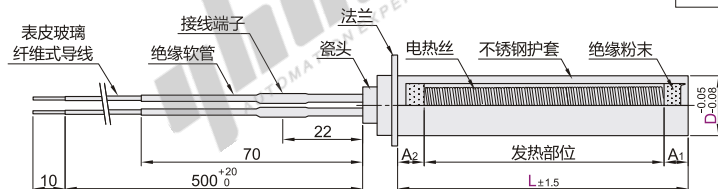


法兰尺寸

D6.5

D8/10/12

D16



标准型

代码	型号	L	额定功率 W _{±5%}	额定电压 V _{±5%}	冷端长度 A	发热部长度
ZIM93	6.5	50	110	220	A = A ₁ + A ₂ L = 50时 A ₁ = 5mm, A ₂ = 5mm 100 ≤ L ≤ 200时 A ₁ = 7mm, A ₂ = 10mm 200 < L ≤ 300时 A ₁ = 10mm, A ₂ = 15mm	L - A
		100	250			
		100	320			
		150	270			
		150	500			
	8	180	330			
		200	620			
		200	690			
		250	800			
		250	700			
	10	150	500			
		180	720			
		200	450			
		200	650			
		250	860			
	12	250	880			
		250	1100			
		180	700			
		200	1050			
		250	1300			
	16	200	1200			
		300	1500			

① 其它长度可定制。

经济型

代码	型号	L	额定功率 W _{±5%}	额定电压 V _{±5%}	冷端长度 A	发热部长度
E-ZIM93	6.5	50	110	220	A = A ₁ + A ₂ 50 ≤ L ≤ 200时 A ₁ = 7mm, A ₂ = 10mm	L - A
		100	250			
		100	320			
		150	270			
		150	500			
	8	180	330			
		200	620			
		200	690			
		250	800			
		250	700			
	10	150	500			
		180	720			
		200	450			
		200	650			
			860			

① 其它长度可定制。

标准型

代码	D	L	额定功率 W _{±5%}	额定电压 V _{±5%}
ZIM93	6.5	50	110	220
		100	250	

ZIM93 — D6.5 — L50 — W110 — V220

